


HOFMANN & VRATNY — SC MILLING CUTTERS EN

HARDENED STEEL

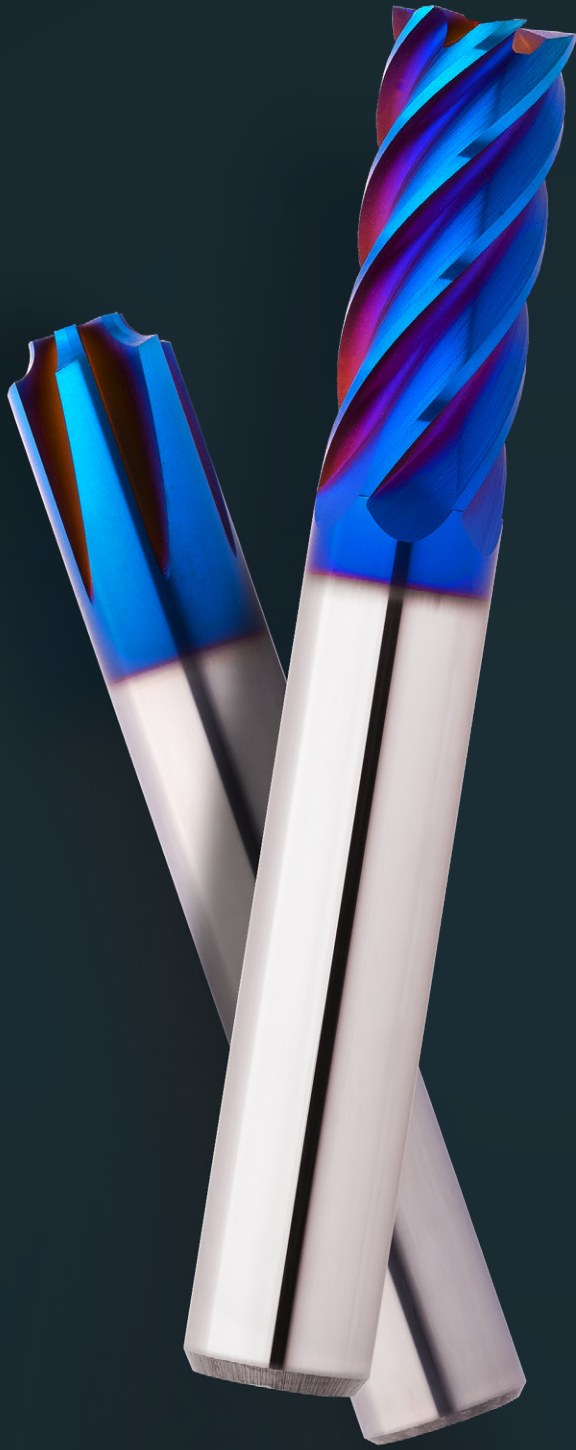

Expert

2022



THE RIGHT MILLING CUTTER. AT ALL TIMES.

Welcome to Hofmann & Vratny. As the leading manufacturer of solid carbide milling cutters, we enable companies throughout the world to manufacture their products.

Every day, our strong team works on our collective goal of producing the best milling cutters in the world. Companies from the medical industry, semiconductor industry, machine and plant construction, aviation, aerospace engineering and, not least, the automotive industry have been using our milling cutters for many years now. Quality - Made in Bavaria.

The success of our company is built on innovation, a culture of cooperation, open dealings on an equal footing and many years of successful and trustful collaboration with our business partners. You can count on us, our milling cutters and our irrepensible drive to shape the future of the industry together. To us, that means shaping tomorrow.


Andreas Vratny

Zdenek Vratny

Marius Heinemann-Grüder



HARDENED STEEL

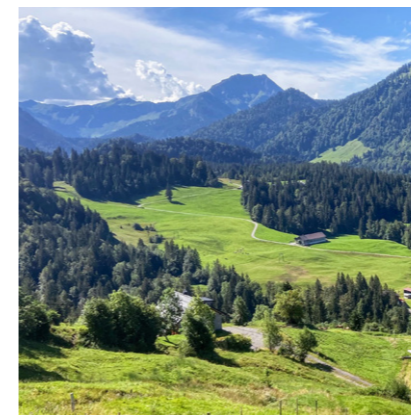

2 Mio.

MILLING CUTTERS PRODUCED EVERY YEAR

MADE IN BAVARIA


Our milling cutters are used by companies all over the world. Still they all have the same origin: Our production sites in Bavaria, Germany.

As a traditional company, we are proud of our strong connection to the region. Ever since we were founded, we have been firmly tied to our homeland, and our team works on producing the best milling cutters in the world in a familial environment. Genuine quality work, the highest-quality craftsmanship and a strong promotion and retention of our talent: This is what Made in Bavaria means to us.



PROVEN QUALITY



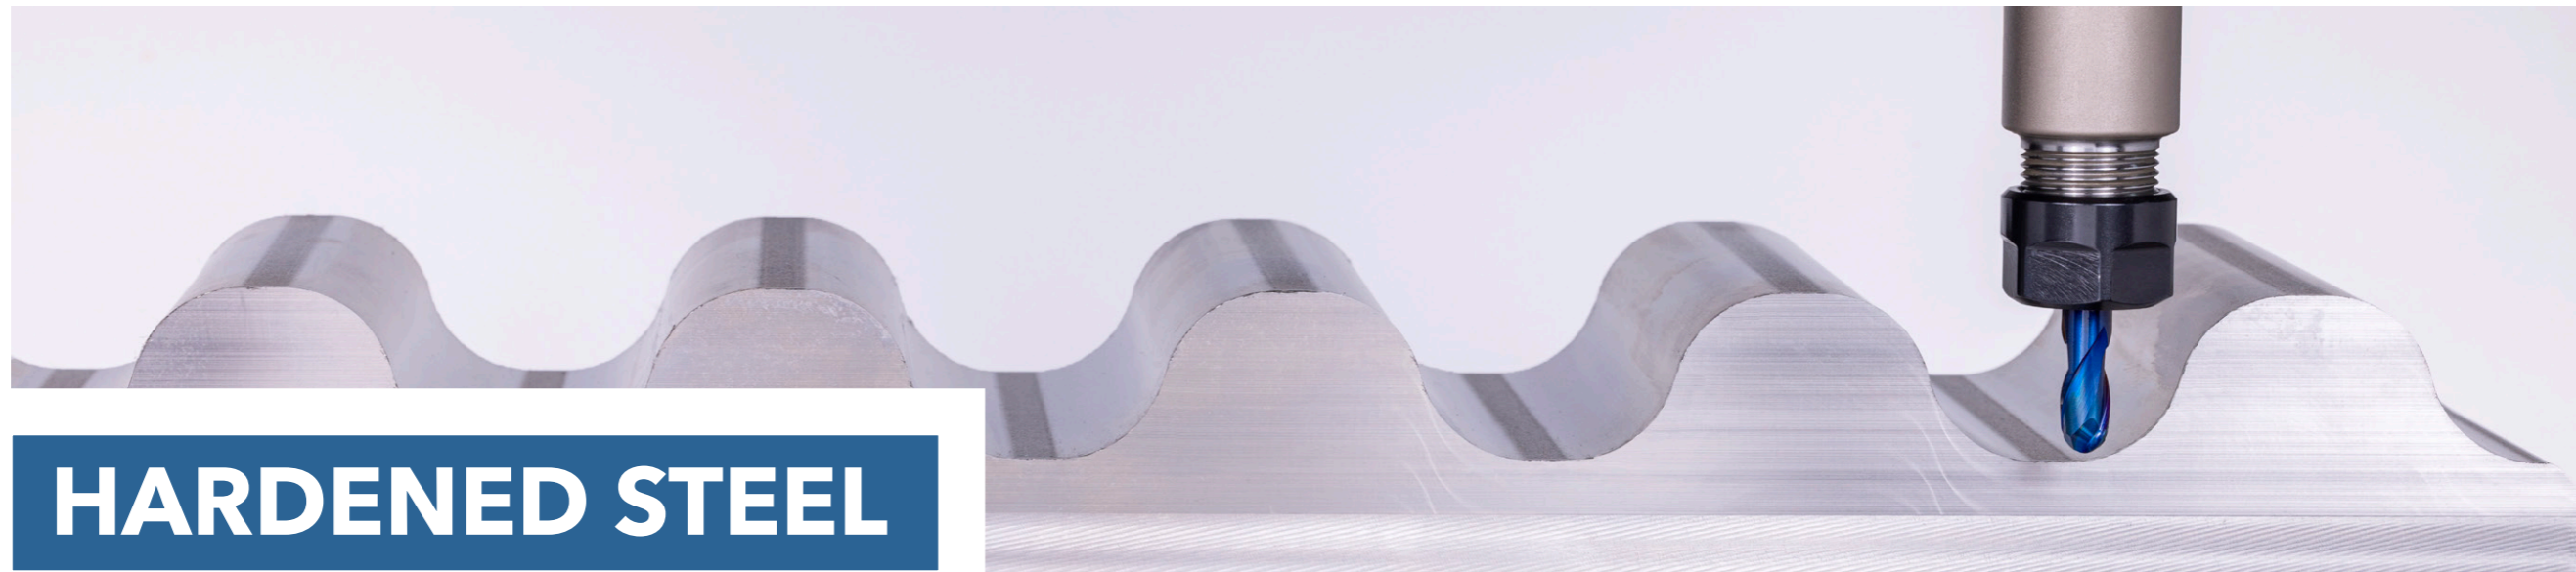

HARDENED STEEL

2
PRODUCTION
SITES

46
YEARS OF
EXPERIENCE

130
MOTIVATED
EMPLOYEES

THE FAMOUS BLUE ORIGINAL.

The H&V Expert hard machining milling cutters have been specially designed and developed to meet the requirements of hardened steel. Selected ultra-fine-grain substrate, proven geometries, coordinated edge preparation and the blue coating, which has been known for years, form the perfect synergy for safe machining of hardened steels up to 70 HRC.

QUALITY
PROCESS RELIABILITY
ECONOMIC EFFICIENCY

K201523 | PERFORMMAKER Z4-10 2XD ADN

HELICAL PITCH

Extremely soft cut at up to 70 HRC.

GEOMETRY

Refined geometry for reliable chip disposal and consistently high process reliability.

MATERIAL

Solid carbide specially developed for hardened steels.

BROW

Radius and brow geometries optimized to prevent premature breakouts.

BLADES

Cutting edge preparation that has been tried and tested for decades and optimised to perfection.

COATING

The original blue coating for hard machining, often imitated but never achieved.



TABLE OF CONTENTS

PERFORMMAKER

K201523 | Performmaker Z4-10 2xD ADN _____ 10



K201533 | Performmaker Z6-10 3xD ADN _____ 12



FORMMAKER

K202223 | Formmaker Z4 1xD ADN _____ 14



K202233 | Formmaker Z4 1xD long ADN _____ 18



K202253 | Formmaker Z4-6 1xD ADN _____ 22



K202293 | Formmaker Z6-10 2xD ADN _____ 26



K202303 | Formmaker Z6-10 3xD ADN _____ 28



K202307 | Formmaker Z8-10 3.5xD ADN _____ 30



BLADEMAKER

K207013 | Blademaker Z2-5 0.5xD short ADN _____ 32



K207018 | Blademaker Z2-5 0.5xD long ADN _____ 34



ROWMAKER

K203103 | Rowmaker Z2 1.5xD short ADN _____ 36



K203143 | Rowmaker Z2 2.5xD long ADN _____ 40



K203153 | Rowmaker Z2 1.5xD long ADN _____ 44



K203333 | Rowmaker Z4 1.5xD short ADN _____ 46



K203343 | Rowmaker Z4 1.5xD long ADN _____ 48



CHAMFMAKER

K205153 | Chamfmaker Z3-4 60° ADN _____ 50



K205154 | Chamfmaker Z4 60° ADN _____ 52



K205163 | Chamfmaker Z3-4 90° ADN _____ 54



K205164 | Chamfmaker Z4 90° ADN _____ 56



ROUNDMAKER

K204108 | Roundmaker Z6 ADN _____ 58



PERFORMMAKER MICRO

K201122 | Performmaker Micro Z2 ADN _____ 60



FORMMAKER MICRO

K202082 | Formmaker Micro Z2 R0.1 ADN _____ 72



K202092 | Formmaker Micro Z2 R0.2 ADN _____ 78



K202102 | Formmaker Micro Z2 R0.3 ADN _____ 84



K202112 | Formmaker Micro Z2 R0.5 ADN _____ 90



ROWMAKER MICRO

K203206 | Rowmaker Micro Z2 ADN _____ 94



K203212 | Rowmaker Micro Z2 long ADN _____ 102



EXPLANATION _____ 106

MATERIAL OVERVIEW _____ 108

TECHNICAL FORMULAS _____ 109

GENERAL TERMS OF SALE _____ 110

DISCOVER OUR H&V PRODUCT RANGE _____ 115


| | |
|-----------|----------------|
| Cooling | |
| Tolerance | e8 |
| Coating | AlphaDura Navy |

| | | | |
|-------------|------------|------------|--|
| Strategy | ETC | HPC | |
| Application | | | |
| Features | HA | | |

- Ultrafine carbide grade specially developed for machining hardened steels
- Adapted rake angle for safe milling up to 70 HRC
- Defined cutting edge preparation for homogeneous wear

For roughing and finishing

Reduce the axial depth of cutting with increasing hardness

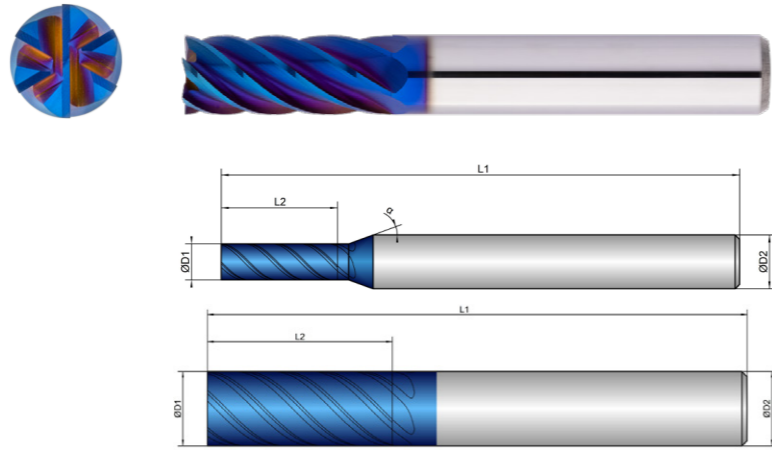

Roughing



Finishing



| | D1 mm ø | L2 mm | L1 mm | D2 mm ø | z # | ° | α ° |
|--------------|-------------------|--------------|--------------|-------------------|------------|-------|-------------------|
| 2X8 | 2.0 | 8.0 | 58.0 | 6.0 | 4 | 37.5 | 12 |
| 3X12 | 3.0 | 12.0 | 58.0 | 6.0 | 4 | 37.5 | 12 |
| 4X13 | 4.0 | 13.0 | 58.0 | 6.0 | 4 | 37.5 | 12 |
| 5X15 | 5.0 | 15.0 | 58.0 | 6.0 | 6 | 37.5 | 12 |
| 6X16 | 6.0 | 16.0 | 58.0 | 6.0 | 6 | 37.5 | |
| 8X22 | 8.0 | 22.0 | 70.0 | 8.0 | 6 | 37.5 | |
| 10X25 | 10.0 | 25.0 | 73.0 | 10.0 | 6 | 37.5 | |
| 12X28 | 12.0 | 28.0 | 84.0 | 12.0 | 6 | 37.5 | |
| 14X30 | 14.0 | 30.0 | 84.0 | 14.0 | 6 | 37.5 | |
| 16X36 | 16.0 | 36.0 | 93.0 | 16.0 | 8 | 37.5 | |
| 18X36 | 18.0 | 36.0 | 93.0 | 18.0 | 10 | 37.5 | |
| 20X41 | 20.0 | 41.0 | 104.0 | 20.0 | 10 | 37.5 | |

| Dimension | Ø2 | Ø3 | Ø4 | Ø5 | Ø6 | Ø8 | Ø10 | Ø12 | Ø14 | Ø16 |
|--------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Infeed in mm | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max |
| Application | | | | | | | | | | |

| H | Material | Hardness in HRC | Feed (mm/Z) | Vc (m/min) | | | | | | | | | |
|-----|----------------|-----------------|-------------|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 1.1 | HARDENED STEEL | 46-55 | 130 | 0.02 | 0.025 | 0.03 | 0.035 | 0.04 | 0.045 | 0.05 | 0.055 | 0.055 | 0.07 |
| 1.2 | | 56-60 | 100 | 0.018 | 0.022 | 0.028 | 0.032 | 0.038 | 0.042 | 0.047 | 0.052 | 0.052 | 0.065 |
| 1.3 | | 60-65 | 85 | 0.015 | 0.02 | 0.025 | 0.03 | 0.035 | 0.04 | 0.045 | 0.05 | 0.05 | 0.06 |
| 1.4 | | 66-70 | 70 | 0.012 | 0.015 | 0.02 | 0.025 | 0.03 | 0.03 | 0.035 | 0.04 | 0.04 | 0.05 |

| Dimension | Ø18 | Ø20 |
|--------------|--------------------------|--------------------------|
| Infeed in mm | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max |
| Application | | |

| H | Material | Hardness in HRC | Feed (mm/Z) | Vc (m/min) | |
|-----|----------------|-----------------|-------------|------------|-------|
| | | | | fz | fz |
| 1.1 | HARDENED STEEL | 46-55 | 130 | 0.07 | 0.08 |
| 1.2 | | 56-60 | 100 | 0.065 | 0.075 |
| 1.3 | | 60-65 | 85 | 0.06 | 0.07 |
| 1.4 | | 66-70 | 70 | 0.05 | 0.06 |

| | |
|-----------|----------------|
| Cooling | |
| Tolerance | e8 |
| Coating | AlphaDura Navy |


| | | | |
|-------------|------------|------------|--|
| Strategy | ETC | HPC | |
| Application | | | |
| Features | HA | | |

- Ultrafine carbide grade specially developed for machining hardened steels
- Adapted rake angle for safe milling up to 70 HRC
- Defined cutting edge preparation for homogeneous wear



For roughing and finishing

Reduce the axial depth of cutting with increasing hardness

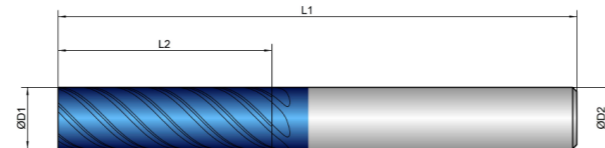

Roughing



Finishing



| K201533 | D1 mm ø | L2 mm | L1 mm | D2 mm ø | z # | ° |
|---------|-------------------|--------------|--------------|-------------------|------------|-------|
| 6x21 | 6.0 | 21.0 | 65.0 | 6.0 | 6 | 37.5 |
| 8x28 | 8.0 | 28.0 | 75.0 | 8.0 | 6 | 37.5 |
| 10x35 | 10.0 | 35.0 | 85.0 | 10.0 | 6 | 37.5 |
| 12x45 | 12.0 | 45.0 | 100.0 | 12.0 | 6 | 37.5 |
| 14x45 | 14.0 | 45.0 | 100.0 | 14.0 | 6 | 37.5 |
| 16x50 | 16.0 | 50.0 | 110.0 | 16.0 | 8 | 37.5 |
| 16x65 | 16.0 | 65.0 | 125.0 | 16.0 | 8 | 37.5 |
| 18x54 | 18.0 | 54.0 | 114.0 | 18.0 | 10 | 37.5 |
| 20x55 | 20.0 | 55.0 | 126.0 | 20.0 | 10 | 37.5 |
| 20x70 | 20.0 | 70.0 | 135.0 | 20.0 | 10 | 37.5 |
| 20x75 | 20.0 | 75.0 | 135.0 | 20.0 | 10 | 37.5 |
| 25x75 | 25.0 | 75.0 | 150.0 | 25.0 | 10 | 37.5 |


| Dimension | Ø6 | Ø8 | Ø10 | Ø12 | Ø14 | Ø16 | Ø18 | Ø20 | Ø25 |
|--------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Infeed in mm | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max | ae= 0.05xD ap= L2 max |
| Application | | | | | | | | | |

| H | Material | Hardness in HRC | Feed (mm/Z) | Vc (m/min) | | | | | | | | | |
|-----|----------------|-----------------|-------------|------------|-------|-------|-------|-------|-------|-------|-------|-------|----|
| | | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 1.1 | HARDENED STEEL | 46-55 | 120 | 0.04 | 0.045 | 0.05 | 0.055 | 0.055 | 0.07 | 0.07 | 0.08 | 0.085 | |
| 1.2 | | 56-60 | 90 | 0.038 | 0.042 | 0.047 | 0.052 | 0.052 | 0.065 | 0.065 | 0.075 | 0.08 | |
| 1.3 | | 60-65 | 75 | 0.035 | 0.04 | 0.045 | 0.05 | 0.05 | 0.06 | 0.06 | 0.07 | 0.075 | |
| 1.4 | | 66-70 | 60 | 0.03 | 0.03 | 0.035 | 0.04 | 0.04 | 0.05 | 0.05 | 0.06 | 0.065 | |

| | |
|-----------|----------------|
| Cooling | |
| Tolerance | e8 |
| Coating | AlphaDura Navy |

| | | | |
|-------------|------------|------------|--|
| Strategy | HSC | HPC | |
| Application | | | |
| Features | HA | ≠ | |

- Ultrafine carbide grade specially developed for machining hardened steels
- Adapted rake angle for safe milling up to 70 HRC
- Defined cutting edge preparation for homogeneous wear

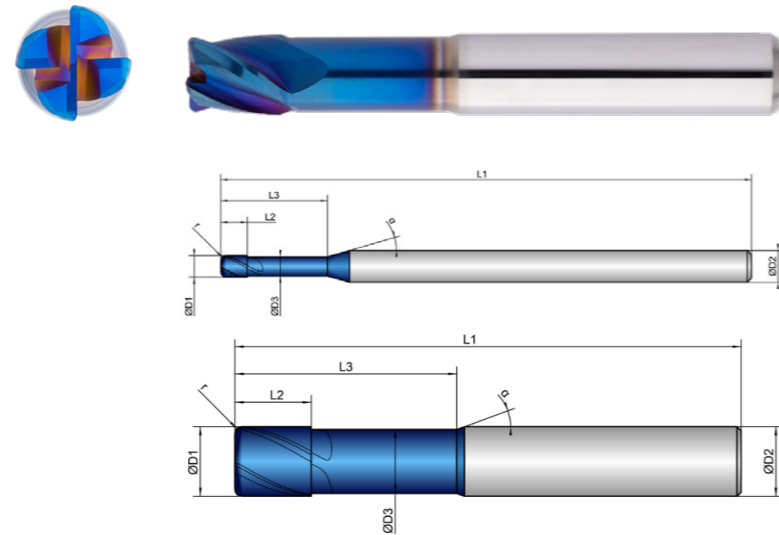

- Multipass milling of 3D contours

- Radius tolerance $r \leq 1.5$ mm: ± 0.003 mm
- Radius tolerance $r > 1.5$ mm: ± 0.005 mm

Roughing



Finishing



| K202223 | D1 mm ∅ | D3 mm ∅ | L2 mm | L3 mm | L1 mm | D2 mm ∅ | z # | r mm | | α ° |
|---------|---------------|---------------|----------|----------|----------|---------------|--------|---------|----|---------------|
| 1/0,1 | 1.0 | 0.85 | 1.5 | 10.0 | 50.0 | 3.0 | 4 | 0.10 | 35 | 20 |
| 1/0,2 | 1.0 | 0.85 | 1.5 | 10.0 | 50.0 | 3.0 | 4 | 0.20 | 35 | 20 |
| 2/0,2 | 2.0 | 1.8 | 2.5 | 12.0 | 50.0 | 3.0 | 4 | 0.20 | 35 | 20 |
| 2/0,3 | 2.0 | 1.8 | 2.5 | 12.0 | 50.0 | 3.0 | 4 | 0.30 | 35 | 20 |
| 2/0,5 | 2.0 | 1.8 | 2.5 | 12.0 | 50.0 | 3.0 | 4 | 0.50 | 35 | 20 |
| 3/0,25 | 3.0 | 2.7 | 4.0 | 14.0 | 50.0 | 3.0 | 4 | 0.25 | 35 | 20 |
| 3/0,3 | 3.0 | 2.7 | 4.0 | 14.0 | 50.0 | 3.0 | 4 | 0.30 | 35 | 20 |
| 3/0,5 | 3.0 | 2.7 | 4.0 | 14.0 | 50.0 | 3.0 | 4 | 0.50 | 35 | 20 |
| 3/1 | 3.0 | 2.7 | 4.0 | 14.0 | 50.0 | 3.0 | 4 | 1.00 | 35 | 20 |
| 4/0,2 | 4.0 | 3.7 | 5.0 | 16.0 | 50.0 | 4.0 | 4 | 0.20 | 35 | 20 |
| 4/0,25 | 4.0 | 3.7 | 5.0 | 16.0 | 50.0 | 4.0 | 4 | 0.25 | 35 | 20 |
| 4/0,4 | 4.0 | 3.7 | 5.0 | 16.0 | 50.0 | 4.0 | 4 | 0.40 | 35 | 20 |
| 4/0,5 | 4.0 | 3.7 | 5.0 | 16.0 | 50.0 | 4.0 | 4 | 0.50 | 35 | 20 |
| 4/1 | 4.0 | 3.7 | 5.0 | 16.0 | 50.0 | 4.0 | 4 | 1.00 | 35 | 20 |
| 5/0,25 | 5.0 | 4.6 | 6.0 | 18.0 | 54.0 | 5.0 | 4 | 0.25 | 35 | 20 |
| 5/0,5 | 5.0 | 4.6 | 6.0 | 18.0 | 54.0 | 5.0 | 4 | 0.50 | 35 | 20 |

| K202223 | D1 mm ∅ | D3 mm ∅ | L2 mm | L3 mm | L1 mm | D2 mm ∅ | z # | r mm | | α ° |
|---------|---------------|---------------|----------|----------|----------|---------------|--------|---------|----|---------------|
| 5/1 | 5.0 | 4.6 | 6.0 | 18.0 | 54.0 | 5.0 | 4 | 1.00 | 35 | 20 |
| 6/0,25 | 6.0 | 5.5 | 7.0 | 21.0 | 58.0 | 6.0 | 4 | 0.25 | 35 | 20 |
| 6/0,5 | 6.0 | 5.5 | 7.0 | 21.0 | 58.0 | 6.0 | 4 | 0.50 | 35 | 20 |
| 6/0,8 | 6.0 | 5.5 | 7.0 | 21.0 | 58.0 | 6.0 | 4 | 0.80 | 35 | 20 |
| 6/1 | 6.0 | 5.5 | 7.0 | 21.0 | 58.0 | 6.0 | 4 | 1.00 | 35 | 20 |
| 6/1,5 | 6.0 | 5.5 | 7.0 | 21.0 | 58.0 | 6.0 | 4 | 1.50 | 35 | 20 |
| 6/2 | 6.0 | 5.5 | 7.0 | 21.0 | 58.0 | 6.0 | 4 | 2.00 | 35 | 20 |
| 8/0,25 | 8.0 | 7.4 | 9.0 | 27.0 | 64.0 | 8.0 | 4 | 0.25 | 35 | 20 |
| 8/0,5 | 8.0 | 7.4 | 9.0 | 27.0 | 64.0 | 8.0 | 4 | 0.50 | 35 | 20 |
| 8/0,8 | 8.0 | 7.4 | 9.0 | 27.0 | 64.0 | 8.0 | 4 | 0.80 | 35 | 20 |
| 8/1 | 8.0 | 7.4 | 9.0 | 27.0 | 64.0 | 8.0 | 4 | 1.00 | 35 | 20 |
| 8/1,5 | 8.0 | 7.4 | 9.0 | 27.0 | 64.0 | 8.0 | 4 | 1.50 | 35 | 20 |
| 8/2 | 8.0 | 7.4 | 9.0 | 27.0 | 64.0 | 8.0 | 4 | 2.00 | 35 | 20 |
| 8/2,5 | 8.0 | 7.4 | 9.0 | 27.0 | 64.0 | 8.0 | 4 | 2.50 | 35 | 20 |
| 8/3 | 8.0 | 7.4 | 9.0 | 27.0 | 64.0 | 8.0 | 4 | 3.00 | 35 | 20 |
| 10/0,25 | 10.0 | 9.2 | 11.0 | 32.0 | 73.0 | 10.0 | 4 | 0.25 | 35 | 20 |
| 10/0,5 | 10.0 | 9.2 | 11.0 | 32.0 | 73.0 | 10.0 | 4 | 0.50 | 35 | 20 |
| 10/0,8 | 10.0 | 9.2 | 11.0 | 32.0 | 73.0 | 10.0 | 4 | 0.80 | 35 | 20 |
| 10/1 | 10.0 | 9.2 | 11.0 | 32.0 | 73.0 | 10.0 | 4 | 1.00 | 35 | 20 |
| 10/1,5 | 10.0 | 9.2 | 11.0 | 32.0 | 73.0 | 10.0 | 4 | 1.50 | 35 | 20 |
| 10/2 | 10.0 | 9.2 | 11.0 | 32.0 | 73.0 | 10.0 | 4 | 2.00 | 35 | 20 |
| 10/3 | 10.0 | 9.2 | 11.0 | 32.0 | 73.0 | 10.0 | 4 | 3.00 | 35 | 20 |
| 10/3,5 | 10.0 | 9.2 | 11.0 | 32.0 | 73.0 | 10.0 | 4 | 3.50 | 35 | 20 |
| 12/0,5 | 12.0 | 9.2 | 12.0 | 38.0 | 84.0 | 12.0 | 4 | 0.50 | 35 | 20 |
| 12/1 | 12.0 | 9.2 | 12.0 | 38.0 | 84.0 | 12.0 | 4 | 1.00 | 35 | 20 |
| 12/1,5 | 12.0 | 9.2 | 12.0 | 38.0 | 84.0 | 12.0 | 4 | 1.50 | 35 | 20 |
| 12/2 | 12.0 | 9.2 | 12.0 | 38.0 | 84.0 | 12.0 | 4 | 2.00 | 35 | 20 |
| 12/3 | 12.0 | 9.2 | 12.0 | 38.0 | 84.0 | 12.0 | 4 | 3.00 | 35 | 20 |
| 16/1 | 16.0 | 15.0 | 16.0 | 44.0 | 93.0 | 16.0 | 4 | 1.00 | 35 | 20 |
| 16/2 | 16.0 | 15.0 | 16.0 | 44.0 | 93.0 | 16.0 | 4 | 2.00 | 35 | 20 |
| 16/3 | 16.0 | 15.0 | 16.0 | 44.0 | 93.0 | 16.0 | 4 | 3.00 | 35 | 20 |
| 20/1 | 20.0 | 18.5 | 20.0 | 55.0 | 104.0 | 20.0 | 4 | 1.00 | 35 | 20 |
| 20/2,5 | 20.0 | 18.5 | 20.0 | 55.0 | 104.0 | 20.0 | 4 | 2.50 | 35 | 20 |

| Dimension | Ø1 | | Ø2 | | Ø3 | | Ø4 | | Ø5 | | Ø6 | |
|--------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Infeed in mm | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD |
| | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD |
| Application | | | | | | | | | | | | |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|-----------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | | | |
| 1.1 | 46-55 | 130 | 0.015 | 0.017 | 0.02 | 0.025 | 0.025 | 0.03 | 0.03 | 0.035 | 0.035 | 0.04 | 0.04 | 0.045 |
| 1.2 | 56-60 | 100 | 0.012 | 0.014 | 0.018 | 0.022 | 0.022 | 0.028 | 0.028 | 0.032 | 0.032 | 0.038 | 0.038 | 0.042 |
| 1.3 | 60-65 | 85 | 0.01 | 0.012 | 0.015 | 0.02 | 0.02 | 0.025 | 0.025 | 0.03 | 0.03 | 0.035 | 0.035 | 0.04 |
| 1.4 | 66-70 | 70 | 0.007 | 0.009 | 0.012 | 0.017 | 0.015 | 0.02 | 0.02 | 0.025 | 0.025 | 0.03 | 0.03 | 0.035 |


| Dimension | Ø8 | | Ø10 | | Ø12 | | Ø16 | | Ø20 | |
|--------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Infeed in mm | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD |
| | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD |
| Application | | | | | | | | | | |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|-----------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | |
| 1.1 | 46-55 | 130 | 0.045 | 0.05 | 0.05 | 0.055 | 0.055 | 0.07 | 0.07 | 0.075 | 0.08 | 0.085 |
| 1.2 | 56-60 | 100 | 0.042 | 0.048 | 0.047 | 0.053 | 0.052 | 0.065 | 0.065 | 0.07 | 0.075 | 0.08 |
| 1.3 | 60-65 | 85 | 0.04 | 0.045 | 0.045 | 0.05 | 0.05 | 0.06 | 0.06 | 0.065 | 0.07 | 0.075 |
| 1.4 | 66-70 | 70 | 0.03 | 0.035 | 0.035 | 0.045 | 0.04 | 0.055 | 0.05 | 0.06 | 0.06 | 0.07 |



Note | by using multipass milling the maximum infeed (ae, ap) is 0.5x corner radius!

| | |
|-----------|----------------|
| Cooling | |
| Tolerance | e8 |
| Coating | AlphaDura Navy |

| | | | |
|-------------|-----|-----|--|
| Strategy | HSC | HPC | |
| Application | | | |
| Features | HA | ≠ | |



- Ultrafine carbide grade specially developed for machining hardened steels
 - Adapted rake angle for safe milling up to 70 HRC
 - Defined cutting edge preparation for homogeneous wear
-
- Long version for deeper cavities
 - Multipass milling of 3D contours
-
- Radius tolerance $r \leq 1.5 \text{ mm}$: $\pm 0.003 \text{ mm}$
 - Radius tolerance $r > 1.5 \text{ mm}$: $\pm 0.005 \text{ mm}$

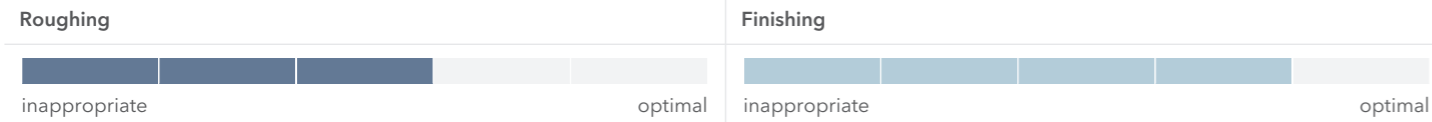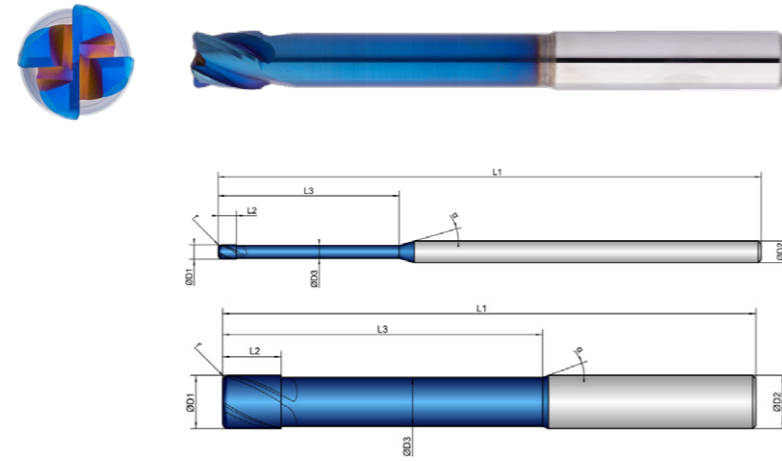

| K202233 | D1 mm \varnothing | D3 mm \varnothing | L2 mm | L3 mm | L1 mm | D2 mm \varnothing | z # | r mm | | α ° |
|---------|---------------------------|---------------------------|----------|----------|----------|---------------------------|--------|---------|----|---------------|
| 1/0,1 | 1.0 | 0.85 | 1.5 | 20.0 | 75.0 | 3.0 | 4 | 0.10 | 35 | 20 |
| 1/0,2 | 1.0 | 0.85 | 1.5 | 20.0 | 75.0 | 3.0 | 4 | 0.20 | 35 | 20 |
| 2/0,2 | 2.0 | 1.8 | 2.5 | 25.0 | 75.0 | 3.0 | 4 | 0.20 | 35 | 20 |
| 2/0,3 | 2.0 | 1.8 | 2.5 | 25.0 | 75.0 | 3.0 | 4 | 0.30 | 35 | 20 |
| 2/0,5 | 2.0 | 1.8 | 2.5 | 25.0 | 75.0 | 3.0 | 4 | 0.50 | 35 | 20 |
| 3/0,25 | 3.0 | 2.7 | 4.0 | 32.0 | 75.0 | 3.0 | 4 | 0.25 | 35 | 20 |
| 3/0,3 | 3.0 | 2.7 | 4.0 | 32.0 | 75.0 | 3.0 | 4 | 0.30 | 35 | 20 |
| 3/0,5 | 3.0 | 2.7 | 4.0 | 32.0 | 75.0 | 3.0 | 4 | 0.50 | 35 | 20 |
| 3/1 | 3.0 | 2.7 | 4.0 | 32.0 | 75.0 | 3.0 | 4 | 1.00 | 35 | 20 |
| 4/0,2 | 4.0 | 3.7 | 5.0 | 36.0 | 75.0 | 4.0 | 4 | 0.20 | 35 | 20 |
| 4/0,25 | 4.0 | 3.7 | 5.0 | 36.0 | 75.0 | 4.0 | 4 | 0.25 | 35 | 20 |
| 4/0,4 | 4.0 | 3.7 | 5.0 | 36.0 | 75.0 | 4.0 | 4 | 0.40 | 35 | 20 |
| 4/0,5 | 4.0 | 3.7 | 5.0 | 36.0 | 75.0 | 4.0 | 4 | 0.50 | 35 | 20 |
| 4/1 | 4.0 | 3.7 | 5.0 | 36.0 | 75.0 | 4.0 | 4 | 1.00 | 35 | 20 |
| 5/0,25 | 5.0 | 4.6 | 6.0 | 40.0 | 75.0 | 5.0 | 4 | 0.25 | 35 | 20 |
| 5/0,5 | 5.0 | 4.6 | 6.0 | 40.0 | 75.0 | 5.0 | 4 | 0.50 | 35 | 20 |

| K202233 | D1 mm \varnothing | D3 mm \varnothing | L2 mm | L3 mm | L1 mm | D2 mm \varnothing | z # | r mm | | α ° |
|---------|---------------------------|---------------------------|----------|----------|----------|---------------------------|--------|---------|----|---------------|
| 5/1 | 5.0 | 4.6 | 6.0 | 40.0 | 75.0 | 5.0 | 4 | 1.00 | 35 | 20 |
| 6/0,25 | 6.0 | 5.5 | 7.0 | 44.0 | 80.0 | 6.0 | 4 | 0.25 | 35 | 20 |
| 6/0,5 | 6.0 | 5.5 | 7.0 | 44.0 | 80.0 | 6.0 | 4 | 0.50 | 35 | 20 |
| 6/1 | 6.0 | 5.5 | 7.0 | 44.0 | 80.0 | 6.0 | 4 | 1.00 | 35 | 20 |
| 6/1,5 | 6.0 | 5.5 | 7.0 | 44.0 | 80.0 | 6.0 | 4 | 1.50 | 35 | 20 |
| 8/0,25 | 8.0 | 7.4 | 9.0 | 54.0 | 100.0 | 8.0 | 4 | 0.25 | 35 | 20 |
| 8/0,5 | 8.0 | 7.4 | 9.0 | 54.0 | 100.0 | 8.0 | 4 | 0.50 | 35 | 20 |
| 8/0,8 | 8.0 | 7.4 | 9.0 | 54.0 | 100.0 | 8.0 | 4 | 0.80 | 35 | 20 |
| 8/1 | 8.0 | 7.4 | 9.0 | 54.0 | 100.0 | 8.0 | 4 | 1.00 | 35 | 20 |
| 8/1,5 | 8.0 | 7.4 | 9.0 | 54.0 | 100.0 | 8.0 | 4 | 1.50 | 35 | 20 |
| 8/2 | 8.0 | 7.4 | 9.0 | 54.0 | 100.0 | 8.0 | 4 | 2.00 | 35 | 20 |
| 8/3 | 8.0 | 7.4 | 9.0 | 54.0 | 100.0 | 8.0 | 4 | 3.00 | 35 | 20 |
| 10/0,25 | 10.0 | 9.2 | 11.0 | 60.0 | 100.0 | 10.0 | 4 | 0.25 | 35 | 20 |
| 10/0,5 | 10.0 | 9.2 | 11.0 | 60.0 | 100.0 | 10.0 | 4 | 0.50 | 35 | 20 |
| 10/0,8 | 10.0 | 9.2 | 11.0 | 60.0 | 100.0 | 10.0 | 4 | 0.80 | 35 | 20 |
| 10/1 | 10.0 | 9.2 | 11.0 | 60.0 | 100.0 | 10.0 | 4 | 1.00 | 35 | 20 |
| 10/1,5 | 10.0 | 9.2 | 11.0 | 60.0 | 100.0 | 10.0 | 4 | 1.50 | 35 | 20 |
| 10/2 | 10.0 | 9.2 | 11.0 | 60.0 | 100.0 | 10.0 | 4 | 2.00 | 35 | 20 |
| 10/3 | 10.0 | 9.2 | 11.0 | 60.0 | 100.0 | 10.0 | 4 | 3.00 | 35 | 20 |
| 12/0,5 | 12.0 | 11.0 | 12.0 | 75.0 | 120.0 | 12.0 | 4 | 0.50 | 35 | 20 |
| 12/1 | 12.0 | 11.0 | 12.0 | 75.0 | 120.0 | 12.0 | 4 | 1.00 | 35 | 20 |
| 12/1,5 | 12.0 | 11.0 | 12.0 | 75.0 | 120.0 | 12.0 | 4 | 1.50 | 35 | 20 |
| 12/2 | 12.0 | 11.0 | 12.0 | 75.0 | 120.0 | 12.0 | 4 | 2.00 | 35 | 20 |
| 12/3 | 12.0 | 11.0 | 12.0 | 75.0 | 120.0 | 12.0 | 4 | 3.00 | 35 | 20 |
| 16/1 | 16.0 | 15.0 | 16.0 | 92.0 | 150.0 | 16.0 | 4 | 1.00 | 35 | 20 |
| 16/2 | 16.0 | 15.0 | 16.0 | 92.0 | 150.0 | 16.0 | 4 | 2.00 | 35 | 20 |
| 16/3 | 16.0 | 15.0 | 16.0 | 92.0 | 150.0 | 16.0 | 4 | 3.00 | 35 | 20 |
| 20/1 | 20.0 | 18.5 | 20.0 | 92.0 | 150.0 | 20.0 | 4 | 1.00 | 35 | 20 |
| 20/2,5 | 20.0 | 18.5 | 20.0 | 92.0 | 150.0 | 20.0 | 4 | 2.50 | 35 | 20 |

| Dimension | Ø1 | | Ø2 | | Ø3 | | Ø4 | | Ø5 | | Ø6 | |
|--------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Infeed in mm | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD |
| | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD |
| Application | | | | | | | | | | | | |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|-----------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | | | |
| 1.1 | 46-55 | 105 | 0.015 | 0.017 | 0.02 | 0.025 | 0.025 | 0.03 | 0.03 | 0.035 | 0.035 | 0.04 | 0.04 | 0.045 |
| 1.2 | 56-60 | 80 | 0.012 | 0.014 | 0.018 | 0.022 | 0.022 | 0.028 | 0.028 | 0.032 | 0.032 | 0.038 | 0.038 | 0.042 |
| 1.3 | 60-65 | 70 | 0.01 | 0.012 | 0.015 | 0.02 | 0.02 | 0.025 | 0.025 | 0.03 | 0.03 | 0.035 | 0.035 | 0.04 |
| 1.4 | 66-70 | 60 | 0.007 | 0.009 | 0.012 | 0.017 | 0.015 | 0.02 | 0.02 | 0.025 | 0.025 | 0.03 | 0.03 | 0.035 |

| Dimension | Ø8 | | Ø10 | | Ø12 | | Ø16 | | Ø20 | |
|--------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Infeed in mm | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD |
| | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD |
| Application | | | | | | | | | | |


| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|-----------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | |
| 1.1 | 46-55 | 105 | 0.045 | 0.05 | 0.05 | 0.055 | 0.055 | 0.07 | 0.07 | 0.075 | 0.08 | 0.085 |
| 1.2 | 56-60 | 80 | 0.042 | 0.048 | 0.047 | 0.053 | 0.052 | 0.065 | 0.065 | 0.07 | 0.075 | 0.08 |
| 1.3 | 60-65 | 70 | 0.04 | 0.045 | 0.045 | 0.05 | 0.05 | 0.06 | 0.06 | 0.065 | 0.07 | 0.075 |
| 1.4 | 66-70 | 60 | 0.03 | 0.035 | 0.035 | 0.045 | 0.04 | 0.055 | 0.05 | 0.06 | 0.06 | 0.07 |

Note | by using multipass milling the maximum infeed (ae, ap) is 0.5x corner radius!

| | |
|-----------|----------------|
| Cooling | |
| Tolerance | e8 |
| Coating | AlphaDura Navy |

| | | |
|-------------|------------|--|
| Strategy | HPC | |
| Application | | |
| Features | HA | |

- Ultrafine carbide grade specially developed for machining hardened steels
- Adapted rake angle for safe milling up to 70 HRC
- Defined cutting edge preparation for homogeneous wear

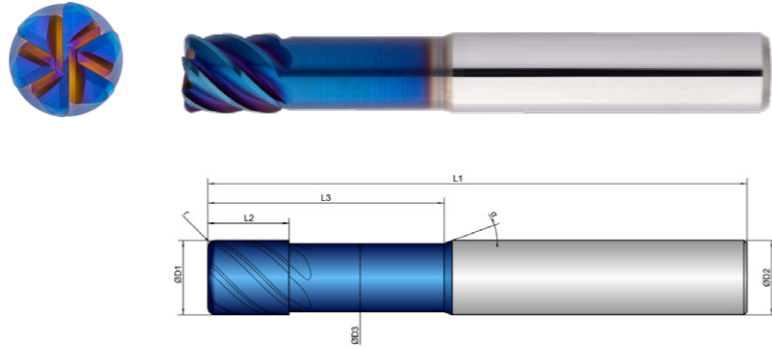

- Multipass milling of 3D contours

- Radius tolerance $r \leq 1.5 \text{ mm}$: $\pm 0.003 \text{ mm}$
- Radius tolerance $r > 1.5 \text{ mm}$: $\pm 0.005 \text{ mm}$

Roughing



Finishing



| K202253 | D1 mm \varnothing | D3 mm \varnothing | L2 mm | L3 mm | L1 mm | D2 mm \varnothing | z # | r mm | α ° |
|---------|---------------------------|---------------------------|----------|----------|----------|---------------------------|--------|---------|---------------|
| 3/0,3 | 3.0 | 2.7 | 4.0 | 14.0 | 50.0 | 3.0 | 4 | 0.30 | 45 |
| 3/0,5 | 3.0 | 2.7 | 4.0 | 14.0 | 50.0 | 3.0 | 4 | 0.50 | 45 |
| 3/1 | 3.0 | 2.7 | 4.0 | 14.0 | 50.0 | 3.0 | 4 | 1.00 | 45 |
| 4/0,4 | 4.0 | 3.7 | 5.0 | 16.0 | 50.0 | 4.0 | 4 | 0.40 | 45 |
| 4/0,5 | 4.0 | 3.7 | 5.0 | 16.0 | 50.0 | 4.0 | 4 | 0.50 | 45 |
| 4/1 | 4.0 | 3.7 | 5.0 | 16.0 | 50.0 | 4.0 | 4 | 1.00 | 45 |
| 5/0,5 | 5.0 | 4.6 | 6.0 | 18.0 | 54.0 | 5.0 | 4 | 0.50 | 45 |
| 5/1 | 5.0 | 4.6 | 6.0 | 18.0 | 54.0 | 5.0 | 4 | 1.00 | 45 |
| 6/0,5 | 6.0 | 5.5 | 7.0 | 21.0 | 58.0 | 6.0 | 6 | 0.50 | 45 |
| 6/0,8 | 6.0 | 5.5 | 7.0 | 21.0 | 58.0 | 6.0 | 6 | 0.80 | 45 |
| 6/1 | 6.0 | 5.5 | 7.0 | 21.0 | 58.0 | 6.0 | 6 | 1.00 | 45 |
| 6/1,5 | 6.0 | 5.5 | 7.0 | 21.0 | 58.0 | 6.0 | 6 | 1.50 | 45 |
| 8/0,5 | 8.0 | 7.4 | 9.0 | 27.0 | 64.0 | 8.0 | 6 | 0.50 | 45 |

| K202253 | D1 mm \varnothing | D3 mm \varnothing | L2 mm | L3 mm | L1 mm | D2 mm \varnothing | z # | r mm | α ° |
|---------|---------------------------|---------------------------|----------|----------|----------|---------------------------|--------|---------|---------------|
| 8/0,8 | 8.0 | 7.4 | 9.0 | 27.0 | 64.0 | 8.0 | 6 | 0.80 | 45 |
| 8/1 | 8.0 | 7.4 | 9.0 | 27.0 | 64.0 | 8.0 | 6 | 1.00 | 45 |
| 8/1,5 | 8.0 | 7.4 | 9.0 | 27.0 | 64.0 | 8.0 | 6 | 1.50 | 45 |
| 8/2 | 8.0 | 7.4 | 9.0 | 27.0 | 64.0 | 8.0 | 6 | 2.00 | 45 |
| 8/3 | 8.0 | 7.4 | 9.0 | 27.0 | 64.0 | 8.0 | 6 | 3.00 | 45 |
| 10/0,5 | 10.0 | 9.2 | 11.0 | 32.0 | 73.0 | 10.0 | 6 | 0.50 | 45 |
| 10/0,8 | 10.0 | 9.2 | 11.0 | 32.0 | 73.0 | 10.0 | 6 | 0.80 | 45 |
| 10/1 | 10.0 | 9.2 | 11.0 | 32.0 | 73.0 | 10.0 | 6 | 1.00 | 45 |
| 10/1,5 | 10.0 | 9.2 | 11.0 | 32.0 | 73.0 | 10.0 | 6 | 1.50 | 45 |
| 10/2 | 10.0 | 9.2 | 11.0 | 32.0 | 73.0 | 10.0 | 6 | 2.00 | 45 |
| 10/3 | 10.0 | 9.2 | 11.0 | 32.0 | 73.0 | 10.0 | 6 | 3.00 | 45 |
| 12/0,5 | 12.0 | 11.0 | 12.0 | 38.0 | 84.0 | 12.0 | 6 | 0.50 | 45 |
| 12/1 | 12.0 | 11.0 | 12.0 | 38.0 | 84.0 | 12.0 | 6 | 1.00 | 45 |
| 12/1,5 | 12.0 | 11.0 | 12.0 | 38.0 | 84.0 | 12.0 | 6 | 1.50 | 45 |
| 12/2 | 12.0 | 11.0 | 12.0 | 38.0 | 84.0 | 12.0 | 6 | 2.00 | 45 |
| 12/3 | 12.0 | 11.0 | 12.0 | 38.0 | 84.0 | 12.0 | 6 | 3.00 | 45 |
| 16/1 | 16.0 | 15.0 | 16.0 | 44.0 | 93.0 | 16.0 | 6 | 1.00 | 45 |
| 16/2 | 16.0 | 15.0 | 16.0 | 44.0 | 93.0 | 16.0 | 6 | 2.00 | 45 |
| 16/3 | 16.0 | 15.0 | 16.0 | 44.0 | 93.0 | 16.0 | 6 | 3.00 | 45 |
| 20/1 | 20.0 | 18.5 | 20.0 | 50.0 | 104.0 | 20.0 | 6 | 1.00 | 45 |
| 20/2,5 | 20.0 | 18.5 | 20.0 | 50.0 | 104.0 | 20.0 | 6 | 2.50 | 45 |

| Dimension | Ø 3 | | Ø 4 | | Ø 5 | | Ø 6 | | Ø 8 | | Ø 10 | |
|--------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Infeed in mm | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD |
| | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD |
| Application | | | | | | | | | | | | |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|-----------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | | | |
| 1.1 | 46-55 | 125 | 0.025 | 0.03 | 0.03 | 0.035 | 0.035 | 0.04 | 0.04 | 0.045 | 0.045 | 0.05 | 0.05 | 0.055 |
| 1.2 | 56-60 | 95 | 0.022 | 0.028 | 0.028 | 0.032 | 0.032 | 0.038 | 0.038 | 0.042 | 0.042 | 0.048 | 0.047 | 0.053 |
| 1.3 | 60-65 | 80 | 0.02 | 0.025 | 0.025 | 0.03 | 0.03 | 0.035 | 0.035 | 0.04 | 0.04 | 0.045 | 0.045 | 0.05 |
| 1.4 | 66-70 | 70 | 0.015 | 0.02 | 0.02 | 0.025 | 0.025 | 0.03 | 0.03 | 0.035 | 0.03 | 0.035 | 0.035 | 0.045 |

| Dimension | Ø 12 | | Ø 16 | | Ø 20 | |
|--------------|------------|------------|------------|------------|------------|------------|
| Infeed in mm | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD |
| | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD |
| Application | | | | | | |



| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz |
|----------|-----------------|-------------|-------|-------|-------|-------|-------|-------|
| H | HARDENED STEEL | Vc (m/min) | | | | | | |
| 1.1 | 46-55 | 125 | 0.055 | 0.07 | 0.07 | 0.075 | 0.08 | 0.085 |
| 1.2 | 56-60 | 95 | 0.052 | 0.065 | 0.065 | 0.07 | 0.075 | 0.08 |
| 1.3 | 60-65 | 80 | 0.05 | 0.06 | 0.06 | 0.065 | 0.07 | 0.075 |
| 1.4 | 66-70 | 70 | 0.04 | 0.055 | 0.05 | 0.06 | 0.06 | 0.07 |

Note | by using multipass milling the maximum infeed (ae, ap) is 0.5x corner radius!

| | |
|-----------|----------------|
| Cooling | |
| Tolerance | e8 |
| Coating | AlphaDura Navy |

| | | |
|-------------|---------|--|
| Strategy | ETC HPC | |
| Application | | |
| Features | HA | |

- Ultrafine carbide grade specially developed for machining hardened steels
 - Adapted rake angle for safe milling up to 70 HRC
 - Defined cutting edge preparation for homogeneous wear
-
- Multipass milling of 3D contours
-
- Radius tolerance $r \leq 1.5$ mm: ± 0.003 mm
 - Radius tolerance $r > 1.5$ mm: ± 0.005 mm
 - Reduce the axial depth of cutting with increasing hardness

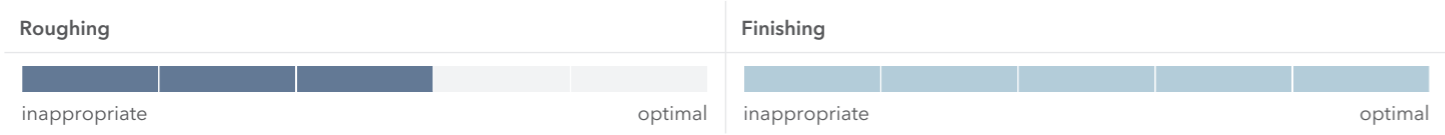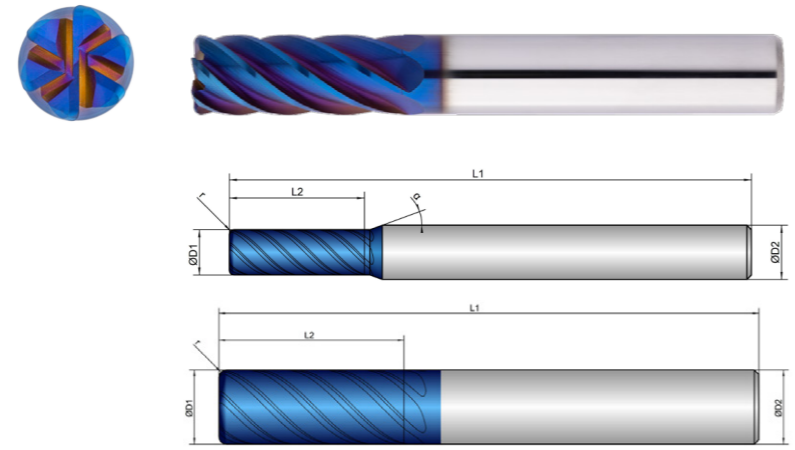

| | D1 | L2 | L1 | D2 | z | r | α |
|---------|---------------------|------|-------|---------------------|----|------|------------|
| K202293 | mm \varnothing | mm | mm | mm \varnothing | # | mm | $^{\circ}$ |
| 5/0,5 | 5.0 | 15.0 | 58.0 | 6.0 | 6 | 0.50 | 12 |
| 5/1 | 5.0 | 15.0 | 58.0 | 6.0 | 6 | 1.00 | 12 |
| 6/0,5 | 6.0 | 16.0 | 58.0 | 6.0 | 6 | 0.50 | 37.5 |
| 6/1 | 6.0 | 16.0 | 58.0 | 6.0 | 6 | 1.00 | 37.5 |
| 8/0,5 | 8.0 | 22.0 | 70.0 | 8.0 | 6 | 0.50 | 37.5 |
| 8/1 | 8.0 | 22.0 | 70.0 | 8.0 | 6 | 1.00 | 37.5 |
| 10/0,5 | 10.0 | 25.0 | 73.0 | 10.0 | 6 | 0.50 | 37.5 |
| 10/1 | 10.0 | 25.0 | 73.0 | 10.0 | 6 | 1.00 | 37.5 |
| 10/1,5 | 10.0 | 25.0 | 73.0 | 10.0 | 6 | 1.50 | 37.5 |
| 12/0,5 | 12.0 | 28.0 | 84.0 | 12.0 | 6 | 0.50 | 37.5 |
| 12/1 | 12.0 | 28.0 | 84.0 | 12.0 | 6 | 1.00 | 37.5 |
| 12/1,5 | 12.0 | 28.0 | 84.0 | 12.0 | 6 | 1.50 | 37.5 |
| 14/1 | 14.0 | 30.0 | 84.0 | 14.0 | 6 | 1.00 | 37.5 |
| 16/1 | 16.0 | 36.0 | 93.0 | 16.0 | 8 | 1.00 | 37.5 |
| 16/2 | 16.0 | 36.0 | 93.0 | 16.0 | 8 | 2.00 | 37.5 |
| 18/1 | 18.0 | 36.0 | 93.0 | 18.0 | 10 | 1.00 | 37.5 |
| 20/1 | 20.0 | 41.0 | 104.0 | 20.0 | 10 | 1.00 | 37.5 |
| 20/2 | 20.0 | 41.0 | 104.0 | 20.0 | 10 | 2.00 | 37.5 |

| Dimension | Ø5 | | Ø6 | | Ø8 | | Ø10 | | Ø12 | | Ø14 | |
|--------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Infeed in mm | ae=0.05xD | ae=0.04xD | ae=0.05xD | ae=0.04xD | ae=0.05xD | ae=0.04xD | ae=0.05xD | ae=0.04xD | ae=0.05xD | ae=0.04xD | ae=0.05xD | ae=0.04xD |
| Application | ap=L2 max | ap=0.04xD | ap=L2 max | ap=0.04xD | ap=L2 max | ap=0.04xD | ap=L2 max | ap=0.04xD | ap=L2 max | ap=0.04xD | ap=L2 max | ap=0.04xD |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|-----------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | | |
| 1.1 | 46-55 | 125 | 0.035 | 0.04 | 0.04 | 0.045 | 0.045 | 0.05 | 0.05 | 0.055 | 0.055 | 0.07 | 0.055 |
| 1.2 | 56-60 | 95 | 0.032 | 0.038 | 0.038 | 0.042 | 0.042 | 0.048 | 0.047 | 0.053 | 0.052 | 0.065 | 0.052 |
| 1.3 | 60-65 | 80 | 0.03 | 0.035 | 0.035 | 0.04 | 0.04 | 0.045 | 0.045 | 0.05 | 0.05 | 0.06 | 0.05 |
| 1.4 | 66-70 | 70 | 0.025 | 0.03 | 0.03 | 0.035 | 0.03 | 0.035 | 0.035 | 0.045 | 0.04 | 0.055 | 0.04 |

| Dimension | Ø16 | | Ø18 | | Ø20 | |
|--------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Infeed in mm | ae=0.05xD | ae=0.04xD | ae=0.05xD | ae=0.04xD | ae=0.05xD | ae=0.04xD |
| Application | ap=L2 max | ap=0.04xD | ap=L2 max | ap=0.04xD | ap=L2 max | ap=0.04xD |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz |
|----------|-----------------|-------------|-------|-------|-------|-------|-------|-------|
| H | HARDENED STEEL | Vc (m/min) | | | | | | |
| 1.1 | 46-55 | 125 | 0.07 | 0.075 | 0.07 | 0.075 | 0.08 | 0.085 |
| 1.2 | 56-60 | 95 | 0.065 | 0.07 | 0.065 | 0.07 | 0.075 | 0.08 |
| 1.3 | 60-65 | 80 | 0.06 | 0.065 | 0.06 | 0.065 | 0.07 | 0.075 |
| 1.4 | 66-70 | 70 | 0.05 | 0.06 | 0.05 | 0.06 | 0.06 | 0.07 |

Note | by using multipass milling the maximum infeed (ae, ap) is 0.5x corner radius!



STILL CAN'T FIND A SUITABLE MILLING CUTTER?

No problem - simply customize an existing tool. Using our configurator for special milling cutters, you can customize existing tools to your needs in an instant or create your own tools based on predefined types.




WE WILL RESPOND TO ALL REQUESTS SUBMITTED VIA THE CONFIGURATOR WITHIN ONE WORKING DAY AT THE LATEST

| | |
|-----------|----------------|
| Cooling | |
| Tolerance | e8 |
| Coating | AlphaDura Navy |

| | | |
|-------------|---------|--|
| Strategy | ETC HPC | |
| Application | | |
| Features | HA | |

- Ultrafine carbide grade specially developed for machining hardened steels
- Adapted rake angle for safe milling up to 70 HRC
- Defined cutting edge preparation for homogeneous wear

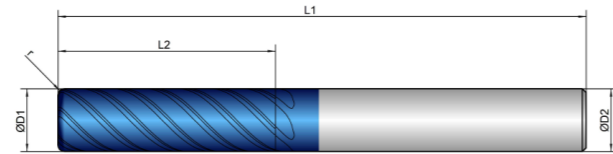

- Multipass milling of 3D contours

- Radius tolerance $r \leq 1.5$ mm: ± 0.003 mm
- Radius tolerance $r > 1.5$ mm: ± 0.005 mm
- Reduce the axial depth of cutting with increasing hardness

Roughing



Finishing



| | D1 | L2 | L1 | D2 | z | r | |
|---------|------|------|-------|------|----|------|------|
| K202303 | | | | | | | |
| | mm | mm | mm | mm | # | mm | ° |
| 6/0,5 | 6.0 | 21.0 | 65.0 | 6.0 | 6 | 0.50 | 37.5 |
| 6/1 | 6.0 | 21.0 | 65.0 | 6.0 | 6 | 1.00 | 37.5 |
| 8/0,5 | 8.0 | 28.0 | 75.0 | 8.0 | 6 | 0.50 | 37.5 |
| 8/1 | 8.0 | 28.0 | 75.0 | 8.0 | 6 | 1.00 | 37.5 |
| 10/0,5 | 10.0 | 35.0 | 85.0 | 10.0 | 6 | 0.50 | 37.5 |
| 10/1 | 10.0 | 35.0 | 85.0 | 10.0 | 6 | 1.00 | 37.5 |
| 10/1,5 | 10.0 | 35.0 | 85.0 | 10.0 | 6 | 1.50 | 37.5 |
| 12/0,5 | 12.0 | 45.0 | 100.0 | 12.0 | 6 | 0.50 | 37.5 |
| 12/1 | 12.0 | 45.0 | 100.0 | 12.0 | 6 | 1.00 | 37.5 |
| 12/1,5 | 12.0 | 45.0 | 100.0 | 12.0 | 6 | 1.50 | 37.5 |
| 14/1 | 14.0 | 45.0 | 100.0 | 14.0 | 6 | 1.00 | 37.5 |
| 16/1 | 16.0 | 50.0 | 110.0 | 16.0 | 8 | 1.00 | 37.5 |
| 16/2 | 16.0 | 50.0 | 110.0 | 16.0 | 8 | 2.00 | 37.5 |
| 18/1 | 18.0 | 54.0 | 114.0 | 18.0 | 10 | 1.00 | 37.5 |
| 20/1 | 20.0 | 55.0 | 126.0 | 20.0 | 10 | 1.00 | 37.5 |
| 20/2 | 20.0 | 55.0 | 126.0 | 20.0 | 10 | 2.00 | 37.5 |

| Dimension | Ø6 | | Ø8 | | Ø10 | | Ø12 | | Ø14 | | Ø16 | |
|--------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Infeed in mm | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD |
| Application | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD |

| Material | Hardness in HRC | Feed (mm/Z) | Vc (m/min) | | | | | | | | | | | |
|----------|-----------------|-------------|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| H | HARDENED STEEL | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 1.1 | 46-55 | 115 | 0.04 | 0.045 | 0.045 | 0.05 | 0.05 | 0.055 | 0.055 | 0.07 | 0.055 | 0.07 | 0.07 | 0.075 |
| 1.2 | 56-60 | 90 | 0.038 | 0.042 | 0.042 | 0.048 | 0.047 | 0.053 | 0.052 | 0.065 | 0.052 | 0.065 | 0.065 | 0.07 |
| 1.3 | 60-65 | 75 | 0.035 | 0.04 | 0.04 | 0.045 | 0.045 | 0.05 | 0.05 | 0.06 | 0.05 | 0.06 | 0.06 | 0.065 |
| 1.4 | 66-70 | 65 | 0.03 | 0.035 | 0.03 | 0.035 | 0.035 | 0.045 | 0.04 | 0.055 | 0.04 | 0.055 | 0.05 | 0.06 |

| Dimension | Ø18 | | Ø20 | |
|--------------|------------|------------|------------|------------|
| Infeed in mm | ae= 0.05xD | ae= 0.04xD | ae= 0.05xD | ae= 0.04xD |
| Application | ap= L2 max | ap= 0.04xD | ap= L2 max | ap= 0.04xD |

| Material | Hardness in HRC | Feed (mm/Z) | Vc (m/min) | | | |
|----------|-----------------|-------------|------------|-------|-------|-------|
| H | HARDENED STEEL | | fz | fz | fz | fz |
| 1.1 | 46-55 | 115 | 0.07 | 0.075 | 0.08 | 0.085 |
| 1.2 | 56-60 | 90 | 0.065 | 0.07 | 0.075 | 0.08 |
| 1.3 | 60-65 | 75 | 0.06 | 0.065 | 0.07 | 0.075 |
| 1.4 | 66-70 | 65 | 0.05 | 0.06 | 0.06 | 0.07 |


Note | by using multipass milling the maximum infeed (ae. ap) is 0.5x corner radius!



| | |
|-----------|----------------|
| Cooling | |
| Tolerance | e8 |
| Coating | AlphaDura Navy |

| | | |
|-------------|---------|--|
| Strategy | ETC HPC | |
| Application | | |
| Features | HA | |

- Ultrafine carbide grade specially developed for machining hardened steels
- Adapted rake angle for safe milling up to 70 HRC
- Defined cutting edge preparation for homogeneous wear

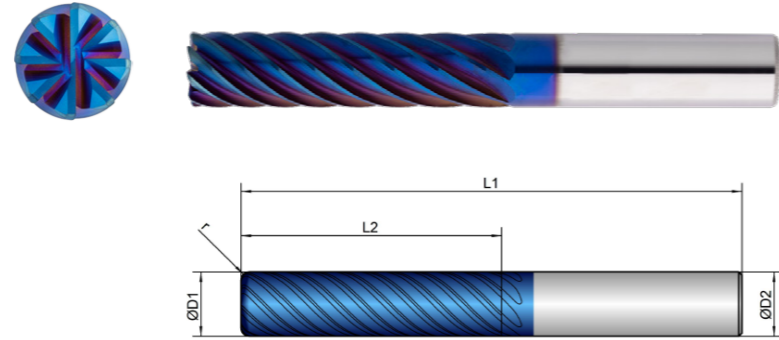

- Multipass milling of 3D contours

- Radius tolerance $r \leq 1.5$ mm: ± 0.003 mm
- Radius tolerance $r > 1.5$ mm: ± 0.005 mm
- Reduce the axial depth of cutting with increasing hardness

Roughing



Finishing



| | D1 mm ø | L2 mm | L1 mm | D2 mm ø | z # | r mm | |
|---------|-------------------|--------------|--------------|-------------------|------------|-------------|------|
| K202307 | | | | | | | |
| 16/1 | 16.0 | 65.0 | 125.0 | 16.0 | 8 | 1.00 | 37.5 |
| 16/2 | 16.0 | 65.0 | 125.0 | 16.0 | 8 | 2.00 | 37.5 |
| 20/1 | 20.0 | 70.0 | 135.0 | 20.0 | 10 | 1.00 | 37.5 |
| 20/2 | 20.0 | 70.0 | 135.0 | 20.0 | 10 | 2.00 | 37.5 |

| Dimension | Ø16 | | Ø20 | |
|--------------|------------|------------|------------|------------|
| Infeed in mm | ae= 0.03xD | ae= 0.03xD | ae= 0.03xD | ae= 0.03xD |
| | ap= L2 max | ap= 0.03xD | ap= L2 max | ap= 0.03xD |
| Application | | | | |



| H | Material | Hardness in HRC | Feed (mm/Z) | Vc (m/min) | | | |
|-----|----------------|-----------------|-------------|------------|-------|-------|-------|
| | | | | fz | fz | fz | fz |
| 1.1 | HARDENED STEEL | 46-55 | 105 | 0.06 | 0.065 | 0.07 | 0.075 |
| 1.2 | | 56-60 | 80 | 0.055 | 0.06 | 0.065 | 0.07 |
| 1.3 | | 60-65 | 65 | 0.055 | 0.06 | 0.065 | 0.07 |
| 1.4 | | 66-70 | 55 | 0.05 | 0.055 | 0.06 | 0.065 |

Note | by using multipass milling the maximum infeed (ae, ap) is 0.5x corner radius!

| | |
|-----------|----------------|
| Cooling | |
| Tolerance | h9 |
| Coating | AlphaDura Navy |

| | | |
|-------------|------------|--|
| Strategy | HSC | |
| Application | | |
| Features | HA | |

- Ultrafine carbide grade specially developed for machining hardened steels
 - Geometry with tangential transitions for HSC milling
 - Defined cutting edge preparation for homogeneous wear
-
- For roughing and finishing under HSC conditions
-
- Check programming radius and ap max. according to the variant table

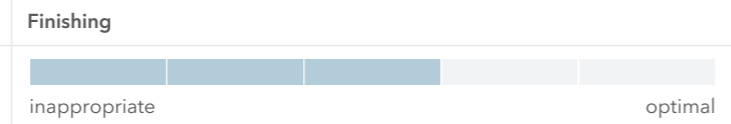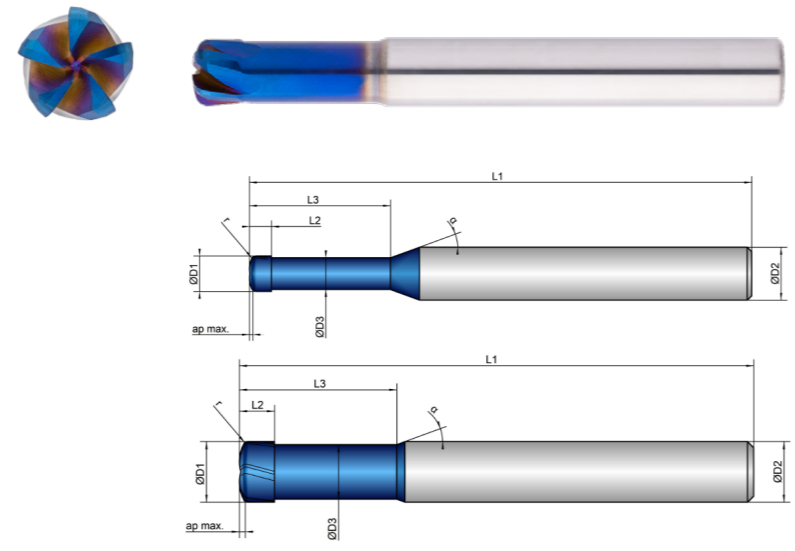

| K207013 | D1 | D3 | L2 | L3 | L1 | D2 | z | | | | | | |
|---------|---------|---------|-----|------|-------|---------|---|-----|-----------|----|----|--|---|
| | mm ø | mm ø | mm | mm | mm | mm ø | # | mm | mm max | ° | ° | | ° |
| 2 | 2.0 | 1.7 | 1.5 | 13.0 | 54.0 | 6.0 | 2 | 0.3 | 0.06 | 12 | 20 | | |
| 3 | 3.0 | 2.7 | 1.5 | 15.0 | 54.0 | 6.0 | 2 | 0.3 | 0.10 | 12 | 20 | | |
| 4 | 4.0 | 3.6 | 2.5 | 16.0 | 57.0 | 6.0 | 2 | 0.5 | 0.15 | 12 | 20 | | |
| 5 | 5.0 | 4.6 | 3.5 | 18.0 | 65.0 | 6.0 | 4 | 0.5 | 0.17 | 12 | 20 | | |
| 6 | 6.0 | 5.2 | 3.5 | 20.0 | 65.0 | 6.0 | 4 | 1.0 | 0.20 | 12 | 20 | | |
| 8 | 8.0 | 7.0 | 4.8 | 24.0 | 70.0 | 8.0 | 5 | 1.5 | 0.25 | 12 | 20 | | |
| 10 | 10.0 | 9.0 | 5.8 | 26.0 | 85.0 | 10.0 | 5 | 2.0 | 0.30 | 12 | 20 | | |
| 12 | 12.0 | 11.0 | 6.8 | 30.0 | 93.0 | 12.0 | 5 | 2.0 | 0.40 | 12 | 20 | | |
| 16 | 16.0 | 14.5 | 8.8 | 35.0 | 100.0 | 16.0 | 5 | 2.5 | 0.50 | 12 | 20 | | |

| Dimension | Ø2 | Ø3 | Ø4 | Ø5 | Ø6 | Ø8 | Ø10 | Ø12 | Ø16 |
|--------------|----------------------------|---------------------------|----------------------------|----------------------------|---------------------------|----------------------------|---------------------------|---------------------------|---------------------------|
| Infeed in mm | ae= 1xD ap_max = 0.06mm | ae= 1xD ap_max = 0.1mm | ae= 1xD ap_max = 0.15mm | ae= 1xD ap_max = 0.17mm | ae= 1xD ap_max = 0.2mm | ae= 1xD ap_max = 0.25mm | ae= 1xD ap_max = 0.3mm | ae= 1xD ap_max = 0.4mm | ae= 1xD ap_max = 0.5mm |
| Application | | | | | | | | | |



| H | Material | Hardness in HRC | Feed (mm/Z) | Vc (m/min) | | | | | | | | | |
|-----|----------------|-----------------|-------------|------------|-------|-------|-------|-------|------|------|------|------|----|
| | | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 1.1 | HARDENED STEEL | 46-55 | 160 | 0.028 | 0.05 | 0.07 | 0.08 | 0.09 | 0.11 | 0.13 | 0.16 | 0.22 | |
| 1.2 | | 56-60 | 120 | 0.025 | 0.045 | 0.065 | 0.075 | 0.085 | 0.1 | 0.12 | 0.15 | 0.2 | |
| 1.3 | | 60-65 | 85 | 0.022 | 0.04 | 0.06 | 0.07 | 0.08 | 0.09 | 0.11 | 0.14 | 0.18 | |
| 1.4 | | 66-70 | 55 | 0.017 | 0.035 | 0.055 | 0.065 | 0.075 | 0.08 | 0.1 | 0.13 | 0.16 | |



| | |
|-----------|----------------|
| Cooling | |
| Tolerance | h9 |
| Coating | AlphaDura Navy |

| | | |
|-------------|------------|--|
| Strategy | HSC | |
| Application | | |
| Features | HA | |

- Ultrafine carbide grade specially developed for machining hardened steels
 - Geometry with tangential transitions for HSC milling
 - Defined cutting edge preparation for homogeneous wear
-
- Long version for deeper cavities
 - For roughing and finishing under HSC conditions
-
- Check programming radius and ap max. according to the variant table

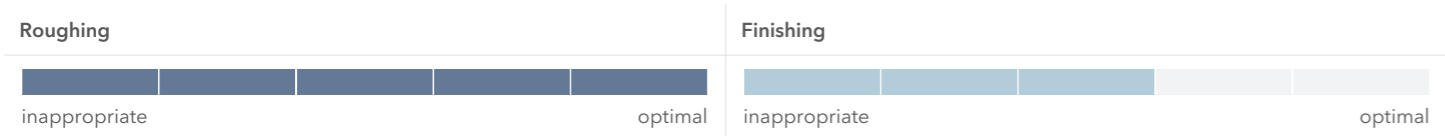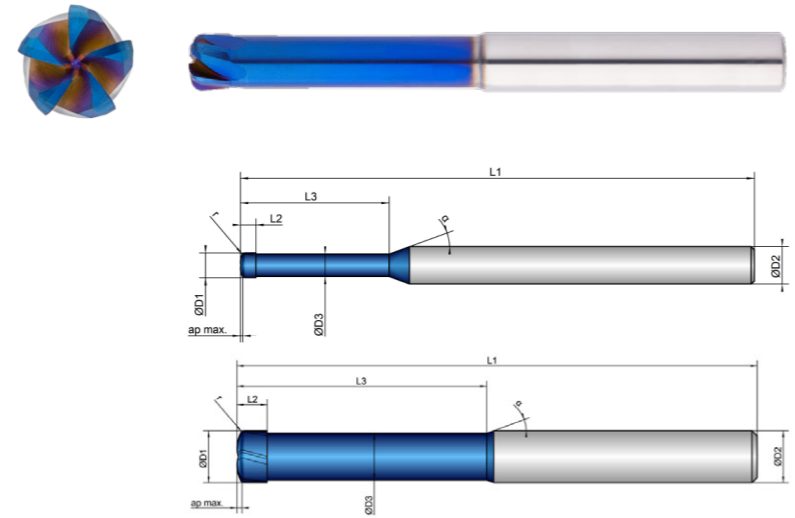

| | D1 | D3 | L2 | L3 | L1 | D2 | z | | | | α |
|---------|------------------|------------------|-----|------|-------|------------------|---|-----|--------|----|----------|
| K207018 | mm \varnothing | mm \varnothing | mm | mm | mm | mm \varnothing | # | mm | mm max | ° | ° |
| 2 | 2.0 | 1.7 | 1.5 | 18.0 | 75.0 | 6.0 | 2 | 0.3 | 0.06 | 12 | 20 |
| 3 | 3.0 | 2.7 | 1.5 | 20.0 | 75.0 | 6.0 | 2 | 0.3 | 0.10 | 12 | 20 |
| 4 | 4.0 | 3.6 | 2.5 | 24.0 | 83.0 | 6.0 | 2 | 0.5 | 0.15 | 12 | 20 |
| 5 | 5.0 | 4.6 | 3.5 | 28.0 | 100.0 | 6.0 | 4 | 0.5 | 0.17 | 12 | 20 |
| 6 | 6.0 | 5.2 | 3.5 | 28.0 | 100.0 | 6.0 | 4 | 1.0 | 0.20 | 12 | 20 |
| 8 | 8.0 | 7.0 | 4.8 | 40.0 | 100.0 | 8.0 | 5 | 1.5 | 0.25 | 12 | 20 |
| 10 | 10.0 | 9.0 | 5.8 | 48.0 | 100.0 | 10.0 | 5 | 2.0 | 0.30 | 12 | 20 |
| 12 | 12.0 | 11.0 | 6.8 | 56.0 | 119.0 | 12.0 | 5 | 2.0 | 0.40 | 12 | 20 |
| 16 | 16.0 | 14.5 | 8.8 | 65.0 | 150.0 | 16.0 | 5 | 2.5 | 0.50 | 12 | 20 |

| Dimension | Ø2 | Ø3 | Ø4 | Ø5 | Ø6 | Ø8 | Ø10 | Ø12 | Ø16 |
|--------------|-------------------------------------|------------------------------------|-------------------------------------|-------------------------------------|------------------------------------|-------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| Infeed in mm | ae=1xD ap _{max} =0.06mm | ae=1xD ap _{max} =0.1mm | ae=1xD ap _{max} =0.15mm | ae=1xD ap _{max} =0.17mm | ae=1xD ap _{max} =0.2mm | ae=1xD ap _{max} =0.25mm | ae=1xD ap _{max} =0.3mm | ae=1xD ap _{max} =0.4mm | ae=1xD ap _{max} =0.5mm |
| Application | | | | | | | | | |


| H | Material | Hardness in HRC | Feed (mm/Z) | Vc (m/min) | | | | | | | | |
|-----|----------------|-----------------|-------------|------------|-------|-------|-------|-------|------|------|------|------|
| | | | | fz | fz | fz | fz | fz | fz | fz | fz | |
| 1.1 | HARDENED STEEL | 46-55 | 140 | 0.028 | 0.05 | 0.07 | 0.08 | 0.09 | 0.11 | 0.13 | 0.16 | 0.22 |
| 1.2 | | 56-60 | 100 | 0.025 | 0.045 | 0.065 | 0.075 | 0.085 | 0.1 | 0.12 | 0.15 | 0.2 |
| 1.3 | | 60-65 | 75 | 0.022 | 0.04 | 0.06 | 0.07 | 0.08 | 0.09 | 0.11 | 0.14 | 0.18 |
| 1.4 | | 66-70 | 45 | 0.017 | 0.035 | 0.055 | 0.065 | 0.075 | 0.08 | 0.1 | 0.13 | 0.16 |

| | |
|-----------|----------------|
| Cooling | |
| Tolerance | f8 |
| Coating | AlphaDura Navy |

| | | |
|-------------|-----------------------|--|
| Strategy | HSC HPC | |
| Application | | |
| Features | HA | |

- Ultrafine carbide grade specially developed for machining hardened steels
- Adapted rake angle for safe milling up to 70 HRC
- Defined cutting edge preparation for homogeneous wear

- Radius tolerance $r \leq 2$ mm: ± 0.003 mm
- Radius tolerance $r > 2$ mm: ± 0.005 mm

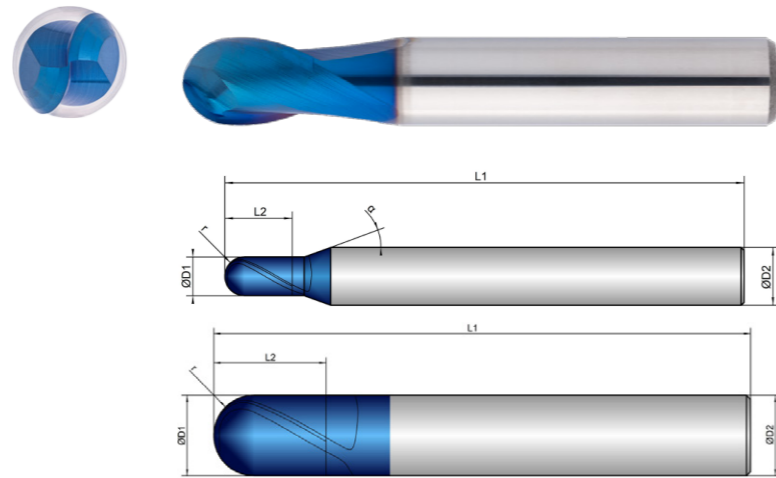

Roughing













Finishing













| K203103 | D1 mm ø | L2 mm | L1 mm | D2 mm ø | z # | r mm | | α ° |
|---------|---------------|----------|----------|---------------|--------|---------|----|---------------|
| 0,1/3 | 0.1 | 0.2 | 38.0 | 3.0 | 2 | 0.05 | 30 | 8 |
| 0,15/3 | 0.1 | 0.3 | 38.0 | 3.0 | 2 | 0.07 | 30 | 8 |
| 0,2/3 | 0.2 | 0.4 | 38.0 | 3.0 | 2 | 0.10 | 30 | 8 |
| 0,2/3 | 0.2 | 0.5 | 38.0 | 3.0 | 2 | 0.12 | 30 | 8 |
| 0,3/3 | 0.3 | 1.0 | 38.0 | 3.0 | 2 | 0.15 | 30 | 8 |
| 0,3/3 | 0.3 | 1.0 | 38.0 | 3.0 | 2 | 0.17 | 30 | 8 |
| 0,4/3 | 0.4 | 1.0 | 38.0 | 3.0 | 2 | 0.20 | 30 | 8 |
| 0,5/3 | 0.5 | 1.5 | 38.0 | 3.0 | 2 | 0.25 | 30 | 8 |
| 0,5/6 | 0.5 | 1.5 | 54.0 | 6.0 | 2 | 0.25 | 30 | 12 |
| 0,6/3 | 0.6 | 1.5 | 38.0 | 3.0 | 2 | 0.30 | 30 | 8 |
| 0,7/3 | 0.7 | 2.0 | 38.0 | 3.0 | 2 | 0.35 | 30 | 8 |
| 0,8/3 | 0.8 | 2.0 | 38.0 | 3.0 | 2 | 0.40 | 30 | 8 |







| K203103 | D1 mm ø | L2 mm | L1 mm | D2 mm ø | z # | r mm | | α ° |
|---------|---------------|----------|----------|---------------|--------|---------|----|---------------|
| 0,9/3 | 0.9 | 2.5 | 38.0 | 3.0 | 2 | 0.45 | 30 | 8 |
| 1/3 | 1.0 | 2.0 | 50.0 | 3.0 | 2 | 0.50 | 30 | 8 |
| 1/6 | 1.0 | 2.0 | 54.0 | 6.0 | 2 | 0.50 | 30 | 12 |
| 1,1/3 | 1.1 | 3.0 | 50.0 | 3.0 | 2 | 0.55 | 30 | 8 |
| 1,2/3 | 1.2 | 3.0 | 50.0 | 3.0 | 2 | 0.60 | 30 | 8 |
| 1,4/3 | 1.4 | 3.0 | 50.0 | 3.0 | 2 | 0.70 | 30 | 8 |
| 1,5/3 | 1.5 | 3.0 | 50.0 | 3.0 | 2 | 0.75 | 30 | 8 |
| 1,5/6 | 1.5 | 3.0 | 54.0 | 6.0 | 2 | 0.75 | 30 | 12 |
| 1,6/3 | 1.6 | 4.0 | 50.0 | 3.0 | 2 | 0.80 | 30 | 8 |
| 1,8/3 | 1.8 | 4.0 | 50.0 | 3.0 | 2 | 0.90 | 30 | 8 |
| 2/3 | 2.0 | 4.0 | 50.0 | 3.0 | 2 | 1.00 | 30 | 8 |
| 2/6 | 2.0 | 4.0 | 54.0 | 6.0 | 2 | 1.00 | 30 | 12 |
| 2,5/3 | 2.5 | 5.0 | 50.0 | 3.0 | 2 | 1.25 | 30 | 8 |
| 2,5/6 | 2.5 | 5.0 | 54.0 | 6.0 | 2 | 1.25 | 30 | 12 |
| 3/3 | 3.0 | 6.0 | 50.0 | 3.0 | 2 | 1.50 | 30 | |
| 3/6 | 3.0 | 6.0 | 54.0 | 6.0 | 2 | 1.50 | 30 | 12 |
| 4/4 | 4.0 | 7.0 | 54.0 | 4.0 | 2 | 2.00 | 30 | |
| 4/6 | 4.0 | 7.0 | 54.0 | 6.0 | 2 | 2.00 | 30 | 12 |
| 5/5 | 5.0 | 8.0 | 54.0 | 5.0 | 2 | 2.50 | 30 | |
| 5/6 | 5.0 | 8.0 | 54.0 | 6.0 | 2 | 2.50 | 30 | 12 |
| 6/6 | 6.0 | 10.0 | 54.0 | 6.0 | 2 | 3.00 | 30 | |
| 8/8 | 8.0 | 12.0 | 59.0 | 8.0 | 2 | 4.00 | 30 | |
| 10/10 | 10.0 | 14.0 | 67.0 | 10.0 | 2 | 5.00 | 30 | |
| 12/12 | 12.0 | 16.0 | 74.0 | 12.0 | 2 | 6.00 | 30 | |
| 14/14 | 14.0 | 18.0 | 75.0 | 14.0 | 2 | 7.00 | 30 | |
| 16/16 | 16.0 | 22.0 | 83.0 | 16.0 | 2 | 8.00 | 30 | |
| 20/20 | 20.0 | 26.0 | 93.0 | 20.0 | 2 | 10.00 | 30 | |

| Dimension | Ø0.1 | Ø0.15 | Ø0.2 | Ø0.25 | Ø0.3 | Ø0.35 | Ø0.4 | Ø0.5 | Ø0.6 | Ø0.7 |
|--------------|---|---|---|---|---|--|---|---|---|---|
| Infeed in mm | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD |
| Application |  |  |  |  |  |  |  |  |  |  |


| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|-----------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | |
| 1.1 | 46-55 | 110 | 0.014 | 0.014 | 0.017 | 0.017 | 0.018 | 0.018 | 0.019 | 0.024 | 0.024 | 0.024 |
| 1.2 | 56-60 | 70 | 0.012 | 0.012 | 0.016 | 0.016 | 0.017 | 0.017 | 0.018 | 0.023 | 0.023 | 0.023 |
| 1.3 | 60-65 | 50 | 0.01 | 0.01 | 0.014 | 0.014 | 0.015 | 0.015 | 0.017 | 0.022 | 0.022 | 0.022 |
| 1.4 | 66-70 | 40 | 0.008 | 0.008 | 0.012 | 0.012 | 0.013 | 0.013 | 0.014 | 0.019 | 0.019 | 0.019 |

| Dimension | Ø0.8 | Ø0.9 | Ø1 | Ø1.1 | Ø1.2 | Ø1.4 | Ø1.5 | Ø1.6 | Ø1.8 | Ø2 |
|--------------|---|---|---|---|---|--|---|---|---|---|
| Infeed in mm | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD |
| Application |  |  |  |  |  |  |  |  |  |  |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|-----------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | |
| 1.1 | 46-55 | 110 | 0.026 | 0.029 | 0.03 | 0.03 | 0.033 | 0.033 | 0.034 | 0.034 | 0.036 | 0.036 |
| 1.2 | 56-60 | 70 | 0.025 | 0.025 | 0.029 | 0.029 | 0.032 | 0.032 | 0.033 | 0.033 | 0.035 | 0.035 |
| 1.3 | 60-65 | 50 | 0.024 | 0.024 | 0.028 | 0.028 | 0.03 | 0.03 | 0.032 | 0.032 | 0.034 | 0.034 |
| 1.4 | 66-70 | 40 | 0.021 | 0.021 | 0.024 | 0.024 | 0.026 | 0.026 | 0.028 | 0.028 | 0.03 | 0.03 |

| Dimension | Ø2.5 | Ø3 | Ø4 | Ø5 | Ø6 | Ø8 | Ø10 | Ø12 | Ø14 | Ø16 |
|--------------|---|---|---|---|---|--|---|---|---|---|
| Infeed in mm | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD |
| Application |  |  |  |  |  |  |  |  |  |  |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|-----------------|-------------|-------|-------|-------|-------|-------|-------|------|------|------|------|
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | |
| 1.1 | 46-55 | 160 | 0.04 | 0.044 | 0.055 | 0.08 | 0.09 | 0.11 | 0.13 | 0.14 | 0.14 | 0.15 |
| 1.2 | 56-60 | 125 | 0.038 | 0.042 | 0.052 | 0.075 | 0.085 | 0.105 | 0.12 | 0.13 | 0.13 | 0.14 |
| 1.3 | 60-65 | 110 | 0.035 | 0.04 | 0.05 | 0.07 | 0.08 | 0.1 | 0.11 | 0.12 | 0.12 | 0.13 |
| 1.4 | 66-70 | 85 | 0.03 | 0.035 | 0.045 | 0.06 | 0.07 | 0.085 | 0.09 | 0.1 | 0.1 | 0.11 |

| Dimension | Ø20 |
|--------------|---|
| Infeed in mm | ae=0.05xD ap=0.05xD |
| Application |  |

| Material | Hardness in HRC | Feed (mm/Z) | fz |
|----------|-----------------|-------------|------|
| H | HARDENED STEEL | Vc (m/min) | |
| 1.1 | 46-55 | 160 | 0.18 |
| 1.2 | 56-60 | 125 | 0.17 |
| 1.3 | 60-65 | 110 | 0.15 |
| 1.4 | 66-70 | 85 | 0.13 |



| | |
|-----------|----------------|
| Cooling | |
| Tolerance | f8 |
| Coating | AlphaDura Navy |

| | | |
|-------------|-----------------------|--|
| Strategy | HSC HPC | |
| Application | | |
| Features | HA | |

- Ultrafine carbide grade specially developed for machining hardened steels
- Adapted rake angle for safe milling up to 70 HRC
- Defined cutting edge preparation for homogeneous wear





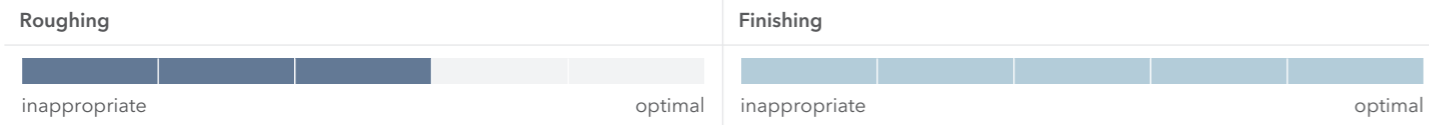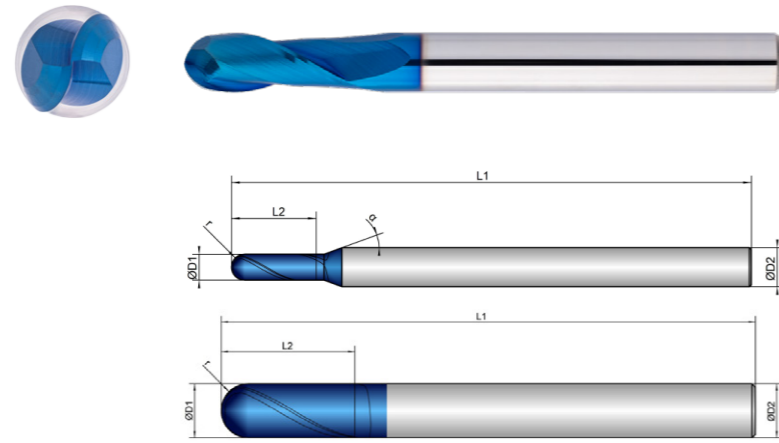





- Long version with extra long cutting length

- Radius tolerance $r \leq 2$ mm: ± 0.003 mm
- Radius tolerance $r > 2$ mm: ± 0.005 mm








| K203143 | D1 mm Ø | L2 mm | L1 mm | D2 mm Ø | z # | r mm | ° | α ° |
|---------|---------------|----------|----------|---------------|--------|---------|----|--------|
| 0,5/3 | 0.5 | 1.5 | 75.0 | 3.0 | 2 | 0.25 | 30 | 8 |
| 0,5/6 | 0.5 | 1.5 | 80.0 | 6.0 | 2 | 0.25 | 30 | 12 |
| 1/3 | 1.0 | 3.0 | 75.0 | 3.0 | 2 | 0.50 | 30 | 8 |
| 1/6 | 1.0 | 3.0 | 80.0 | 6.0 | 2 | 0.50 | 30 | 8 |
| 1,5/3 | 1.5 | 4.0 | 75.0 | 3.0 | 2 | 0.75 | 30 | 8 |
| 1,5/6 | 1.5 | 4.0 | 80.0 | 6.0 | 2 | 0.75 | 30 | 12 |
| 2/3 | 2.0 | 6.0 | 75.0 | 3.0 | 2 | 1.00 | 30 | 8 |
| 2/6 | 2.0 | 6.0 | 80.0 | 6.0 | 2 | 1.00 | 30 | 12 |
| 2,5/3 | 2.5 | 8.0 | 75.0 | 3.0 | 2 | 1.25 | 30 | 8 |
| 2,5/6 | 2.5 | 8.0 | 80.0 | 6.0 | 2 | 1.25 | 30 | 12 |
| 3/3 | 3.0 | 10.0 | 75.0 | 3.0 | 2 | 1.50 | 30 | |

| K203143 | D1 mm Ø | L2 mm | L1 mm | D2 mm Ø | z # | r mm | ° | α ° |
|---------|---------------|----------|----------|---------------|--------|---------|----|--------|
| 3/6 | 3.0 | 10.0 | 80.0 | 6.0 | 2 | 1.50 | 30 | 12 |
| 4/4 | 4.0 | 13.0 | 75.0 | 4.0 | 2 | 2.00 | 30 | |
| 4/6 | 4.0 | 13.0 | 80.0 | 6.0 | 2 | 2.00 | 30 | 12 |
| 5/5 | 5.0 | 14.0 | 75.0 | 5.0 | 2 | 2.50 | 30 | |
| 5/6 | 5.0 | 14.0 | 100.0 | 6.0 | 2 | 2.50 | 30 | 12 |
| 6/6 | 6.0 | 16.0 | 100.0 | 6.0 | 2 | 3.00 | 30 | |
| 8/8 | 8.0 | 22.0 | 100.0 | 8.0 | 2 | 4.00 | 30 | |
| 10/10 | 10.0 | 25.0 | 100.0 | 10.0 | 2 | 5.00 | 30 | |
| 12/12 | 12.0 | 26.0 | 100.0 | 12.0 | 2 | 6.00 | 30 | |
| 14/14 | 14.0 | 26.0 | 100.0 | 14.0 | 2 | 7.00 | 30 | |
| 16/16 | 16.0 | 30.0 | 150.0 | 16.0 | 2 | 8.00 | 30 | |
| 20/20 | 20.0 | 40.0 | 150.0 | 20.0 | 2 | 10.00 | 30 | |

| Dimension | Ø0.5 | Ø1 | Ø1.5 | Ø2 | Ø2.5 | Ø3 | Ø4 | Ø5 | Ø6 | Ø8 |
|--------------|---|---|---|---|---|--|---|---|---|---|
| Infeed in mm | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD |
| Application |  |  |  |  |  |  |  |  |  |  |


| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|-----------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | |
| 1.1 | 46-55 | 160 | 0.02 | 0.024 | 0.029 | 0.03 | 0.033 | 0.036 | 0.045 | 0.065 | 0.075 | 0.09 |
| 1.2 | 56-60 | 125 | 0.019 | 0.023 | 0.028 | 0.029 | 0.032 | 0.034 | 0.042 | 0.06 | 0.07 | 0.085 |
| 1.3 | 60-65 | 110 | 0.018 | 0.022 | 0.026 | 0.028 | 0.03 | 0.032 | 0.04 | 0.055 | 0.065 | 0.08 |
| 1.4 | 66-70 | 85 | 0.015 | 0.019 | 0.022 | 0.024 | 0.026 | 0.028 | 0.035 | 0.05 | 0.06 | 0.075 |

| Dimension | Ø10 | Ø12 | Ø14 | Ø16 | Ø20 |
|--------------|---|---|---|---|---|
| Infeed in mm | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD |
| Application |  |  |  |  |  |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz |
|----------|-----------------|-------------------|-------|------|------|-------|------|
| H | HARDENED STEEL | Vc (m/min) | | | | | |
| 1.1 | 46-55 | 160 | 0.1 | 0.12 | 0.12 | 0.125 | 0.15 |
| 1.2 | 56-60 | 125 | 0.095 | 0.11 | 0.11 | 0.115 | 0.14 |
| 1.3 | 60-65 | 110 | 0.09 | 0.1 | 0.1 | 0.105 | 0.12 |
| 1.4 | 66-70 | 85 | 0.085 | 0.09 | 0.09 | 0.1 | 0.11 |

| | |
|-----------|----------------|
| Cooling | |
| Tolerance | f8 |
| Coating | AlphaDura Navy |



| | | |
|-------------|-----|--|
| Strategy | HSC | |
| Application | | |
| Features | HA | |



- Ultrafine carbide grade specially developed for machining hardened steels
- Adapted rake angle for safe milling up to 70 HRC
- Defined cutting edge preparation for homogeneous wear

- Long version for deeper cavities

- Radius tolerance $r \leq 2$ mm: ± 0.003 mm
- Radius tolerance $r > 2$ mm: ± 0.005 mm

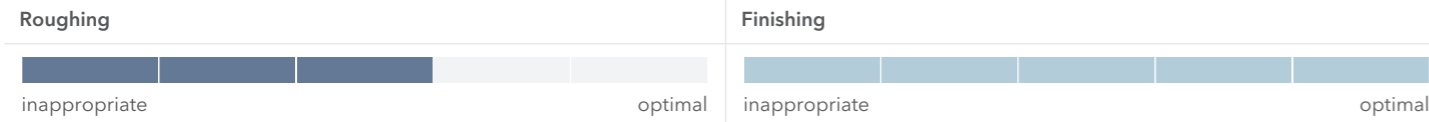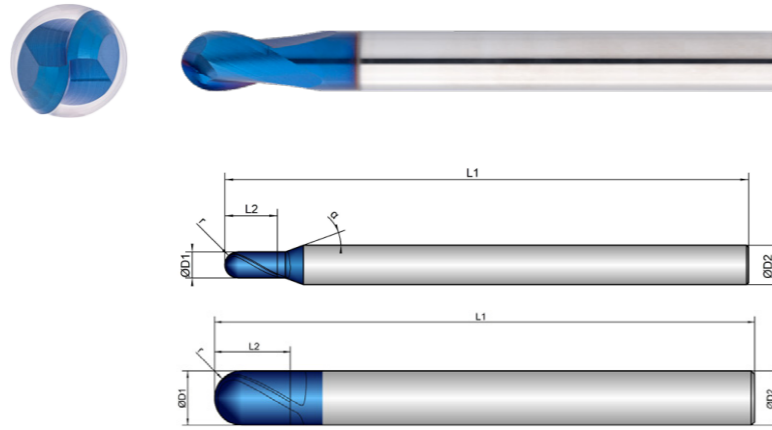

| K203153 | D1 mm ø | L2 mm | L1 mm | D2 mm ø | z # | r mm | | α ° |
|---------|---------------|----------|----------|---------------|--------|---------|----|---------------|
| 1/6 | 1.0 | 2.0 | 80.0 | 6.0 | 2 | 0.50 | 30 | 12 |
| 1,5/6 | 1.5 | 3.0 | 80.0 | 6.0 | 2 | 0.75 | 30 | 12 |
| 2/6 | 2.0 | 4.0 | 80.0 | 6.0 | 2 | 1.00 | 30 | 12 |
| 2,5/6 | 2.5 | 5.0 | 80.0 | 6.0 | 2 | 1.25 | 30 | 12 |
| 3/3 | 3.0 | 5.0 | 75.0 | 3.0 | 2 | 1.50 | 30 | |
| 3/6 | 3.0 | 5.0 | 80.0 | 6.0 | 2 | 1.50 | 30 | 12 |
| 4/4 | 4.0 | 8.0 | 75.0 | 4.0 | 2 | 2.00 | 30 | |
| 4/6 | 4.0 | 8.0 | 80.0 | 6.0 | 2 | 2.00 | 30 | 12 |
| 5/5 | 5.0 | 9.0 | 75.0 | 5.0 | 2 | 2.50 | 30 | |
| 5/6 | 5.0 | 9.0 | 100.0 | 6.0 | 2 | 2.50 | 30 | 12 |
| 6/6 | 6.0 | 10.0 | 100.0 | 6.0 | 2 | 3.00 | 30 | |
| 8/8 | 8.0 | 12.0 | 100.0 | 8.0 | 2 | 4.00 | 30 | |
| 10/10 | 10.0 | 14.0 | 100.0 | 10.0 | 2 | 5.00 | 30 | |
| 12/12 | 12.0 | 16.0 | 100.0 | 12.0 | 2 | 6.00 | 30 | |
| 14/14 | 14.0 | 18.0 | 100.0 | 14.0 | 2 | 7.00 | 30 | |
| 16/16 | 16.0 | 22.0 | 150.0 | 16.0 | 2 | 8.00 | 30 | |
| 20/20 | 20.0 | 26.0 | 150.0 | 20.0 | 2 | 10.00 | 30 | |

| Dimension | Ø1 | Ø1.5 | Ø2 | Ø2.5 | Ø3 | Ø4 | Ø5 | Ø6 | Ø8 | Ø10 |
|--------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Infeed in mm | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD |
| Application | | | | | | | | | | |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|-----------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | |
| 1.1 | 46-55 | 145 | 0.024 | 0.029 | 0.03 | 0.033 | 0.036 | 0.045 | 0.065 | 0.075 | 0.09 | 0.1 |
| 1.2 | 56-60 | 115 | 0.023 | 0.028 | 0.029 | 0.032 | 0.034 | 0.042 | 0.06 | 0.07 | 0.085 | 0.095 |
| 1.3 | 60-65 | 100 | 0.022 | 0.026 | 0.028 | 0.03 | 0.032 | 0.04 | 0.055 | 0.065 | 0.08 | 0.09 |
| 1.4 | 66-70 | 75 | 0.019 | 0.022 | 0.024 | 0.026 | 0.028 | 0.035 | 0.05 | 0.06 | 0.075 | 0.085 |

| Dimension | Ø12 | Ø14 | Ø16 | Ø20 |
|--------------|------------------------|------------------------|------------------------|------------------------|
| Infeed in mm | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD |
| Application | | | | |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz |
|----------|-----------------|-------------|------|------|-------|------|
| H | HARDENED STEEL | Vc (m/min) | | | | |
| 1.1 | 46-55 | 145 | 0.12 | 0.12 | 0.125 | 0.15 |
| 1.2 | 56-60 | 115 | 0.11 | 0.11 | 0.115 | 0.14 |
| 1.3 | 60-65 | 100 | 0.1 | 0.1 | 0.105 | 0.12 |
| 1.4 | 66-70 | 75 | 0.09 | 0.09 | 0.1 | 0.11 |

STILL CAN'T FIND A SUITABLE MILLING CUTTER?

No problem - simply customize an existing tool. Using our configurator for special milling cutters, you can customize existing tools to your needs in an instant or create your own tools based on predefined types.



WE WILL RESPOND TO ALL REQUESTS SUBMITTED VIA THE CONFIGURATOR WITHIN ONE WORKING DAY AT THE LATEST


| | |
|-----------|----------------|
| Cooling | |
| Tolerance | f8 |
| Coating | AlphaDura Navy |

| | |
|-------------|-----------------------|
| Strategy | HSC HPC |
| Application | |
| Features | HA |

- Ultrafine carbide grade specially developed for machining hardened steels
- Adapted rake angle for safe milling up to 70 HRC
- Defined cutting edge preparation for homogeneous wear



- 4 cutting edges to the center
- Radius tolerance $r \leq 2$ mm: ± 0.003 mm
- Radius tolerance $r > 2$ mm: ± 0.005 mm

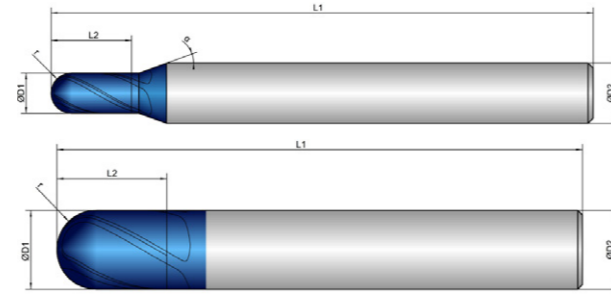

Roughing



Finishing



| | D1 | L2 | L1 | D2 | z | r | α |
|---------|------------------|------|------|------------------|---|-------|----------|
| K203333 | mm \varnothing | mm | mm | mm \varnothing | # | mm | ° |
| 2/3 | 2.0 | 4.0 | 50.0 | 3.0 | 4 | 1.00 | 8 |
| 2/6 | 2.0 | 4.0 | 54.0 | 6.0 | 4 | 1.00 | 12 |
| 2,5/6 | 2.5 | 5.0 | 54.0 | 6.0 | 4 | 1.25 | 12 |
| 3/3 | 3.0 | 5.0 | 50.0 | 3.0 | 4 | 1.50 | 30 |
| 3/6 | 3.0 | 5.0 | 54.0 | 6.0 | 4 | 1.50 | 12 |
| 4/4 | 4.0 | 8.0 | 54.0 | 4.0 | 4 | 2.00 | 30 |
| 4/6 | 4.0 | 8.0 | 54.0 | 6.0 | 4 | 2.00 | 12 |
| 5/5 | 5.0 | 9.0 | 54.0 | 5.0 | 4 | 2.50 | 30 |
| 5/6 | 5.0 | 9.0 | 54.0 | 6.0 | 4 | 2.50 | 12 |
| 6/6 | 6.0 | 10.0 | 54.0 | 6.0 | 4 | 3.00 | 30 |
| 7/8 | 7.0 | 12.0 | 59.0 | 8.0 | 4 | 3.50 | 30 |
| 8/8 | 8.0 | 12.0 | 59.0 | 8.0 | 4 | 4.00 | 30 |
| 9/10 | 9.0 | 14.0 | 67.0 | 10.0 | 4 | 4.50 | 30 |
| 10/10 | 10.0 | 14.0 | 67.0 | 10.0 | 4 | 5.00 | 30 |
| 12/12 | 12.0 | 16.0 | 74.0 | 12.0 | 4 | 6.00 | 30 |
| 14/14 | 14.0 | 18.0 | 75.0 | 14.0 | 4 | 7.00 | 30 |
| 16/16 | 16.0 | 22.0 | 83.0 | 16.0 | 4 | 8.00 | 30 |
| 20/20 | 20.0 | 26.0 | 93.0 | 20.0 | 4 | 10.00 | 30 |

| Dimension | Ø2 | Ø2.5 | Ø3 | Ø4 | Ø5 | Ø6 | Ø7 | Ø8 | Ø9 | Ø10 |
|--------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Infeed in mm | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD |
| Application | | | | | | | | | | |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|-----------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | |
| 1.1 | 46-55 | 160 | 0.03 | 0.031 | 0.034 | 0.045 | 0.06 | 0.07 | 0.07 | 0.09 | 0.09 | 0.1 |
| 1.2 | 56-60 | 125 | 0.029 | 0.03 | 0.033 | 0.042 | 0.058 | 0.068 | 0.068 | 0.085 | 0.085 | 0.095 |
| 1.3 | 60-65 | 110 | 0.028 | 0.029 | 0.032 | 0.04 | 0.055 | 0.065 | 0.065 | 0.08 | 0.08 | 0.09 |
| 1.4 | 66-70 | 85 | 0.024 | 0.025 | 0.028 | 0.035 | 0.05 | 0.06 | 0.06 | 0.07 | 0.07 | 0.08 |


| Dimension | Ø12 | Ø14 | Ø16 | Ø20 |
|--------------|------------------------|------------------------|------------------------|------------------------|
| Infeed in mm | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD |
| Application | | | | |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz |
|----------|-----------------|-------------|------|------|-------|------|
| H | HARDENED STEEL | Vc (m/min) | | | | |
| 1.1 | 46-55 | 160 | 0.12 | 0.12 | 0.125 | 0.15 |
| 1.2 | 56-60 | 125 | 0.11 | 0.11 | 0.115 | 0.14 |
| 1.3 | 60-65 | 110 | 0.1 | 0.1 | 0.105 | 0.12 |
| 1.4 | 66-70 | 85 | 0.09 | 0.09 | 0.095 | 0.11 |

| | |
|-----------|----------------|
| Cooling | |
| Tolerance | f8 |
| Coating | AlphaDura Navy |

| | |
|-------------|-----------------------|
| Strategy | HSC HPC |
| Application | |
| Features | HA |

- Ultrafine carbide grade specially developed for machining hardened steels
- Adapted rake angle for safe milling up to 70 HRC
- Defined cutting edge preparation for homogeneous wear

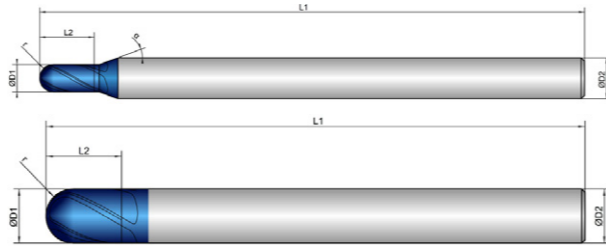

- Long version for deeper cavities

- 4 cutting edges to the center
- Radius tolerance $r \leq 2$ mm: ± 0.003 mm
- Radius tolerance $r > 2$ mm: ± 0.005 mm

Roughing



Finishing



| | D1 | L2 | L1 | D2 | z | r | α |
|---------|---------------------|------|-------|---------------------|---|-------|----------|
| K203343 | mm \varnothing | mm | mm | mm \varnothing | # | mm | ° |
| 2/3 | 2.0 | 4.0 | 75.0 | 3.0 | 4 | 1.00 | 30 |
| 2/6 | 2.0 | 4.0 | 80.0 | 6.0 | 4 | 1.00 | 30 |
| 2,5/6 | 2.5 | 5.0 | 80.0 | 6.0 | 4 | 1.25 | 30 |
| 3/3 | 3.0 | 5.0 | 75.0 | 3.0 | 4 | 1.50 | 30 |
| 3/6 | 3.0 | 5.0 | 80.0 | 6.0 | 4 | 1.50 | 30 |
| 4/4 | 4.0 | 8.0 | 75.0 | 4.0 | 4 | 2.00 | 30 |
| 4/6 | 4.0 | 8.0 | 80.0 | 6.0 | 4 | 2.00 | 30 |
| 5/5 | 5.0 | 9.0 | 75.0 | 5.0 | 4 | 2.50 | 30 |
| 5/6 | 5.0 | 9.0 | 100.0 | 6.0 | 4 | 2.50 | 30 |
| 6/6 | 6.0 | 10.0 | 100.0 | 6.0 | 4 | 3.00 | 30 |
| 8/8 | 8.0 | 12.0 | 100.0 | 8.0 | 4 | 4.00 | 30 |
| 10/10 | 10.0 | 14.0 | 100.0 | 10.0 | 4 | 5.00 | 30 |
| 12/12 | 12.0 | 16.0 | 100.0 | 12.0 | 4 | 6.00 | 30 |
| 14/14 | 14.0 | 18.0 | 100.0 | 14.0 | 4 | 7.00 | 30 |
| 16/16 | 16.0 | 22.0 | 150.0 | 16.0 | 4 | 8.00 | 30 |
| 20/20 | 20.0 | 26.0 | 150.0 | 20.0 | 4 | 10.00 | 30 |

| Dimension | Ø2 | Ø2,5 | Ø3 | Ø4 | Ø5 | Ø6 | Ø8 | Ø10 | Ø12 | Ø14 |
|--------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Infeed in mm | ae=0,05xD ap=0,05xD | ae=0,05xD ap=0,05xD | ae=0,05xD ap=0,05xD | ae=0,05xD ap=0,05xD | ae=0,05xD ap=0,05xD | ae=0,05xD ap=0,05xD | ae=0,05xD ap=0,05xD | ae=0,05xD ap=0,05xD | ae=0,05xD ap=0,05xD | ae=0,05xD ap=0,05xD |
| Application | | | | | | | | | | |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|-----------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | |
| 1.1 | 46-55 | 145 | 0,03 | 0,031 | 0,034 | 0,045 | 0,06 | 0,07 | 0,09 | 0,1 | 0,12 | 0,12 |
| 1.2 | 56-60 | 115 | 0,029 | 0,03 | 0,033 | 0,042 | 0,058 | 0,068 | 0,085 | 0,095 | 0,11 | 0,11 |
| 1.3 | 60-65 | 100 | 0,028 | 0,029 | 0,032 | 0,04 | 0,055 | 0,065 | 0,08 | 0,09 | 0,1 | 0,1 |
| 1.4 | 66-70 | 75 | 0,024 | 0,025 | 0,028 | 0,035 | 0,05 | 0,06 | 0,07 | 0,08 | 0,09 | 0,09 |

| Dimension | Ø16 | Ø20 |
|--------------|------------------------|------------------------|
| Infeed in mm | ae=0,05xD ap=0,05xD | ae=0,05xD ap=0,05xD |
| Application | | |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz |
|----------|-----------------|-------------|-------|------|
| H | HARDENED STEEL | Vc (m/min) | | |
| 1.1 | 46-55 | 145 | 0,125 | 0,15 |
| 1.2 | 56-60 | 115 | 0,115 | 0,14 |
| 1.3 | 60-65 | 100 | 0,105 | 0,12 |
| 1.4 | 66-70 | 75 | 0,095 | 0,11 |

Cooling

Tolerance -



Coating AlphaDura Navy

Strategy

Application

Features **HA**

- Ultrafine carbide grade specially developed for machining hardened steels
- Defined cutting edge preparation for homogeneous wear
- Specially for deburring hardened steels

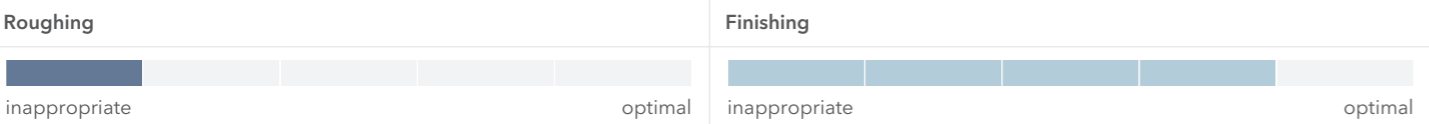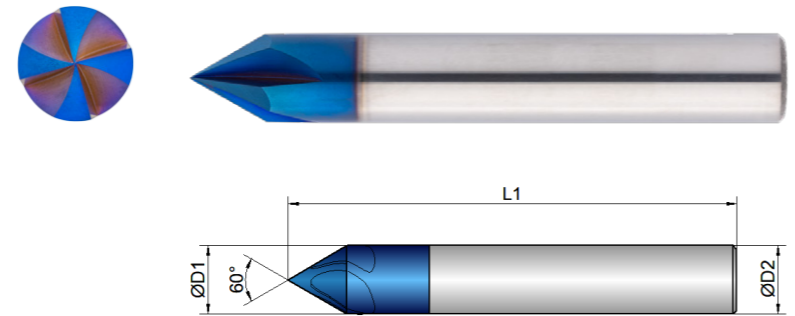

| | D1 mm Ø | L1 mm | D2 mm Ø | z # |
|----------------|-------------------|--------------|-------------------|------------|
| K205153 | | | | |
| 3 | 3.0 | 50.0 | 3.0 | 3 |
| 4 | 4.0 | 50.0 | 4.0 | 4 |
| 6 | 6.0 | 50.0 | 6.0 | 4 |
| 8 | 8.0 | 59.0 | 8.0 | 4 |
| 10 | 10.0 | 66.0 | 10.0 | 4 |
| 12 | 12.0 | 73.0 | 12.0 | 4 |

| Dimension | Ø3 | Ø4 | Ø6 | Ø8 | Ø10 | Ø12 |
|--------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Infeed in mm | ae= 0.1xD ap= L2 max | ae= 0.1xD ap= L2 max | ae= 0.1xD ap= L2 max | ae= 0.1xD ap= L2 max | ae= 0.1xD ap= L2 max | ae= 0.1xD ap= L2 max |
| Application | | | | | | |

| H | Material | Hardness in HRC | Feed (mm/Z) | | | | | | |
|-----|----------------|-----------------|-------------|-------|-------|-------|-------|-------|-------|
| | | | Vc (m/min) | fz | fz | fz | fz | fz | fz |
| 1.1 | HARDENED STEEL | 46-55 | 105 | 0.02 | 0.025 | 0.03 | 0.04 | 0.05 | 0.06 |
| 1.2 | | 56-60 | 95 | 0.015 | 0.02 | 0.025 | 0.035 | 0.045 | 0.055 |
| 1.3 | | 60-65 | 70 | 0.012 | 0.018 | 0.022 | 0.03 | 0.04 | 0.05 |
| 1.4 | | 66-70 | 45 | 0.01 | 0.015 | 0.018 | 0.02 | 0.03 | 0.04 |

Cooling

Tolerance -


Coating AlphaDura Navy

Strategy

Application

Features **HB**

- Ultrafine carbide grade specially developed for machining hardened steels
- Defined cutting edge preparation for homogeneous wear
- Specially for deburring hardened steels

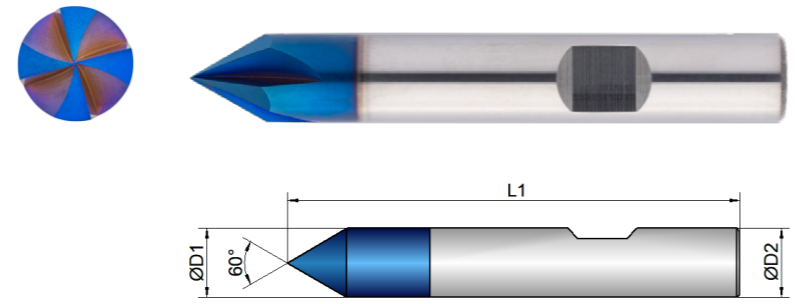

Roughing

Finishing

| | D1 mm ø | L1 mm | D2 mm ø | z # |
|---------|-------------------|--------------|-------------------|------------|
| K205154 | | | | |
| 6 | 6.0 | 50.0 | 6.0 | 4 |
| 8 | 8.0 | 59.0 | 8.0 | 4 |
| 10 | 10.0 | 66.0 | 10.0 | 4 |
| 12 | 12.0 | 73.0 | 12.0 | 4 |

| Dimension | Ø6 | Ø8 | Ø10 | Ø12 |
|--------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Infeed in mm | ae= 0.1xD ap= L2 max | ae= 0.1xD ap= L2 max | ae= 0.1xD ap= L2 max | ae= 0.1xD ap= L2 max |
| Application | | | | |

| H | Material | Hardness in HRC | Feed (mm/Z) | | | | |
|-----|----------------|-----------------|-------------|-------|-------|-------|-------|
| | | | Vc (m/min) | fz | fz | fz | fz |
| 1.1 | HARDENED STEEL | 46-55 | 105 | 0.03 | 0.04 | 0.05 | 0.06 |
| 1.2 | | 56-60 | 95 | 0.025 | 0.035 | 0.045 | 0.055 |
| 1.3 | | 60-65 | 70 | 0.022 | 0.03 | 0.04 | 0.05 |
| 1.4 | | 66-70 | 45 | 0.018 | 0.02 | 0.03 | 0.04 |

Cooling

Tolerance -



Coating AlphaDura Navy

Strategy

Application

Features **HA**

- Ultrafine carbide grade specially developed for machining hardened steels
- Defined cutting edge preparation for homogeneous wear
- Specially for deburring hardened steels

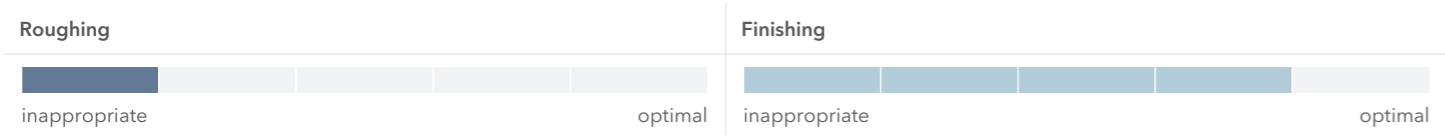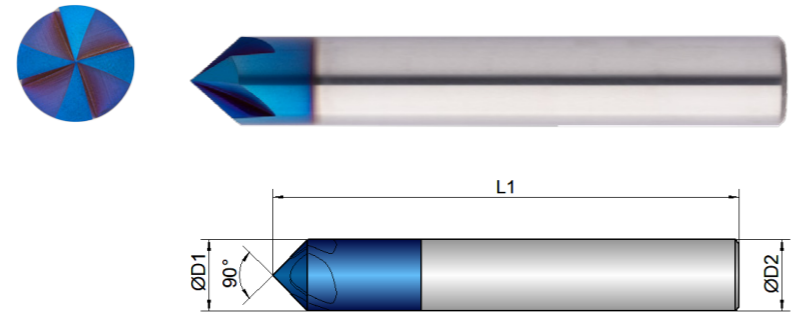

| | D1 mm Ø | L1 mm | D2 mm Ø | z # |
|---------|-------------------|--------------|-------------------|------------|
| K205163 | | | | |
| 3 | 3.0 | 50.0 | 3.0 | 3 |
| 4 | 4.0 | 50.0 | 4.0 | 4 |
| 6 | 6.0 | 50.0 | 6.0 | 4 |
| 8 | 8.0 | 59.0 | 8.0 | 4 |
| 10 | 10.0 | 66.0 | 10.0 | 4 |
| 12 | 12.0 | 73.0 | 12.0 | 4 |



| Dimension | Ø3 | Ø4 | Ø6 | Ø8 | Ø10 | Ø12 |
|--------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Infeed in mm | ae= 0.1xD ap= L2 max | ae= 0.1xD ap= L2 max | ae= 0.1xD ap= L2 max | ae= 0.1xD ap= L2 max | ae= 0.1xD ap= L2 max | ae= 0.1xD ap= L2 max |
| Application | | | | | | |

| H | Material | Hardness in HRC | Feed (mm/Z) | | | | | | |
|-----|----------------|-----------------|-------------|-------|-------|-------|-------|-------|-------|
| | | | Vc (m/min) | fz | fz | fz | fz | fz | fz |
| 1.1 | HARDENED STEEL | 46-55 | 105 | 0.02 | 0.025 | 0.03 | 0.04 | 0.05 | 0.06 |
| 1.2 | | 56-60 | 95 | 0.015 | 0.02 | 0.025 | 0.035 | 0.045 | 0.055 |
| 1.3 | | 60-65 | 70 | 0.012 | 0.018 | 0.022 | 0.03 | 0.04 | 0.05 |
| 1.4 | | 66-70 | 45 | 0.01 | 0.015 | 0.018 | 0.02 | 0.03 | 0.04 |

| | |
|-----------|----------------|
| Cooling | |
| Tolerance | - |
| Coating | AlphaDura Navy |

| | | |
|-------------|-----------|------|
| Strategy | | |
| Application | | |
| Features | HB | |

- Ultrafine carbide grade specially developed for machining hardened steels
- Defined cutting edge preparation for homogeneous wear
- Specially for deburring hardened steels

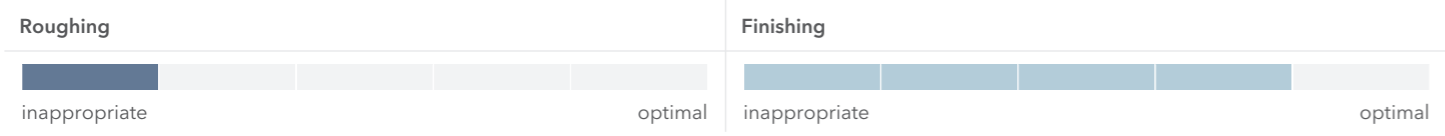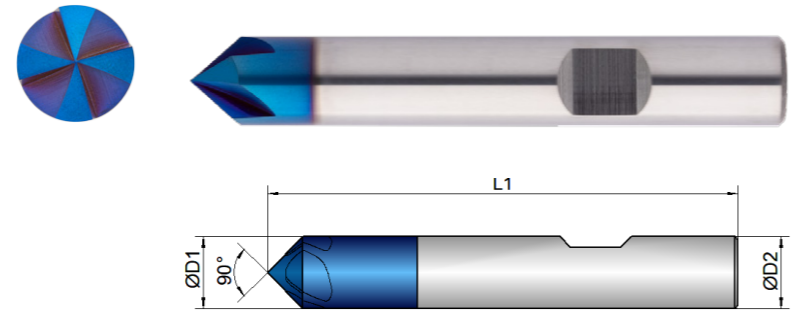

| | D1 mm ø | L1 mm | D2 mm ø | z # |
|---------|-------------------|--------------|-------------------|------------|
| K205164 | | | | |
| 6 | 6.0 | 50.0 | 6.0 | 4 |
| 8 | 8.0 | 59.0 | 8.0 | 4 |
| 10 | 10.0 | 66.0 | 10.0 | 4 |
| 12 | 12.0 | 73.0 | 12.0 | 4 |

| Dimension | Ø6 | Ø8 | Ø10 | Ø12 |
|--------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Infeed in mm | ae= 0.1xD ap= L2 max | ae= 0.1xD ap= L2 max | ae= 0.1xD ap= L2 max | ae= 0.1xD ap= L2 max |
| Application | | | | |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz |
|----------|-----------------|-------------|-------|-------|-------|-------|
| H | HARDENED STEEL | Vc (m/min) | | | | |
| 1.1 | 46-55 | 105 | 0.03 | 0.04 | 0.05 | 0.06 |
| 1.2 | 56-60 | 95 | 0.025 | 0.035 | 0.045 | 0.055 |
| 1.3 | 60-65 | 70 | 0.022 | 0.03 | 0.04 | 0.05 |
| 1.4 | 66-70 | 45 | 0.018 | 0.02 | 0.03 | 0.04 |

STILL CAN'T FIND A SUITABLE MILLING CUTTER?

No problem - simply customize an existing tool. Using our configurator for special milling cutters, you can customize existing tools to your needs in an instant or create your own tools based on predefined types.




WE WILL RESPOND TO ALL REQUESTS SUBMITTED VIA THE CONFIGURATOR WITHIN ONE WORKING DAY AT THE LATEST



| | |
|-----------|----------------|
| Cooling | |
| Tolerance | V1 |
| Coating | AlphaDura Navy |

| | |
|-------------|--|
| Strategy | |
| Application | |
| Features | |

- Ultrafine carbide grade specially developed for machining hardened steels
- Defined cutting edge preparation for homogeneous wear
- For the attachment of radii to components

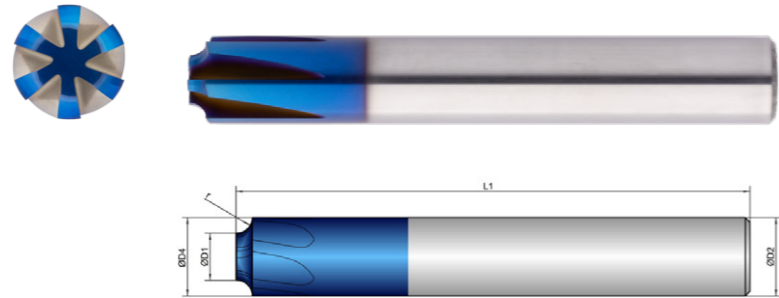

| Roughing | | | | | Finishing | | | | |
|---------------|--|--|--|--|-----------|--|--|--|--|
| inappropriate | | | | | optimal | | | | |

| K204108 | D5 mm Ø | D4 mm Ø | L1 mm | D2 mm Ø | z # | r mm |
|---------|---------------|---------------|----------|---------------|--------|---------|
| 3/0,5 | 3 | 4 | 50.0 | 4.0 | 6 | 0.50 |
| 3,2/0,4 | 3.2 | 4 | 50.0 | 4.0 | 6 | 0.40 |
| 3,4/0,3 | 3.4 | 4 | 50.0 | 4.0 | 6 | 0.30 |
| 3,6/0,2 | 3.6 | 4 | 50.0 | 4.0 | 6 | 0.20 |
| 4/1 | 4 | 6 | 50.0 | 6.0 | 6 | 1.00 |
| 4,4/0,8 | 4.4 | 6 | 50.0 | 6.0 | 6 | 0.80 |
| 4,8/0,6 | 4.8 | 6 | 50.0 | 6.0 | 6 | 0.60 |
| 5/1,5 | 7 | 10 | 66.0 | 10.0 | 6 | 1.50 |
| 5/10 | 5 | 25 | 100.0 | 25.0 | 6 | 10.00 |
| 6/2 | 6 | 10 | 66.0 | 10.0 | 6 | 2.00 |
| 6/3 | 6 | 12 | 73.0 | 12.0 | 6 | 3.00 |
| 7/2,5 | 7 | 12 | 73.0 | 12.0 | 6 | 2.50 |
| 7/4,5 | 7 | 16 | 80.0 | 16.0 | 6 | 4.50 |
| 8/4 | 8 | 16 | 80.0 | 16.0 | 6 | 4.00 |
| 8/6 | 8 | 20 | 93.0 | 20.0 | 6 | 6.00 |
| 9/3,5 | 9 | 16 | 80.0 | 16.0 | 6 | 3.50 |
| 9/8 | 9 | 25 | 100.0 | 25.0 | 6 | 8.00 |
| 10/5 | 10 | 20 | 93.0 | 20.0 | 6 | 5.00 |

| Dimension | Ø3.6 R0.2 | Ø3.4 R0.3 | Ø3.2 R0.4 | Ø3 R0.5 | Ø4.8 R0.6 | Ø4.4 R0.8 | Ø4 R1 | Ø5 R1.5 | Ø6 R2 | Ø7 R2.5 |
|--------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Infeed in mm | ae=rmax ap=rmax | ae=rmax ap=rmax | ae=rmax ap=rmax | ae=rmax ap=rmax | ae=rmax ap=rmax | ae=rmax ap=rmax | ae=rmax ap=rmax | ae=rmax ap=rmax | ae=rmax ap=rmax | ae=rmax ap=rmax |
| Application | | | | | | | | | | |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|-------------------------|-----------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| H HARDENED STEEL | | Vc (m/min) | | | | | | | | | | |
| 1.1 | 46-55 | 50 | 0.02 | 0.02 | 0.02 | 0.02 | 0.024 | 0.024 | 0.024 | 0.026 | 0.03 | 0.034 |
| 1.2 | 56-60 | 45 | 0.018 | 0.018 | 0.018 | 0.018 | 0.022 | 0.022 | 0.022 | 0.024 | 0.028 | 0.032 |
| 1.3 | 60-65 | 40 | 0.016 | 0.016 | 0.016 | 0.016 | 0.02 | 0.02 | 0.02 | 0.022 | 0.026 | 0.03 |
| 1.4 | 66-70 | 30 | 0.01 | 0.01 | 0.01 | 0.01 | 0.012 | 0.012 | 0.012 | 0.014 | 0.018 | 0.022 |

| Material | Strength (N/mm²) | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|--------------------------|---------------------------------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| M STAINLESS STEEL | | Vc (m/min) | | | | | | | | | | |
| 1.1 | ferritic/martensitic <850 | 95 | 0.03 | 0.03 | 0.03 | 0.03 | 0.035 | 0.035 | 0.035 | 0.035 | 0.045 | 0.045 |
| 2.1 | austenitic <650 | 85 | 0.028 | 0.028 | 0.028 | 0.028 | 0.033 | 0.033 | 0.033 | 0.033 | 0.042 | 0.042 |
| 2.2 | austenitic <750 | 80 | 0.026 | 0.026 | 0.026 | 0.026 | 0.031 | 0.031 | 0.031 | 0.031 | 0.04 | 0.04 |
| 3.1 | DUPLEX STEEL super austenitic <1100 | 60 | 0.02 | 0.02 | 0.02 | 0.02 | 0.022 | 0.022 | 0.022 | 0.022 | 0.03 | 0.03 |

| Dimension | Ø6 R3 | Ø9 R3.5 | Ø8 R4 | Ø7 R4.5 | Ø10 R5 | Ø8 R6 | Ø9 R8 | Ø5 R10 |
|--------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Infeed in mm | ae=rmax ap=rmax | ae=rmax ap=rmax | ae=rmax ap=rmax | ae=rmax ap=rmax | ae=rmax ap=rmax | ae=rmax ap=rmax | ae=rmax ap=rmax | ae=rmax ap=rmax |
| Application | | | | | | | | |


| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz |
|-------------------------|-----------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| H HARDENED STEEL | | Vc (m/min) | | | | | | | | |
| 1.1 | 46-55 | 50 | 0.034 | 0.036 | 0.036 | 0.036 | 0.038 | 0.038 | 0.042 | 0.042 |
| 1.2 | 56-60 | 45 | 0.032 | 0.034 | 0.034 | 0.034 | 0.036 | 0.036 | 0.04 | 0.04 |
| 1.3 | 60-65 | 40 | 0.03 | 0.032 | 0.032 | 0.032 | 0.034 | 0.034 | 0.038 | 0.038 |
| 1.4 | 66-70 | 30 | 0.022 | 0.022 | 0.022 | 0.022 | 0.024 | 0.024 | 0.028 | 0.028 |

| Material | Strength (N/mm²) | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz |
|--------------------------|---------------------------------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| M STAINLESS STEEL | | Vc (m/min) | | | | | | | | |
| 1.1 | ferritic/martensitic <850 | 95 | 0.05 | 0.055 | 0.055 | 0.055 | 0.06 | 0.06 | 0.065 | 0.065 |
| 2.1 | austenitic <650 | 85 | 0.048 | 0.053 | 0.053 | 0.053 | 0.058 | 0.058 | 0.063 | 0.063 |
| 2.2 | austenitic <750 | 80 | 0.045 | 0.05 | 0.05 | 0.05 | 0.055 | 0.055 | 0.06 | 0.06 |
| 3.1 | DUPLEX STEEL super austenitic <1100 | 60 | 0.035 | 0.04 | 0.04 | 0.04 | 0.045 | 0.045 | 0.05 | 0.05 |

Note | The values marked in turquoise are side applications! please use the arithmetic average from D2 and D1 to calculate cutting datas. For example tool Ø5 R10. D1=Ø5; R=10 calculated diameter = Ø15 Formula: D1+R= Result Example: 5mm+10mm=15mm




| | |
|-----------|----------------|
| Cooling | |
| Tolerance | d04 |
| Coating | AlphaDura Navy |

| | | |
|-------------|------------|--|
| Strategy | HSC | |
| Application | | |
| Features | HA | |







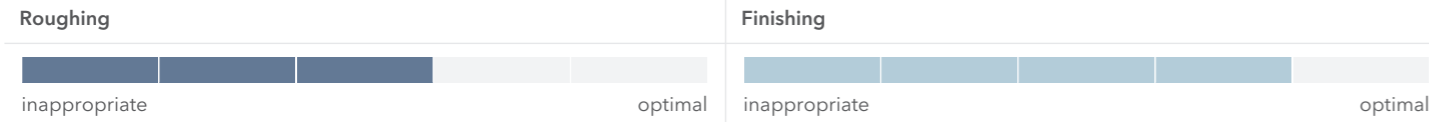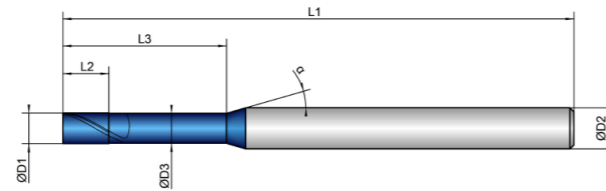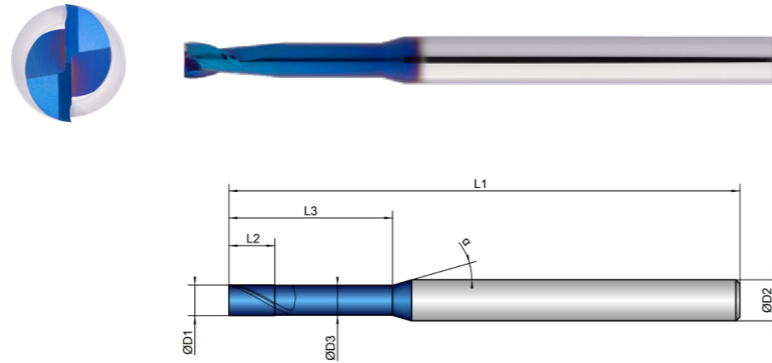




- Ultrafine carbide grade developed for machining hardened steels
- Optimized face geometry for long tool life and highest dimensional accuracy
- Reinforced core for milling up to 70 HRC










- Tolerance D1: -0.001/-0.006 mm
- Tolerance D3: 0/-0.02 mm



| K201122 | D1 mm ø | D3 mm ø | L2 mm | L3 mm | L1 mm | D2 mm ø | z # | | α ° |
|---------|---------------|---------------|----------|----------|----------|---------------|--------|----|---------------|
| 0,2X0,5 | 0.2 | 0.18 | 0.3 | 0.5 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,2X1 | 0.2 | 0.18 | 0.3 | 1.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,2X1,5 | 0.2 | 0.18 | 0.3 | 1.5 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,3X1 | 0.3 | 0.28 | 0.4 | 1.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,3X2 | 0.3 | 0.28 | 0.4 | 2.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,3X3 | 0.3 | 0.28 | 0.4 | 3.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,3X6 | 0.3 | 0.28 | 0.4 | 6.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,3X9 | 0.3 | 0.28 | 0.4 | 9.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,4X2 | 0.4 | 0.38 | 0.6 | 2.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,4X3 | 0.4 | 0.38 | 0.6 | 3.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,4X4 | 0.4 | 0.38 | 0.6 | 4.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,4X5 | 0.4 | 0.38 | 0.6 | 5.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,4X8 | 0.4 | 0.38 | 0.6 | 8.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,4X12 | 0.4 | 0.38 | 0.6 | 12.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,5X2 | 0.5 | 0.48 | 0.7 | 2.0 | 45.0 | 4.0 | 2 | 30 | 16 |

| K201122 | D1 mm ø | D3 mm ø | L2 mm | L3 mm | L1 mm | D2 mm ø | z # | | α ° |
|---------|---------------|---------------|----------|----------|----------|---------------|--------|----|---------------|
| 0,5X4 | 0.5 | 0.48 | 0.7 | 4.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,5X6 | 0.5 | 0.48 | 0.7 | 6.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,5X8 | 0.5 | 0.48 | 0.7 | 8.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,5X10 | 0.5 | 0.48 | 0.7 | 10.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 0,5X15 | 0.5 | 0.48 | 0.7 | 15.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 0,6X2 | 0.6 | 0.58 | 0.9 | 2.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,6X4 | 0.6 | 0.58 | 0.9 | 4.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,6X6 | 0.6 | 0.58 | 0.9 | 6.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,6X8 | 0.6 | 0.58 | 0.9 | 8.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,6X10 | 0.6 | 0.58 | 0.9 | 10.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,6X12 | 0.6 | 0.58 | 0.9 | 12.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 0,6X18 | 0.6 | 0.58 | 0.9 | 18.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 0,7X2 | 0.7 | 0.68 | 1.0 | 2.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,7X4 | 0.7 | 0.68 | 1.0 | 4.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,7X6 | 0.7 | 0.68 | 1.0 | 6.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,7X8 | 0.7 | 0.68 | 1.0 | 8.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,7X10 | 0.7 | 0.68 | 1.0 | 10.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 0,8X4 | 0.8 | 0.78 | 1.2 | 4.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,8X6 | 0.8 | 0.78 | 1.2 | 6.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,8X8 | 0.8 | 0.78 | 1.2 | 8.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,8X10 | 0.8 | 0.78 | 1.2 | 10.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 0,8X12 | 0.8 | 0.78 | 1.2 | 12.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 0,8X16 | 0.8 | 0.78 | 1.2 | 16.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 0,8X24 | 0.8 | 0.78 | 1.2 | 24.0 | 60.0 | 4.0 | 2 | 30 | 16 |
| 0,9X4 | 0.9 | 0.88 | 1.3 | 4.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,9X6 | 0.9 | 0.88 | 1.3 | 6.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,9X8 | 0.9 | 0.88 | 1.3 | 8.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,9X10 | 0.9 | 0.88 | 1.3 | 10.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 0,9X15 | 0.9 | 0.88 | 1.3 | 15.0 | 50.0 | 4.0 | 2 | 30 | 16 |

| K201122 | D1  mm ø | D3  mm ø | L2  mm | L3  mm | L1  mm | D2  mm ø | z  # |  ° | α  ° |
|---------|--|--|---|---|---|--|--|--|--|
| 1X4 | 1.0 | 0.95 | 1.5 | 4.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1X6 | 1.0 | 0.95 | 1.5 | 6.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1X8 | 1.0 | 0.95 | 1.5 | 8.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1X10 | 1.0 | 0.95 | 1.5 | 10.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1X12 | 1.0 | 0.95 | 1.5 | 12.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1X14 | 1.0 | 0.95 | 1.5 | 14.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1X16 | 1.0 | 0.95 | 1.5 | 16.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 1X20 | 1.0 | 0.95 | 1.5 | 20.0 | 54.0 | 4.0 | 2 | 30 | 16 |
| 1X25 | 1.0 | 0.95 | 1.5 | 25.0 | 70.0 | 4.0 | 2 | 30 | 16 |
| 1X30 | 1.0 | 0.95 | 1.5 | 30.0 | 70.0 | 4.0 | 2 | 30 | 16 |
| 1,2X6 | 1.2 | 1.14 | 1.8 | 6.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,2X8 | 1.2 | 1.14 | 1.8 | 8.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,2X10 | 1.2 | 1.14 | 1.8 | 10.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,2X12 | 1.2 | 1.14 | 1.8 | 12.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,2X16 | 1.2 | 1.14 | 1.8 | 16.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 1,2X20 | 1.2 | 1.14 | 1.8 | 20.0 | 60.0 | 4.0 | 2 | 30 | 16 |
| 1,4X6 | 1.4 | 1.34 | 2.1 | 6.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,4X8 | 1.4 | 1.34 | 2.1 | 8.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,4X10 | 1.4 | 1.34 | 2.1 | 10.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,4X12 | 1.4 | 1.34 | 2.1 | 12.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,4X14 | 1.4 | 1.34 | 2.1 | 14.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,4X16 | 1.4 | 1.34 | 2.1 | 16.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 1,4X22 | 1.4 | 1.34 | 2.1 | 22.0 | 54.0 | 4.0 | 2 | 30 | 16 |
| 1,5X6 | 1.5 | 1.44 | 2.3 | 6.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,5X8 | 1.5 | 1.44 | 2.3 | 8.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,5X10 | 1.5 | 1.44 | 2.3 | 10.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,5X12 | 1.5 | 1.44 | 2.3 | 12.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,5X14 | 1.5 | 1.44 | 2.3 | 14.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 1,5X16 | 1.5 | 1.44 | 2.3 | 16.0 | 50.0 | 4.0 | 2 | 30 | 16 |

| K201122 | D1  mm ø | D3  mm ø | L2  mm | L3  mm | L1  mm | D2  mm ø | z  # |  ° | α  ° |
|---------|--|--|---|---|---|--|---|--|--|
| 1,5X18 | 1.5 | 1.44 | 2.3 | 18.0 | 54.0 | 4.0 | 2 | 30 | 16 |
| 1,5X20 | 1.5 | 1.44 | 2.3 | 20.0 | 54.0 | 4.0 | 2 | 30 | 16 |
| 1,5X25 | 1.5 | 1.44 | 2.3 | 25.0 | 70.0 | 4.0 | 2 | 30 | 16 |
| 1,5X30 | 1.5 | 1.44 | 2.3 | 30.0 | 70.0 | 4.0 | 2 | 30 | 16 |
| 1,5X35 | 1.5 | 1.44 | 2.3 | 35.0 | 70.0 | 4.0 | 2 | 30 | 16 |
| 1,5X40 | 1.5 | 1.44 | 2.3 | 40.0 | 80.0 | 4.0 | 2 | 30 | 16 |
| 1,5X45 | 1.5 | 1.44 | 2.3 | 45.0 | 80.0 | 4.0 | 2 | 30 | 16 |
| 1,6X6 | 1.6 | 1.51 | 2.4 | 6.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,6X8 | 1.6 | 1.51 | 2.4 | 8.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,6X10 | 1.6 | 1.51 | 2.4 | 10.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,6X12 | 1.6 | 1.51 | 2.4 | 12.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,6X14 | 1.6 | 1.51 | 2.4 | 14.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 1,6X16 | 1.6 | 1.51 | 2.4 | 16.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 1,6X18 | 1.6 | 1.51 | 2.4 | 18.0 | 54.0 | 4.0 | 2 | 30 | 16 |
| 1,6X20 | 1.6 | 1.51 | 2.4 | 20.0 | 54.0 | 4.0 | 2 | 30 | 16 |
| 1,6X26 | 1.6 | 1.51 | 2.4 | 26.0 | 60.0 | 4.0 | 2 | 30 | 16 |
| 1,8X6 | 1.8 | 1.71 | 2.7 | 6.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,8X8 | 1.8 | 1.71 | 2.7 | 8.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,8X10 | 1.8 | 1.71 | 2.7 | 10.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,8X12 | 1.8 | 1.71 | 2.7 | 12.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 1,8X14 | 1.8 | 1.71 | 2.7 | 14.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 1,8X16 | 1.8 | 1.71 | 2.7 | 16.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 1,8X18 | 1.8 | 1.71 | 2.7 | 18.0 | 54.0 | 4.0 | 2 | 30 | 16 |
| 1,8X20 | 1.8 | 1.71 | 2.7 | 20.0 | 54.0 | 4.0 | 2 | 30 | 16 |
| 1,8X25 | 1.8 | 1.71 | 2.7 | 25.0 | 60.0 | 4.0 | 2 | 30 | 16 |
| 2X6 | 2.0 | 1.91 | 3.0 | 6.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 2X8 | 2.0 | 1.91 | 3.0 | 8.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 2X10 | 2.0 | 1.91 | 3.0 | 10.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 2X12 | 2.0 | 1.91 | 3.0 | 12.0 | 45.0 | 4.0 | 2 | 30 | 16 |

| K201122 | D1 | D3 | L2 | L3 | L1 | D2 | z | ° | α |
|---------|---------|---------|-----|------|-------|---------|---|----|----|
| | mm ∅ | mm ∅ | mm | mm | mm | mm ∅ | # | | |
| 2X14 | 2.0 | 1.91 | 3.0 | 14.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 2X16 | 2.0 | 1.91 | 3.0 | 16.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 2X18 | 2.0 | 1.91 | 3.0 | 18.0 | 54.0 | 4.0 | 2 | 30 | 16 |
| 2X20 | 2.0 | 1.91 | 3.0 | 20.0 | 54.0 | 4.0 | 2 | 30 | 16 |
| 2X25 | 2.0 | 1.91 | 3.0 | 25.0 | 60.0 | 4.0 | 2 | 30 | 16 |
| 2X30 | 2.0 | 1.91 | 3.0 | 30.0 | 70.0 | 4.0 | 2 | 30 | 16 |
| 2X35 | 2.0 | 1.91 | 3.0 | 35.0 | 80.0 | 4.0 | 2 | 30 | 16 |
| 2X40 | 2.0 | 1.91 | 3.0 | 40.0 | 90.0 | 4.0 | 2 | 30 | 16 |
| 2X50 | 2.0 | 1.91 | 3.0 | 50.0 | 100.0 | 4.0 | 2 | 30 | 16 |
| 2X60 | 2.0 | 1.91 | 3.0 | 60.0 | 110.0 | 4.0 | 2 | 30 | 16 |
| 2,5X8 | 2.5 | 2.41 | 3.7 | 8.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 2,5X10 | 2.5 | 2.41 | 3.7 | 10.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 2,5X12 | 2.5 | 2.41 | 3.7 | 12.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 2,5X14 | 2.5 | 2.41 | 3.7 | 14.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 2,5X16 | 2.5 | 2.41 | 3.7 | 16.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 2,5X18 | 2.5 | 2.41 | 3.7 | 18.0 | 54.0 | 4.0 | 2 | 30 | 16 |
| 2,5X20 | 2.5 | 2.41 | 3.7 | 20.0 | 54.0 | 4.0 | 2 | 30 | 16 |
| 2,5X25 | 2.5 | 2.41 | 3.7 | 25.0 | 60.0 | 4.0 | 2 | 30 | 16 |
| 2,5X30 | 2.5 | 2.41 | 3.7 | 30.0 | 70.0 | 4.0 | 2 | 30 | 16 |
| 2,5X40 | 2.5 | 2.41 | 3.7 | 40.0 | 90.0 | 4.0 | 2 | 30 | 16 |
| 2,5X50 | 2.5 | 2.41 | 3.7 | 50.0 | 100.0 | 4.0 | 2 | 30 | 16 |
| 3X8 | 3.0 | 2.92 | 4.5 | 8.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 3X12 | 3.0 | 2.92 | 4.5 | 12.0 | 45.0 | 4.0 | 2 | 30 | 16 |
| 3X16 | 3.0 | 2.92 | 4.5 | 16.0 | 50.0 | 4.0 | 2 | 30 | 16 |
| 3X20 | 3.0 | 2.92 | 4.5 | 20.0 | 54.0 | 4.0 | 2 | 30 | 16 |

| Dimension | ∅0.2x0.5 | | ∅0.2x1.5 | | ∅0.3x1 | | ∅0.3x9 | | ∅0.4x2 | | ∅0.4x12 | |
|--------------|-----------|-----------|-----------|-----------|-----------|-----------|------------|------------|-----------|-----------|------------|------------|
| Infeed in mm | ae=1xD | ae=0.1xD | ae=1xD | ae=0.07xD | ae=1xD | ae=0.1xD | ae=1xD | ae=0.006xD | ae=1xD | ae=0.1xD | ae=1xD | ae=0.006xD |
| Application | ap=0.05xD | ap=L2 max | ap=0.04xD | ap=L2 max | ap=0.05xD | ap=L2 max | ap=0.003xD | ap=L2 max | ap=0.05xD | ap=L2 max | ap=0.003xD | ap=L2 max |













| Material | Hardness in HRC | Feed (mm/Z) | Application | | | | | | | | | | | | | |
|----------|-----------------------|-------------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|----|--|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | | | | | |
| 1.1 | 46-55 | 110 | 0.005 | 0.009 | 0.005 | 0.009 | 0.008 | 0.012 | 0.003 | 0.005 | 0.008 | 0.012 | 0.003 | 0.005 | | |
| 1.2 | 56-60 | 70 | 0.004 | 0.008 | 0.004 | 0.008 | 0.007 | 0.011 | 0.003 | 0.005 | 0.007 | 0.011 | 0.003 | 0.005 | | |
| 1.3 | 60-65 | 50 | 0.003 | 0.008 | 0.003 | 0.008 | 0.006 | 0.01 | 0.002 | 0.002 | 0.006 | 0.01 | 0.002 | 0.002 | | |
| 1.4 | 66-70 | 40 | 0.002 | 0.007 | 0.002 | 0.007 | 0.005 | 0.009 | 0.001 | 0.001 | 0.005 | 0.009 | 0.001 | 0.001 | | |

| Material | Strength (N/mm²) | Feed (mm/Z) | Application | | | | | | | | | | | | | |
|----------|---------------------------------|-------------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| M | STAINLESS STEEL | Vc (m/min) | | | | | | | | | | | | | | |
| 1.1 | ferritic/martensitic | <850 | 90 | 0.006 | 0.01 | 0.006 | 0.01 | 0.009 | 0.013 | 0.004 | 0.006 | 0.009 | 0.013 | 0.004 | 0.006 | |
| 2.1 | austenitic | <650 | 75 | 0.005 | 0.009 | 0.005 | 0.009 | 0.008 | 0.012 | 0.003 | 0.005 | 0.008 | 0.012 | 0.003 | 0.005 | |
| 2.2 | austenitic | <750 | 70 | 0.004 | 0.008 | 0.004 | 0.008 | 0.007 | 0.011 | 0.002 | 0.003 | 0.007 | 0.011 | 0.002 | 0.003 | |
| 3.1 | DUPLEX STEEL super austenitic | <1100 | 50 | 0.003 | 0.007 | 0.003 | 0.007 | 0.006 | 0.01 | 0.001 | 0.002 | 0.006 | 0.01 | 0.001 | 0.002 | |
| N | COPPER | Vc (m/min) | | | | | | | | | | | | | | |
| | Tungsten Copper (WCu) | <700 | 110 | 0.006 | 0.01 | 0.006 | 0.01 | 0.009 | 0.013 | 0.004 | 0.006 | 0.009 | 0.013 | 0.004 | 0.006 | |

| Material | Strength (N/mm²) | Feed (mm/Z) | Application | | | | | | | | | | | | | |
|----------|------------------|-------------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| P | STEEL | Vc (m/min) | | | | | | | | | | | | | | |
| 1.1 | unalloyed | <500 | 190 | 0.008 | 0.012 | 0.008 | 0.012 | 0.011 | 0.015 | 0.006 | 0.008 | 0.011 | 0.015 | 0.006 | 0.008 | |
| 1.2-1.5 | unalloyed | <1100 | 180 | 0.008 | 0.012 | 0.008 | 0.012 | 0.011 | 0.015 | 0.006 | 0.008 | 0.011 | 0.015 | 0.006 | 0.008 | |
| 2.1-2.2 | low-alloyed | <950 | 170 | 0.007 | 0.011 | 0.007 | 0.011 | 0.01 | 0.014 | 0.005 | 0.007 | 0.01 | 0.014 | 0.005 | 0.007 | |
| 2.3-2.4 | low-alloyed | <1300 | 150 | 0.007 | 0.011 | 0.007 | 0.011 | 0.01 | 0.014 | 0.005 | 0.007 | 0.01 | 0.014 | 0.005 | 0.007 | |
| 3.1-3.2 | high-alloyed | <1100 | 150 | 0.006 | 0.01 | 0.006 | 0.01 | 0.009 | 0.013 | 0.004 | 0.006 | 0.009 | 0.013 | 0.004 | 0.006 | |
| 3.3 | high-alloyed | <1400 | 130 | 0.005 | 0.009 | 0.005 | 0.009 | 0.008 | 0.012 | 0.003 | 0.005 | 0.008 | 0.012 | 0.003 | 0.005 | |

| Material | Strength (N/mm²) | Feed (mm/Z) | Application | | | | | | | | | | | | | |
|----------|---------------------|-------------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| K | CASTINGS | Vc (m/min) | | | | | | | | | | | | | | |
| 1.1-1.2 | Grey cast iron | <1000 | 190 | 0.008 | 0.012 | 0.008 | 0.012 | 0.011 | 0.015 | 0.006 | 0.008 | 0.011 | 0.015 | 0.006 | 0.008 | |
| 2.1-2.2 | Modular cast iron | <850 | 180 | 0.007 | 0.011 | 0.007 | 0.011 | 0.01 | 0.014 | 0.005 | 0.007 | 0.01 | 0.014 | 0.005 | 0.007 | |
| 3.1-3.2 | Malleable cast iron | <800 | 170 | 0.007 | 0.011 | 0.007 | 0.011 | 0.01 | 0.014 | 0.005 | 0.007 | 0.01 | 0.014 | 0.005 | 0.007 | |

Note | The values marked in turquoise are side applications!
Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values.

| Material | Hardness in HRC | Dimension | Ø 0.5x2 | | Ø 0.5x15 | | Ø 0.6x2 | | Ø 0.6x18 | | Ø 0.7x2 | | Ø 0.7x10 | |
|----------|-----------------------|-------------|---|---|---|---|---|---|---|--|---|---|---|---|
| | | | Infeed in mm | | Infeed in mm | | Infeed in mm | | Infeed in mm | | Infeed in mm | | Infeed in mm | |
| | | | ae= | ae= | ae= | ae= | ae= | ae= | ae= | ae= | ae= | ae= | ae= | ae= |
| | | | 1xD | 0.1xD | 1xD | 0.006xD | 1xD | 0.1xD | 1xD | 0.006xD | 1xD | 0.1xD | 1xD | 0.05xD |
| | | | ap= | ap= | ap= | ap= | ap= | ap= | ap= | ap= | ap= | ap= | ap= | ap= |
| | | | 0.05xD | L2 max | 0.003xD | L2 max | 0.05xD | L2 max | 0.003xD | L2 max | 0.05xD | L2 max | 0.018xD | L2 max |
| | | |  |  |  |  |  |  |  |  |  |  |  |  |
| | | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| | | Vc (m/min) | | | | | | | | | | | | |
| H | HARDENED STEEL | | | | | | | | | | | | | |
| 1.1 | 46-55 | 110 | 0.012 | 0.015 | 0.004 | 0.006 | 0.012 | 0.015 | 0.004 | 0.006 | 0.012 | 0.015 | 0.008 | 0.012 |
| 1.2 | 56-60 | 70 | 0.011 | 0.014 | 0.004 | 0.006 | 0.011 | 0.014 | 0.004 | 0.006 | 0.011 | 0.014 | 0.007 | 0.011 |
| 1.3 | 60-65 | 50 | 0.01 | 0.013 | 0.003 | 0.005 | 0.01 | 0.013 | 0.003 | 0.005 | 0.01 | 0.013 | 0.006 | 0.01 |
| 1.4 | 66-70 | 40 | 0.009 | 0.012 | 0.002 | 0.004 | 0.009 | 0.012 | 0.002 | 0.004 | 0.009 | 0.012 | 0.005 | 0.009 |









| Material | Strength (N/mm²) | Feed (mm/Z) | Strength (N/mm²) | | | | | | | | | | | | |
|----------|---------------------------------|-------------|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | Feed (mm/Z) | | | | | | | | | | | | |
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| M | STAINLESS STEEL | | | | | | | | | | | | | | |
| 1.1 | ferritic/martensitic | <850 | 90 | 0.013 | 0.016 | 0.005 | 0.006 | 0.013 | 0.016 | 0.005 | 0.007 | 0.013 | 0.016 | 0.009 | 0.013 |
| 2.1 | austenitic | <650 | 75 | 0.012 | 0.015 | 0.004 | 0.005 | 0.012 | 0.015 | 0.004 | 0.006 | 0.012 | 0.015 | 0.008 | 0.012 |
| 2.2 | austenitic | <750 | 70 | 0.011 | 0.014 | 0.003 | 0.004 | 0.011 | 0.014 | 0.003 | 0.005 | 0.011 | 0.014 | 0.007 | 0.011 |
| 3.1 | DUPLEX STEEL super austenitic | <1100 | 50 | 0.01 | 0.013 | 0.002 | 0.003 | 0.01 | 0.013 | 0.002 | 0.004 | 0.01 | 0.013 | 0.006 | 0.01 |

| Material | Strength (N/mm²) | Strength (N/mm²) | | | | | | | | | | | | | | |
|-----------------------|------------------|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|----|--|
| | | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| N | COPPER | | | | | | | | | | | | | | | |
| Tungsten Copper (WCu) | <700 | 110 | 0.013 | 0.016 | 0.005 | 0.006 | 0.013 | 0.016 | 0.005 | 0.007 | 0.013 | 0.016 | 0.009 | 0.013 | | |

| Material | Strength (N/mm²) | Strength (N/mm²) | | | | | | | | | | | | | | |
|----------|------------------|------------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|
| | | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| P | STEEL | | | | | | | | | | | | | | | |
| 1.1 | unalloyed | <500 | 190 | 0.015 | 0.02 | 0.007 | 0.009 | 0.015 | 0.02 | 0.007 | 0.009 | 0.015 | 0.02 | 0.011 | 0.017 | |
| 1.2-1.5 | unalloyed | <1100 | 180 | 0.015 | 0.02 | 0.007 | 0.009 | 0.015 | 0.02 | 0.007 | 0.009 | 0.015 | 0.02 | 0.011 | 0.017 | |
| 2.1-2.2 | low-alloyed | <950 | 170 | 0.014 | 0.018 | 0.006 | 0.008 | 0.014 | 0.018 | 0.006 | 0.008 | 0.014 | 0.018 | 0.01 | 0.015 | |
| 2.3-2.4 | low-alloyed | <1300 | 150 | 0.014 | 0.018 | 0.006 | 0.008 | 0.014 | 0.018 | 0.006 | 0.008 | 0.014 | 0.018 | 0.01 | 0.015 | |
| 3.1-3.2 | high-alloyed | <1100 | 150 | 0.013 | 0.016 | 0.005 | 0.007 | 0.013 | 0.016 | 0.005 | 0.007 | 0.013 | 0.016 | 0.009 | 0.013 | |
| 3.3 | high-alloyed | <1400 | 130 | 0.012 | 0.015 | 0.004 | 0.006 | 0.012 | 0.015 | 0.004 | 0.006 | 0.012 | 0.015 | 0.008 | 0.012 | |

| Material | Strength (N/mm²) | Strength (N/mm²) | | | | | | | | | | | | | | |
|----------|---------------------|------------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|
| | | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| K | CASTINGS | | | | | | | | | | | | | | | |
| 1.1-1.2 | Grey cast iron | <1000 | 190 | 0.015 | 0.02 | 0.007 | 0.009 | 0.015 | 0.02 | 0.007 | 0.009 | 0.015 | 0.02 | 0.011 | 0.017 | |
| 2.1-2.2 | Modular cast iron | <850 | 180 | 0.014 | 0.018 | 0.006 | 0.008 | 0.014 | 0.018 | 0.006 | 0.008 | 0.014 | 0.018 | 0.01 | 0.015 | |
| 3.1-3.2 | Malleable cast iron | <800 | 170 | 0.014 | 0.018 | 0.006 | 0.008 | 0.014 | 0.018 | 0.006 | 0.008 | 0.014 | 0.018 | 0.01 | 0.015 | |

Note | The values marked in turquoise are side applications!
Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values.

| Material | Hardness in HRC | Dimension | Ø 0.8x4 | | Ø 0.8x24 | | Ø 0.9x4 | | Ø 0.9x15 | |
|----------|-----------------------|-------------|---|---|---|---|---|---|---|---|
| | | | Infeed in mm | | Infeed in mm | | Infeed in mm | | Infeed in mm | |
| | | | ae= | ae= | ae= | ae= | ae= | ae= | ae= | ae= |
| | | | 1xD | 0.1xD | 1xD | 0.006xD | 1xD | 0.1xD | 1xD | 0.015xD |
| | | | ap= | ap= | ap= | ap= | ap= | ap= | ap= | ap= |
| | | | 0.05xD | L2 max | 0.003xD | L2 max | 0.05xD | L2 max | 0.008xD | L2 max |
| | | |  |  |  |  |  |  |  |  |
| | | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz |
| | | Vc (m/min) | | | | | | | | |
| H | HARDENED STEEL | | | | | | | | | |
| 1.1 | 46-55 | 110 | 0.014 | 0.017 | 0.006 | 0.01 | 0.014 | 0.017 | 0.01 | 0.012 |
| 1.2 | 56-60 | 70 | 0.013 | 0.016 | 0.005 | 0.009 | 0.013 | 0.016 | 0.009 | 0.011 |
| 1.3 | 60-65 | 50 | 0.012 | 0.015 | 0.004 | 0.008 | 0.012 | 0.015 | 0.008 | 0.01 |
| 1.4 | 66-70 | 40 | 0.011 | 0.014 | 0.003 | 0.007 | 0.011 | 0.014 | 0.007 | 0.009 |

| Material | Strength (N/mm²) | Feed (mm/Z) | Strength (N/mm²) | | | | | | | | |
|----------|---------------------------------|-------------|------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | Feed (mm/Z) | | | | | | | | |
| | | | fz | fz | fz | fz | fz | fz | fz | fz | |
| M | STAINLESS STEEL | | | | | | | | | | |
| 1.1 | ferritic/martensitic | <850 | 90 | 0.015 | 0.018 | 0.007 | 0.011 | 0.015 | 0.018 | 0.011 | 0.013 |
| 2.1 | austenitic | <650 | 75 | 0.014 | 0.017 | 0.006 | 0.01 | 0.014 | 0.017 | 0.01 | 0.012 |
| 2.2 | austenitic | <750 | 70 | 0.013 | 0.016 | 0.005 | 0.009 | 0.013 | 0.016 | 0.009 | 0.011 |
| 3.1 | DUPLEX STEEL super austenitic | <1100 | 50 | 0.012 | 0.015 | 0.004 | 0.008 | 0.012 | 0.015 | 0.008 | 0.01 |

| Material | Strength (N/mm²) | Strength (N/mm²) | | | | | | | | | | |
|-----------------------|------------------|------------------|-------|-------|-------|-------|-------|-------|-------|-------|----|--|
| | | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| N | COPPER | | | | | | | | | | | |
| Tungsten Copper (WCu) | <700 | 110 | 0.015 | 0.018 | 0.007 | 0.011 | 0.015 | 0.018 | 0.011 | 0.013 | | |

| Material | Strength (N/mm²) | Strength (N/mm²) | | | | | | | | | | |
|----------|------------------|------------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|--|
| | | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| P | STEEL | | | | | | | | | | | |
| 1.1 | unalloyed | <500 | 190 | 0.017 | 0.022 | 0.009 | 0.014 | 0.017 | 0.022 | 0.013 | 0.016 | |
| 1.2-1.5 | unalloyed | <1100 | 180 | 0.017 | 0.022 | 0.009 | 0.014 | 0.017 | 0.022 | 0.013 | 0.016 | |
| 2.1-2.2 | low-alloyed | <950 | 170 | 0.016 | 0.02 | 0.008 | 0.013 | 0.016 | 0.02 | 0.012 | 0.015 | |
| 2.3-2.4 | low-alloyed | <1300 | 150 | 0.016 | 0.02 | 0.008 | 0.013 | 0.016 | 0.02 | 0.012 | 0.015 | |
| 3.1-3.2 | high-alloyed | <1100 | 150 | 0.015 | 0.018 | 0.007 | 0.011 | 0.015 | 0.018 | 0.011 | 0.013 | |
| 3.3 | high-alloyed | <1400 | 130 | 0.014 | 0.017 | 0.006 | 0.01 | 0.014 | 0.017 | 0.01 | 0.012 | |

| Material | Strength (N/mm²) | Strength (N/mm²) | | | | | | | | | | |
|----------|---------------------|------------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|--|
| | | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| K | CASTINGS | | | | | | | | | | | |
| 1.1-1.2 | Grey cast iron | <1000 | 190 | 0.017 | 0.022 | 0.009 | 0.014 | 0.017 | 0.022 | 0.013 | 0.016 | |
| 2.1-2.2 | Modular cast iron | <850 | 180 | 0.016 | 0.02 | 0.008 | 0.013 | 0.016 | 0.02 | 0.012 | 0.015 | |
| 3.1-3.2 | Malleable cast iron | <800 | 170 | 0.016 | 0.02 | 0.008 | 0.013 | 0.016 | 0.02 | 0.012 | 0.015 | |

Note | The values marked in turquoise are side applications!
Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values.

| Material | Hardness in HRC | Dimension | Ø1x4 | | Ø1x30 | | Ø1.2x6 | | Ø1.2x20 | | Ø1.4x6 | | Ø1.4x22 | |
|-------------------------|-----------------|-----------|--------------|----------|--------------|------------|--------------|----------|--------------|------------|--------------|----------|--------------|------------|
| | | | Infeed in mm | | Infeed in mm | | Infeed in mm | | Infeed in mm | | Infeed in mm | | Infeed in mm | |
| | | | ae=1xD | ae=0.1xD | ae=1xD | ae=0.006xD | ae=1xD | ae=0.1xD | ae=1xD | ae=0.015xD | ae=1xD | ae=0.1xD | ae=1xD | ae=0.015xD |
| H HARDENED STEEL | | | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| Vc (m/min) | | | | | | | | | | | | | | |
| 1.1 | 46-55 | 110 | 0.015 | 0.02 | 0.006 | 0.01 | 0.015 | 0.02 | 0.01 | 0.015 | 0.017 | 0.022 | 0.012 | 0.017 |
| 1.2 | 56-60 | 70 | 0.014 | 0.019 | 0.005 | 0.009 | 0.014 | 0.019 | 0.009 | 0.014 | 0.016 | 0.021 | 0.011 | 0.016 |
| 1.3 | 60-65 | 50 | 0.012 | 0.017 | 0.004 | 0.008 | 0.012 | 0.017 | 0.007 | 0.012 | 0.014 | 0.019 | 0.009 | 0.014 |
| 1.4 | 66-70 | 40 | 0.011 | 0.016 | 0.003 | 0.007 | 0.011 | 0.016 | 0.006 | 0.011 | 0.012 | 0.018 | 0.008 | 0.013 |

| Material | Strength (N/mm²) | Feed (mm/Z) | Infeed in mm | | | | | | | | | | | |
|--------------------------|---------------------------------------|-------------|--------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| | | | Vc (m/min) | | | | | | | | | | | |
| M STAINLESS STEEL | | | | | | | | | | | | | | |
| 1.1 | ferritic/martensitic <850 | 90 | 0.016 | 0.021 | 0.007 | 0.011 | 0.016 | 0.021 | 0.011 | 0.016 | 0.018 | 0.023 | 0.013 | 0.018 |
| 2.1 | austenitic <650 | 75 | 0.015 | 0.02 | 0.006 | 0.01 | 0.015 | 0.02 | 0.01 | 0.015 | 0.017 | 0.022 | 0.012 | 0.017 |
| 2.2 | austenitic <750 | 70 | 0.013 | 0.018 | 0.005 | 0.009 | 0.013 | 0.018 | 0.008 | 0.013 | 0.015 | 0.02 | 0.01 | 0.015 |
| 3.1 | DUPLEX STEEL super austenitic <1100 | 50 | 0.012 | 0.017 | 0.004 | 0.008 | 0.012 | 0.017 | 0.007 | 0.012 | 0.014 | 0.019 | 0.009 | 0.014 |

| N COPPER | | | Vc (m/min) | | | | | | | | | | | |
|-----------------|----------------------------|-----|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | Tungsten Copper (WCu) <700 | 110 | 0.016 | 0.021 | 0.007 | 0.011 | 0.016 | 0.021 | 0.011 | 0.016 | 0.018 | 0.023 | 0.013 | 0.018 |

| P STEEL | | | Vc (m/min) | | | | | | | | | | | |
|----------------|--------------------|-----|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1.1 | unalloyed <500 | 190 | 0.018 | 0.025 | 0.009 | 0.013 | 0.019 | 0.025 | 0.013 | 0.018 | 0.021 | 0.027 | 0.015 | 0.021 |
| 1.2-1.5 | unalloyed <1100 | 180 | 0.018 | 0.025 | 0.009 | 0.013 | 0.019 | 0.025 | 0.013 | 0.018 | 0.021 | 0.027 | 0.015 | 0.021 |
| 2.1-2.2 | low-alloyed <950 | 170 | 0.017 | 0.023 | 0.008 | 0.012 | 0.018 | 0.023 | 0.012 | 0.017 | 0.02 | 0.025 | 0.014 | 0.02 |
| 2.3-2.4 | low-alloyed <1300 | 150 | 0.017 | 0.023 | 0.008 | 0.012 | 0.018 | 0.023 | 0.012 | 0.017 | 0.02 | 0.025 | 0.014 | 0.02 |
| 3.1-3.2 | high-alloyed <1100 | 150 | 0.016 | 0.021 | 0.007 | 0.011 | 0.016 | 0.021 | 0.011 | 0.016 | 0.018 | 0.023 | 0.013 | 0.018 |
| 3.3 | high-alloyed <1400 | 130 | 0.015 | 0.02 | 0.006 | 0.01 | 0.015 | 0.02 | 0.01 | 0.015 | 0.017 | 0.022 | 0.012 | 0.017 |

| K CASTINGS | | | Vc (m/min) | | | | | | | | | | | |
|-------------------|--------------------------|-----|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1.1-1.2 | Grey cast iron <1000 | 190 | 0.018 | 0.025 | 0.009 | 0.013 | 0.019 | 0.025 | 0.013 | 0.018 | 0.021 | 0.027 | 0.015 | 0.021 |
| 2.1-2.2 | Modular cast iron <850 | 180 | 0.017 | 0.023 | 0.008 | 0.012 | 0.018 | 0.023 | 0.012 | 0.017 | 0.02 | 0.025 | 0.014 | 0.02 |
| 3.1-3.2 | Malleable cast iron <800 | 170 | 0.017 | 0.023 | 0.008 | 0.012 | 0.018 | 0.023 | 0.012 | 0.017 | 0.02 | 0.025 | 0.014 | 0.02 |

Note | The values marked in turquoise are side applications!
Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values.

| Material | Hardness in HRC | Dimension | Ø1.5x6 | | Ø1.5x45 | | Ø1.6x6 | | Ø1.6x26 | | Ø1.8x6 | | Ø1.8x25 | |
|-------------------------|-----------------|-----------|--------------|----------|--------------|------------|--------------|----------|--------------|-----------|--------------|----------|--------------|------------|
| | | | Infeed in mm | | Infeed in mm | | Infeed in mm | | Infeed in mm | | Infeed in mm | | Infeed in mm | |
| | | | ae=1xD | ae=0.1xD | ae=1xD | ae=0.006xD | ae=1xD | ae=0.1xD | ae=1xD | ae=0.02xD | ae=1xD | ae=0.1xD | ae=1xD | ae=0.035xD |
| H HARDENED STEEL | | | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| Vc (m/min) | | | | | | | | | | | | | | |
| 1.1 | 46-55 | 110 | 0.02 | 0.025 | 0.011 | 0.016 | 0.025 | 0.03 | 0.018 | 0.023 | 0.025 | 0.03 | 0.018 | 0.023 |
| 1.2 | 56-60 | 70 | 0.019 | 0.024 | 0.01 | 0.015 | 0.023 | 0.028 | 0.016 | 0.021 | 0.023 | 0.028 | 0.016 | 0.021 |
| 1.3 | 60-65 | 50 | 0.017 | 0.022 | 0.008 | 0.013 | 0.021 | 0.026 | 0.014 | 0.019 | 0.021 | 0.026 | 0.014 | 0.019 |
| 1.4 | 66-70 | 40 | 0.016 | 0.021 | 0.007 | 0.012 | 0.019 | 0.025 | 0.012 | 0.017 | 0.019 | 0.025 | 0.012 | 0.017 |

| Material | Strength (N/mm²) | Feed (mm/Z) | Infeed in mm | | | | | | | | | | | |
|--------------------------|---------------------------------------|-------------|--------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| | | | Vc (m/min) | | | | | | | | | | | |
| M STAINLESS STEEL | | | | | | | | | | | | | | |
| 1.1 | ferritic/martensitic <850 | 90 | 0.021 | 0.026 | 0.012 | 0.017 | 0.026 | 0.031 | 0.019 | 0.024 | 0.026 | 0.031 | 0.019 | 0.024 |
| 2.1 | austenitic <650 | 75 | 0.02 | 0.025 | 0.011 | 0.016 | 0.024 | 0.029 | 0.017 | 0.022 | 0.024 | 0.029 | 0.017 | 0.022 |
| 2.2 | austenitic <750 | 70 | 0.018 | 0.023 | 0.009 | 0.014 | 0.022 | 0.027 | 0.015 | 0.02 | 0.022 | 0.027 | 0.015 | 0.02 |
| 3.1 | DUPLEX STEEL super austenitic <1100 | 50 | 0.017 | 0.022 | 0.008 | 0.013 | 0.02 | 0.026 | 0.013 | 0.018 | 0.02 | 0.025 | 0.013 | 0.018 |

| N COPPER | | | Vc (m/min) | | | | | | | | | | | |
|-----------------|----------------------------|-----|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | Tungsten Copper (WCu) <700 | 110 | 0.021 | 0.026 | 0.012 | 0.017 | 0.026 | 0.031 | 0.019 | 0.024 | 0.026 | 0.031 | 0.019 | 0.024 |

| P STEEL | | | Vc (m/min) | | | | | | | | | | | |
|----------------|--------------------|-----|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1.1 | unalloyed <500 | 190 | 0.025 | 0.03 | 0.014 | 0.019 | 0.03 | 0.037 | 0.021 | 0.027 | 0.03 | 0.037 | 0.022 | 0.028 |
| 1.2-1.5 | unalloyed <1100 | 180 | 0.025 | 0.03 | 0.014 | 0.019 | 0.03 | 0.037 | 0.021 | 0.027 | 0.03 | 0.037 | 0.022 | 0.028 |
| 2.1-2.2 | low-alloyed <950 | 170 | 0.023 | 0.028 | 0.013 | 0.018 | 0.028 | 0.035 | 0.02 | 0.026 | 0.028 | 0.035 | 0.02 | 0.026 |
| 2.3-2.4 | low-alloyed <1300 | 150 | 0.023 | 0.028 | 0.013 | 0.018 | 0.028 | 0.035 | 0.02 | 0.026 | 0.028 | 0.035 | 0.02 | 0.026 |
| 3.1-3.2 | high-alloyed <1100 | 150 | 0.021 | 0.026 | 0.12 | 0.017 | 0.026 | 0.032 | 0.019 | 0.024 | 0.026 | 0.032 | 0.019 | 0.024 |
| 3.3 | high-alloyed <1400 | 130 | 0.02 | 0.025 | 0.011 | 0.016 | 0.025 | 0.03 | 0.018 | 0.023 | 0.025 | 0.03 | 0.018 | 0.023 |

| K CASTINGS | | | Vc (m/min) | | | | | | | | | | | |
|-------------------|--------------------------|-----|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1.1-1.2 | Grey cast iron <1000 | 190 | 0.025 | 0.03 | 0.014 | 0.019 | 0.03 | 0.037 | 0.021 | 0.027 | 0.03 | 0.037 | 0.022 | 0.028 |
| 2.1-2.2 | Modular cast iron <850 | 180 | 0.023 | 0.028 | 0.013 | 0.018 | 0.028 | 0.035 | 0.02 | 0.026 | 0.028 | 0.035 | 0.02 | 0.026 |
| 3.1-3.2 | Malleable cast iron <800 | 170 | 0.023 | 0.028 | 0.013 | 0.018 | 0.028 | 0.035 | 0.02 | 0.026 | 0.028 | 0.035 | 0.02 | 0.026 |

Note | The values marked in turquoise are side applications!
Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values.

| Material | Hardness in HRC | Dimension | Ø2x6 | | Ø2x60 | | Ø2.5x8 | | Ø2.5x50 | | Ø3x8 | | Ø3x20 | |
|----------|-----------------------|-------------------|--------------|-------------|------------|-----------|-----------|------------|------------|-----------|-----------|-----------|-----------|-----------|
| | | | Infeed in mm | Application | ae=1xD | ae=0.1xD | ae=1xD | ae=0.006xD | ae=1xD | ae=0.1xD | ae=1xD | ae=0.01xD | ae=1xD | ae=0.1xD |
| | | | ap=0.05xD | ap=L2 max | ap=0.003xD | ap=L2 max | ap=0.05xD | ap=L2 max | ap=0.004xD | ap=L2 max | ap=0.05xD | ap=L2 max | ap=0.04xD | ap=L2 max |
| | | | | | | | | | | | | | | |
| | | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | | | |
| 1.1 | 46-55 | 110 | 0.025 | 0.03 | 0.015 | 0.025 | 0.027 | 0.032 | 0.015 | 0.025 | 0.027 | 0.032 | 0.025 | 0.03 |
| 1.2 | 56-60 | 70 | 0.023 | 0.028 | 0.013 | 0.023 | 0.025 | 0.03 | 0.013 | 0.023 | 0.025 | 0.03 | 0.023 | 0.028 |
| 1.3 | 60-65 | 50 | 0.021 | 0.026 | 0.011 | 0.021 | 0.023 | 0.028 | 0.011 | 0.021 | 0.023 | 0.028 | 0.021 | 0.026 |
| 1.4 | 66-70 | 40 | 0.019 | 0.025 | 0.009 | 0.019 | 0.021 | 0.026 | 0.009 | 0.019 | 0.021 | 0.026 | 0.019 | 0.024 |

| Material | Strength (N/mm²) | Feed (mm/Z) | Strength (N/mm²) | | | | | | | | | | | | |
|----------|---------------------------------|-------------------|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| M | STAINLESS STEEL | Vc (m/min) | | | | | | | | | | | | | |
| 1.1 | ferritic/martensitic | <850 | 90 | 0.026 | 0.031 | 0.016 | 0.026 | 0.028 | 0.033 | 0.016 | 0.026 | 0.028 | 0.033 | 0.026 | 0.032 |
| 2.1 | austenitic | <650 | 75 | 0.024 | 0.029 | 0.014 | 0.024 | 0.026 | 0.031 | 0.014 | 0.024 | 0.026 | 0.031 | 0.024 | 0.03 |
| 2.2 | austenitic | <750 | 70 | 0.022 | 0.027 | 0.012 | 0.022 | 0.024 | 0.029 | 0.012 | 0.022 | 0.024 | 0.029 | 0.022 | 0.028 |
| 3.1 | DUPLEX STEEL super austenitic | <1100 | 50 | 0.02 | 0.025 | 0.01 | 0.02 | 0.02 | 0.027 | 0.01 | 0.02 | 0.022 | 0.027 | 0.02 | 0.026 |

| Material | Hardness in HRC | Feed (mm/Z) | Strength (N/mm²) | | | | | | | | | | | | |
|----------|-----------------------|-------------------|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| N | COPPER | Vc (m/min) | | | | | | | | | | | | | |
| | Tungsten Copper (WCu) | <700 | 110 | 0.026 | 0.031 | 0.016 | 0.026 | 0.028 | 0.033 | 0.016 | 0.026 | 0.028 | 0.033 | 0.026 | 0.032 |

| Material | Hardness in HRC | Feed (mm/Z) | Strength (N/mm²) | | | | | | | | | | | | |
|----------|-----------------|-------------------|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| P | STEEL | Vc (m/min) | | | | | | | | | | | | | |
| 1.1 | unalloyed | <500 | 190 | 0.03 | 0.037 | 0.018 | 0.028 | 0.032 | 0.039 | 0.018 | 0.03 | 0.032 | 0.04 | 0.03 | 0.037 |
| 1.2-1.5 | unalloyed | <1100 | 180 | 0.03 | 0.037 | 0.018 | 0.028 | 0.032 | 0.039 | 0.018 | 0.03 | 0.032 | 0.04 | 0.03 | 0.037 |
| 2.1-2.2 | low-alloyed | <950 | 170 | 0.028 | 0.035 | 0.017 | 0.027 | 0.03 | 0.037 | 0.017 | 0.028 | 0.03 | 0.037 | 0.028 | 0.035 |
| 2.3-2.4 | low-alloyed | <1300 | 150 | 0.028 | 0.035 | 0.017 | 0.027 | 0.03 | 0.037 | 0.017 | 0.028 | 0.03 | 0.037 | 0.028 | 0.035 |
| 3.1-3.2 | high-alloyed | <1100 | 150 | 0.026 | 0.032 | 0.016 | 0.026 | 0.028 | 0.034 | 0.016 | 0.026 | 0.028 | 0.034 | 0.026 | 0.032 |
| 3.3 | high-alloyed | <1400 | 130 | 0.025 | 0.03 | 0.015 | 0.025 | 0.027 | 0.032 | 0.015 | 0.025 | 0.027 | 0.032 | 0.025 | 0.03 |



| Material | Hardness in HRC | Feed (mm/Z) | Strength (N/mm²) | | | | | | | | | | | | |
|----------|---------------------|-------------------|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| K | CASTINGS | Vc (m/min) | | | | | | | | | | | | | |
| 1.1-1.2 | Grey cast iron | <1000 | 190 | 0.03 | 0.037 | 0.018 | 0.028 | 0.032 | 0.039 | 0.018 | 0.03 | 0.032 | 0.04 | 0.03 | 0.037 |
| 2.1-2.2 | Modular cast iron | <850 | 180 | 0.028 | 0.035 | 0.017 | 0.027 | 0.03 | 0.037 | 0.017 | 0.028 | 0.03 | 0.037 | 0.028 | 0.035 |
| 3.1-3.2 | Malleable cast iron | <800 | 170 | 0.028 | 0.035 | 0.017 | 0.027 | 0.03 | 0.037 | 0.017 | 0.028 | 0.03 | 0.037 | 0.028 | 0.035 |

Note | The values marked in turquoise are side applications!
 Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values.

| | |
|-----------|----------------|
| Cooling | |
| Tolerance | d04 |
| Coating | AlphaDura Navy |

| | | |
|-------------|------------|--|
| Strategy | HSC | |
| Application | | |
| Features | HA | |

- Ultrafine carbide grade developed for machining hardened steels
 - Optimized face geometry for long tool life and highest dimensional accuracy
 - Reinforced core for milling up to 70 HRC
-
- Multipass milling of 3D contours
-
- Tolerance D1: -0.001/-0.006 mm
 - Tolerance D3: 0/-0.02 mm
 - Radius tolerance r: 0/-0.003 mm (measured from 0-90°)

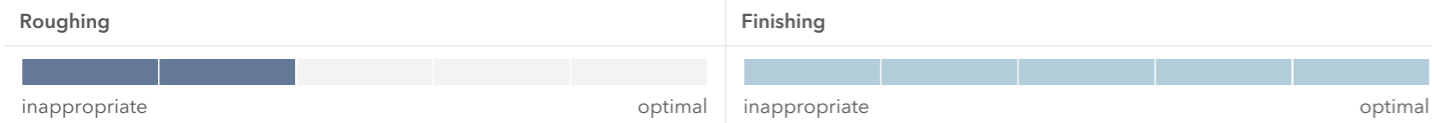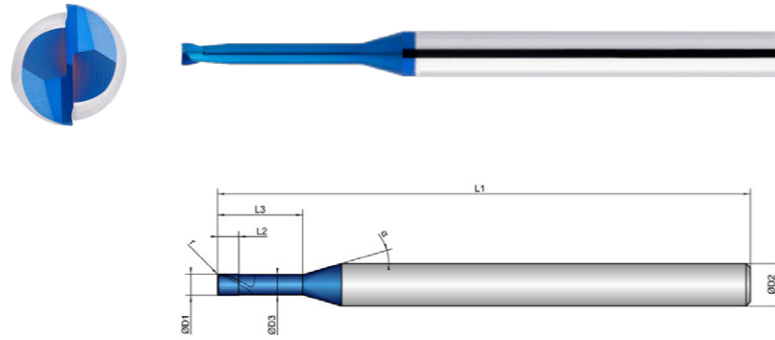

| K202082 | D1 mm ∅ | D3 mm ∅ | L2 mm | L3 mm | L1 mm | D2 mm ∅ | z # | r mm | | α ° |
|---------|---------------|---------------|----------|----------|----------|---------------|--------|---------|----|--------|
| 0,4X1 | 0.4 | 0.38 | 0.4 | 1.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,4X1,5 | 0.4 | 0.38 | 0.4 | 1.5 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,4X2 | 0.4 | 0.38 | 0.4 | 2.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,4X3 | 0.4 | 0.38 | 0.4 | 3.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,4X4 | 0.4 | 0.38 | 0.4 | 4.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,5X1 | 0.5 | 0.48 | 0.5 | 1.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,5X2 | 0.5 | 0.48 | 0.5 | 2.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,5X3 | 0.5 | 0.48 | 0.5 | 3.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,5X4 | 0.5 | 0.48 | 0.5 | 4.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,5X5 | 0.5 | 0.48 | 0.5 | 5.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,5X6 | 0.5 | 0.48 | 0.5 | 6.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,6X2 | 0.6 | 0.58 | 0.6 | 2.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |

| K202082 | D1 mm ∅ | D3 mm ∅ | L2 mm | L3 mm | L1 mm | D2 mm ∅ | z # | r mm | | α ° |
|---------|---------------|---------------|----------|----------|----------|---------------|--------|---------|----|--------|
| 0,6X3 | 0.6 | 0.58 | 0.6 | 3.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,6X4 | 0.6 | 0.58 | 0.6 | 4.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,6X6 | 0.6 | 0.58 | 0.6 | 6.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,6X8 | 0.6 | 0.58 | 0.6 | 8.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,7X4 | 0.7 | 0.68 | 0.7 | 4.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,7X6 | 0.7 | 0.68 | 0.7 | 6.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,8X4 | 0.8 | 0.78 | 0.8 | 4.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,8X6 | 0.8 | 0.78 | 0.8 | 6.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 1X2 | 1.0 | 0.95 | 1.0 | 2.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 1X4 | 1.0 | 0.95 | 1.0 | 4.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 1X6 | 1.0 | 0.95 | 1.0 | 6.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 1X8 | 1.0 | 0.95 | 1.0 | 8.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 1X10 | 1.0 | 0.95 | 1.0 | 10.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 1X12 | 1.0 | 0.95 | 1.0 | 12.0 | 54.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 1X16 | 1.0 | 0.95 | 1.0 | 16.0 | 60.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 1X20 | 1.0 | 0.95 | 1.0 | 20.0 | 60.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 2X4 | 2.0 | 1.91 | 2.0 | 4.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 2X6 | 2.0 | 1.91 | 2.0 | 6.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 2X8 | 2.0 | 1.91 | 2.0 | 8.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 2X10 | 2.0 | 1.91 | 2.0 | 10.0 | 50.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 2X12 | 2.0 | 1.91 | 2.0 | 12.0 | 54.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 2X16 | 2.0 | 1.91 | 2.0 | 16.0 | 54.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 2X20 | 2.0 | 1.91 | 2.0 | 20.0 | 60.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 2X26 | 2.0 | 1.91 | 2.0 | 26.0 | 70.0 | 4.0 | 2 | 0.10 | 30 | 16 |

| Dimension | Ø1x2 | | | Ø1x20 | | | Ø2x4 | | | Ø2x26 | | |
|--------------|-----------|-----------|----------|------------|-----------|-----------|-----------|-----------|----------|-----------|-----------|-----------|
| Infeed in mm | ae=1xD | ae=0.1xD | ae=0.1xD | ae=1xD | ae=0.01xD | ae=0.01xD | ae=1xD | ae=0.1xD | ae=0.1xD | ae=1xD | ae=0.06xD | ae=0.05xD |
| Application | ap=0.05xD | ap=L2 max | ap=0.1xD | ap=0.005xD | ap=L2 max | ap=0.01xD | ap=0.05xD | ap=L2 max | ap=0.1xD | ap=0.03xD | ap=L2 max | ap=0.05xD |

Hardness in HRC

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|-----------------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | | | |
| 1.1 | 46-55 | 110 | 0.015 | 0.02 | 0.022 | 0.007 | 0.01 | 0.012 | 0.025 | 0.03 | 0.032 | 0.02 | 0.025 | 0.027 |
| 1.2 | 56-60 | 70 | 0.014 | 0.019 | 0.021 | 0.006 | 0.009 | 0.011 | 0.023 | 0.028 | 0.03 | 0.019 | 0.024 | 0.026 |
| 1.3 | 60-65 | 50 | 0.012 | 0.017 | 0.019 | 0.005 | 0.008 | 0.01 | 0.021 | 0.026 | 0.028 | 0.018 | 0.023 | 0.025 |
| 1.4 | 66-70 | 40 | 0.011 | 0.016 | 0.018 | 0.004 | 0.007 | 0.009 | 0.019 | 0.025 | 0.027 | 0.017 | 0.022 | 0.024 |


Strength (N/mm²)

| Material | Strength (N/mm²) | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|---------------------------------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| M | STAINLESS STEEL | Vc (m/min) | | | | | | | | | | | | |
| 1.1 | ferritic/martensitic <850 | 90 | 0.016 | 0.021 | 0.023 | 0.006 | 0.011 | 0.013 | 0.026 | 0.031 | 0.033 | 0.021 | 0.026 | 0.028 |
| 2.1 | austenitic <650 | 75 | 0.015 | 0.02 | 0.022 | 0.005 | 0.01 | 0.012 | 0.024 | 0.029 | 0.031 | 0.019 | 0.025 | 0.027 |
| 2.2 | austenitic <750 | 70 | 0.013 | 0.018 | 0.02 | 0.004 | 0.008 | 0.01 | 0.022 | 0.027 | 0.029 | 0.017 | 0.024 | 0.026 |
| 3.1 | DUPLEX STEEL super austenitic <1100 | 50 | 0.012 | 0.017 | 0.019 | 0.003 | 0.007 | 0.009 | 0.02 | 0.025 | 0.027 | 0.015 | 0.023 | 0.025 |

| | | | | | | | | | | | | | | |
|----------|----------------------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| N | COPPER | Vc (m/min) | | | | | | | | | | | | |
| | Tungsten Copper (WCu) <700 | 110 | 0.016 | 0.021 | 0.023 | 0.006 | 0.011 | 0.013 | 0.026 | 0.031 | 0.033 | 0.021 | 0.026 | 0.028 |

| | | | | | | | | | | | | | | |
|----------|--------------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| P | STEEL | Vc (m/min) | | | | | | | | | | | | |
| 1.1 | unalloyed <500 | 190 | 0.018 | 0.025 | 0.027 | 0.008 | 0.015 | 0.017 | 0.03 | 0.037 | 0.039 | 0.025 | 0.032 | 0.034 |
| 1.2-1.5 | unalloyed <1100 | 180 | 0.018 | 0.025 | 0.027 | 0.008 | 0.015 | 0.017 | 0.03 | 0.037 | 0.039 | 0.025 | 0.032 | 0.034 |
| 2.1-2.2 | low-alloyed <950 | 170 | 0.017 | 0.023 | 0.024 | 0.007 | 0.013 | 0.015 | 0.028 | 0.035 | 0.037 | 0.023 | 0.03 | 0.032 |
| 2.3-2.4 | low-alloyed <1300 | 150 | 0.017 | 0.023 | 0.024 | 0.007 | 0.013 | 0.015 | 0.028 | 0.035 | 0.037 | 0.023 | 0.03 | 0.032 |
| 3.1-3.2 | high-alloyed <1100 | 150 | 0.016 | 0.021 | 0.023 | 0.006 | 0.011 | 0.013 | 0.026 | 0.032 | 0.034 | 0.021 | 0.027 | 0.029 |
| 3.3 | high-alloyed <1400 | 130 | 0.015 | 0.02 | 0.022 | 0.005 | 0.01 | 0.012 | 0.025 | 0.03 | 0.032 | 0.02 | 0.025 | 0.027 |



| | | | | | | | | | | | | | | |
|----------|--------------------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| K | CASTINGS | Vc (m/min) | | | | | | | | | | | | |
| 1.1-1.2 | Grey cast iron <1000 | 190 | 0.018 | 0.025 | 0.027 | 0.008 | 0.015 | 0.017 | 0.03 | 0.037 | 0.039 | 0.025 | 0.032 | 0.034 |
| 2.1-2.2 | Modular cast iron <850 | 180 | 0.017 | 0.023 | 0.025 | 0.007 | 0.013 | 0.015 | 0.028 | 0.035 | 0.037 | 0.023 | 0.03 | 0.032 |
| 3.1-3.2 | Malleable cast iron <800 | 170 | 0.017 | 0.023 | 0.025 | 0.007 | 0.013 | 0.015 | 0.028 | 0.035 | 0.037 | 0.023 | 0.03 | 0.032 |

Note | The values marked in turquoise are side applications!
 Values in the table are the shortest and the longest overhang length (L3) of each dimension;
 please calculate fz, ap and ae depending on the given values.  ae/ap(max) = 0.5x corner radius!

| | |
|-----------|----------------|
| Cooling | |
| Tolerance | d04 |
| Coating | AlphaDura Navy |

| | | |
|-------------|------------|--|
| Strategy | HSC | |
| Application | | |
| Features | HA | |

- Ultrafine carbide grade developed for machining hardened steels
 - Optimized face geometry for long tool life and highest dimensional accuracy
 - Reinforced core for milling up to 70 HRC
-
- Multipass milling of 3D contours
-
- Tolerance D1: -0.001/-0.006 mm
 - Tolerance D3: 0/-0.02 mm
 - Radius tolerance r: 0/-0.003 mm (measured from 0-90°)

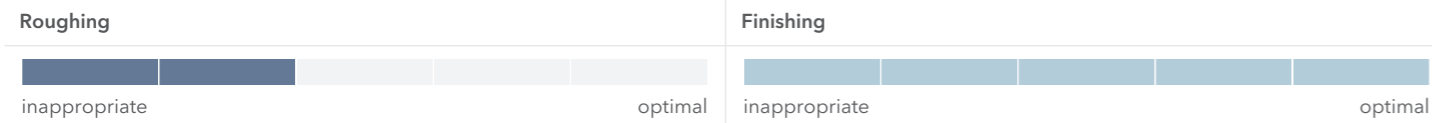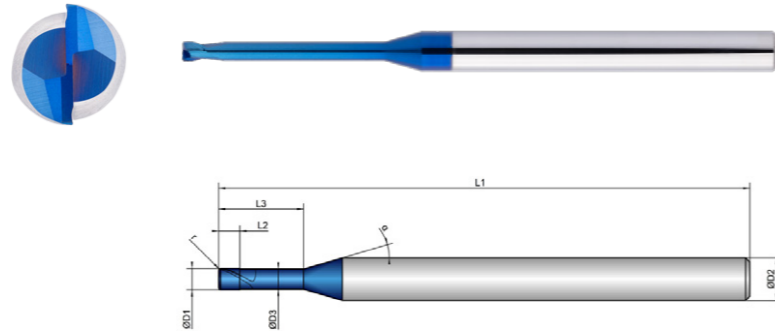

| K202092 | D1 mm Ø | D3 mm Ø | L2 mm | L3 mm | L1 mm | D2 mm Ø | z # | r mm | ° | α ° |
|---------|---------------|---------------|----------|----------|----------|---------------|--------|---------|----|--------|
| 0,8X4 | 0.8 | 0.78 | 0.8 | 4.0 | 50.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 0,8X6 | 0.8 | 0.78 | 0.8 | 6.0 | 50.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 1X2 | 1.0 | 0.95 | 1.0 | 2.0 | 50.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 1X4 | 1.0 | 0.95 | 1.0 | 4.0 | 50.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 1X6 | 1.0 | 0.95 | 1.0 | 6.0 | 50.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 1X8 | 1.0 | 0.95 | 1.0 | 8.0 | 50.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 1X10 | 1.0 | 0.95 | 1.0 | 10.0 | 50.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 1X12 | 1.0 | 0.95 | 1.0 | 12.0 | 54.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 1X16 | 1.0 | 0.95 | 1.0 | 16.0 | 60.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 1X20 | 1.0 | 0.95 | 1.0 | 20.0 | 60.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 1,2X6 | 1.2 | 1.14 | 1.2 | 6.0 | 50.0 | 4.0 | 2 | 0.20 | 30 | 16 |

| K202092 | D1 mm Ø | D3 mm Ø | L2 mm | L3 mm | L1 mm | D2 mm Ø | z # | r mm | ° | α ° |
|---------|---------------|---------------|----------|----------|----------|---------------|--------|---------|----|--------|
| 1,2X12 | 1.2 | 1.14 | 1.2 | 12.0 | 54.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 1,2X20 | 1.2 | 1.14 | 1.2 | 20.0 | 60.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 1,5X4 | 1.5 | 1.44 | 1.5 | 4.0 | 50.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 1,5X6 | 1.5 | 1.44 | 1.5 | 6.0 | 50.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 1,5X8 | 1.5 | 1.44 | 1.5 | 8.0 | 50.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 1,5X10 | 1.5 | 1.44 | 1.5 | 10.0 | 50.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 1,5X12 | 1.5 | 1.44 | 1.5 | 12.0 | 54.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 1,5X16 | 1.5 | 1.44 | 1.5 | 16.0 | 54.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 1,5X20 | 1.5 | 1.44 | 1.5 | 20.0 | 60.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 2X4 | 2.0 | 1.91 | 2.0 | 4.0 | 50.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 2X6 | 2.0 | 1.91 | 2.0 | 6.0 | 50.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 2X8 | 2.0 | 1.91 | 2.0 | 8.0 | 50.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 2X10 | 2.0 | 1.91 | 2.0 | 10.0 | 50.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 2X12 | 2.0 | 1.91 | 2.0 | 12.0 | 54.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 2X16 | 2.0 | 1.91 | 2.0 | 16.0 | 54.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 2X20 | 2.0 | 1.91 | 2.0 | 20.0 | 60.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 2X26 | 2.0 | 1.91 | 2.0 | 26.0 | 70.0 | 4.0 | 2 | 0.20 | 30 | 16 |

| Material | Hardness in HRC | Dimension Infeed in mm Application | Ø0.8x4 | | | Ø0.8x6 | | | Ø1x2 | | | Ø1x20 | | |
|----------|-----------------|--|---------------------|-----------------------|----------|---------------------|-----------------------|----------|---------------------|-----------------------|----------|----------------------|------------------------|-----------|
| | | | ae=1xD ap=0.05xD | ae=0.1xD ap=L2 max | ae=0.1xD | ae=1xD ap=0.05xD | ae=0.1xD ap=L2 max | ae=0.1xD | ae=1xD ap=0.05xD | ae=0.1xD ap=L2 max | ae=0.1xD | ae=1xD ap=0.005xD | ae=0.01xD ap=L2 max | ae=0.01xD |
| | | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| | | Vc (m/min) | | | | | | | | | | | | |
| H | HARDENED STEEL | | | | | | | | | | | | | |
| 1.1 | 46-55 | 110 | 0.014 | 0.017 | 0.019 | 0.014 | 0.017 | 0.019 | 0.015 | 0.02 | 0.022 | 0.007 | 0.01 | 0.012 |
| 1.2 | 56-60 | 70 | 0.013 | 0.016 | 0.018 | 0.013 | 0.016 | 0.018 | 0.014 | 0.019 | 0.021 | 0.006 | 0.009 | 0.011 |
| 1.3 | 60-65 | 50 | 0.012 | 0.015 | 0.017 | 0.012 | 0.015 | 0.017 | 0.012 | 0.017 | 0.019 | 0.005 | 0.008 | 0.01 |
| 1.4 | 66-70 | 40 | 0.011 | 0.014 | 0.016 | 0.011 | 0.014 | 0.016 | 0.011 | 0.016 | 0.018 | 0.004 | 0.007 | 0.009 |

| Material | Strength (N/mm ²) | Feed (mm/Z) | Strength (N/mm ²) | | | | | | | | | | | |
|----------|-------------------------------|-------------|-------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| M | STAINLESS STEEL | Vc (m/min) | | | | | | | | | | | | |
| 1.1 | ferritic/martensitic <850 | 90 | 0.015 | 0.018 | 0.02 | 0.015 | 0.018 | 0.02 | 0.016 | 0.021 | 0.023 | 0.006 | 0.011 | 0.013 |
| 2.1 | austenitic <650 | 75 | 0.014 | 0.017 | 0.019 | 0.014 | 0.017 | 0.019 | 0.015 | 0.02 | 0.022 | 0.005 | 0.01 | 0.012 |
| 2.2 | austenitic <750 | 70 | 0.013 | 0.016 | 0.018 | 0.013 | 0.016 | 0.018 | 0.013 | 0.018 | 0.02 | 0.004 | 0.008 | 0.01 |
| 3.1 | super austenitic <1100 | 50 | 0.012 | 0.015 | 0.017 | 0.012 | 0.015 | 0.017 | 0.012 | 0.017 | 0.019 | 0.003 | 0.007 | 0.009 |

| Material | Hardness in HRC | Feed (mm/Z) | Strength (N/mm ²) | | | | | | | | | | | |
|----------|----------------------------|-------------|-------------------------------|-------|------|-------|-------|------|-------|-------|-------|-------|-------|-------|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| N | COPPER | Vc (m/min) | | | | | | | | | | | | |
| | Tungsten Copper (WCu) <700 | 110 | 0.015 | 0.018 | 0.02 | 0.015 | 0.018 | 0.02 | 0.016 | 0.021 | 0.023 | 0.006 | 0.011 | 0.013 |

| Material | Hardness in HRC | Feed (mm/Z) | Strength (N/mm ²) | | | | | | | | | | | |
|----------|--------------------|-------------|-------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| P | STEEL | Vc (m/min) | | | | | | | | | | | | |
| 1.1 | unalloyed <500 | 190 | 0.017 | 0.022 | 0.024 | 0.017 | 0.022 | 0.024 | 0.018 | 0.025 | 0.027 | 0.008 | 0.015 | 0.017 |
| 1.2-1.5 | unalloyed <1100 | 180 | 0.017 | 0.022 | 0.024 | 0.017 | 0.022 | 0.024 | 0.018 | 0.025 | 0.027 | 0.008 | 0.015 | 0.017 |
| 2.1-2.2 | low-alloyed <950 | 170 | 0.016 | 0.02 | 0.022 | 0.016 | 0.02 | 0.022 | 0.017 | 0.023 | 0.024 | 0.007 | 0.013 | 0.015 |
| 2.3-2.4 | low-alloyed <1300 | 150 | 0.016 | 0.02 | 0.022 | 0.016 | 0.02 | 0.022 | 0.017 | 0.023 | 0.024 | 0.007 | 0.013 | 0.015 |
| 3.1-3.2 | high-alloyed <1100 | 150 | 0.015 | 0.018 | 0.02 | 0.015 | 0.018 | 0.02 | 0.016 | 0.021 | 0.023 | 0.006 | 0.011 | 0.013 |
| 3.3 | high-alloyed <1400 | 130 | 0.014 | 0.017 | 0.019 | 0.014 | 0.017 | 0.019 | 0.015 | 0.02 | 0.022 | 0.005 | 0.01 | 0.012 |

| Material | Hardness in HRC | Feed (mm/Z) | Strength (N/mm ²) | | | | | | | | | | | |
|----------|--------------------------|-------------|-------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| K | CASTINGS | Vc (m/min) | | | | | | | | | | | | |
| 1.1-1.2 | Grey cast iron <1000 | 190 | 0.017 | 0.022 | 0.024 | 0.017 | 0.022 | 0.024 | 0.018 | 0.025 | 0.027 | 0.008 | 0.015 | 0.017 |
| 2.1-2.2 | Modular cast iron <850 | 180 | 0.016 | 0.02 | 0.022 | 0.016 | 0.02 | 0.022 | 0.017 | 0.023 | 0.025 | 0.007 | 0.013 | 0.015 |
| 3.1-3.2 | Malleable cast iron <800 | 170 | 0.016 | 0.02 | 0.022 | 0.016 | 0.02 | 0.022 | 0.017 | 0.023 | 0.025 | 0.007 | 0.013 | 0.015 |

Note | The values marked in turquoise are side applications!
 Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values. ae/ap(max)=0.5x corner radius!

| Material | Hardness in HRC | Feed (mm/Z) | Ø1.2x6 | | | Ø1.2x20 | | | Ø1.5x4 | | | Ø1.5x20 | | |
|----------|-----------------|-------------|---------------------|-----------------------|----------|----------------------|------------------------|------------|---------------------|-----------------------|----------|---------------------|------------------------|-----------|
| | | | ae=1xD ap=0.05xD | ae=0.1xD ap=L2 max | ae=0.1xD | ae=1xD ap=0.008xD | ae=0.02xD ap=L2 max | ae=0.015xD | ae=1xD ap=0.05xD | ae=0.1xD ap=L2 max | ae=0.1xD | ae=1xD ap=0.02xD | ae=0.04xD ap=L2 max | ae=0.04xD |
| | | Vc (m/min) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| H | HARDENED STEEL | | | | | | | | | | | | | |
| 1.1 | 46-55 | 110 | 0.015 | 0.02 | 0.022 | 0.01 | 0.015 | 0.017 | 0.017 | 0.022 | 0.024 | 0.01 | 0.015 | 0.017 |
| 1.2 | 56-60 | 70 | 0.014 | 0.019 | 0.021 | 0.009 | 0.014 | 0.016 | 0.016 | 0.021 | 0.022 | 0.009 | 0.014 | 0.016 |
| 1.3 | 60-65 | 50 | 0.012 | 0.017 | 0.019 | 0.007 | 0.012 | 0.014 | 0.014 | 0.019 | 0.02 | 0.007 | 0.012 | 0.014 |
| 1.4 | 66-70 | 40 | 0.011 | 0.016 | 0.018 | 0.006 | 0.011 | 0.013 | 0.013 | 0.018 | 0.019 | 0.006 | 0.011 | 0.013 |

| Material | Strength (N/mm ²) | Feed (mm/Z) | Strength (N/mm ²) | | | | | | | | | | | |
|----------|-------------------------------|-------------|-------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| M | STAINLESS STEEL | Vc (m/min) | | | | | | | | | | | | |
| 1.1 | ferritic/martensitic <850 | 90 | 0.016 | 0.021 | 0.023 | 0.011 | 0.016 | 0.018 | 0.018 | 0.023 | 0.025 | 0.011 | 0.016 | 0.018 |
| 2.1 | austenitic <650 | 75 | 0.015 | 0.02 | 0.022 | 0.01 | 0.015 | 0.017 | 0.017 | 0.022 | 0.024 | 0.01 | 0.015 | 0.017 |
| 2.2 | austenitic <750 | 70 | 0.013 | 0.018 | 0.02 | 0.008 | 0.013 | 0.015 | 0.015 | 0.02 | 0.022 | 0.008 | 0.013 | 0.015 |
| 3.1 | super austenitic <1100 | 50 | 0.012 | 0.017 | 0.019 | 0.007 | 0.012 | 0.014 | 0.014 | 0.019 | 0.021 | 0.007 | 0.012 | 0.014 |

| Material | Hardness in HRC | Feed (mm/Z) | Strength (N/mm ²) | | | | | | | | | | | |
|----------|----------------------------|-------------|-------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| N | COPPER | Vc (m/min) | | | | | | | | | | | | |
| | Tungsten Copper (WCu) <700 | 110 | 0.016 | 0.021 | 0.023 | 0.011 | 0.016 | 0.018 | 0.018 | 0.023 | 0.025 | 0.011 | 0.016 | 0.018 |

| Material | Hardness in HRC | Feed (mm/Z) | Strength (N/mm ²) | | | | | | | | | | | |
|----------|--------------------|-------------|-------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| P | STEEL | Vc (m/min) | | | | | | | | | | | | |
| 1.1 | unalloyed <500 | 190 | 0.02 | 0.025 | 0.027 | 0.015 | 0.02 | 0.022 | 0.022 | 0.027 | 0.029 | 0.015 | 0.02 | 0.022 |
| 1.2-1.5 | unalloyed <1100 | 180 | 0.02 | 0.025 | 0.027 | 0.015 | 0.02 | 0.022 | 0.022 | 0.027 | 0.029 | 0.015 | 0.02 | 0.022 |
| 2.1-2.2 | low-alloyed <950 | 170 | 0.018 | 0.023 | 0.025 | 0.013 | 0.018 | 0.02 | 0.02 | 0.025 | 0.027 | 0.013 | 0.018 | 0.02 |
| 2.3-2.4 | low-alloyed <1300 | 150 | 0.018 | 0.023 | 0.025 | 0.013 | 0.018 | 0.02 | 0.02 | 0.025 | 0.027 | 0.013 | 0.018 | 0.02 |
| 3.1-3.2 | high-alloyed <1100 | 150 | 0.016 | 0.021 | 0.023 | 0.011 | 0.016 | 0.018 | 0.018 | 0.023 | 0.025 | 0.011 | 0.016 | 0.018 |
| 3.3 | high-alloyed <1400 | 130 | 0.015 | 0.02 | 0.022 | 0.01 | 0.015 | 0.017 | 0.017 | 0.022 | 0.024 | 0.01 | 0.015 | 0.017 |

| Material | Hardness in HRC | Feed (mm/Z) | Strength (N/mm ²) | | | | | | | | | | | |
|----------|--------------------------|-------------|-------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| K | CASTINGS | Vc (m/min) | | | | | | | | | | | | |
| 1.1-1.2 | Grey cast iron <1000 | 190 | 0.02 | 0.025 | 0.027 | 0.015 | 0.02 | 0.022 | 0.022 | 0.027 | 0.029 | 0.015 | 0.02 | 0.022 |
| 2.1-2.2 | Modular cast iron <850 | 180 | 0.018 | 0.023 | 0.025 | 0.013 | 0.018 | 0.02 | 0.02 | 0.025 | 0.027 | 0.013 | 0.018 | 0.02 |
| 3.1-3.2 | Malleable cast iron <800 | 170 | 0.018 | 0.023 | 0.025 | 0.013 | 0.018 | 0.02 | 0.02 | 0.025 | 0.027 | 0.013 | 0.018 | 0.02 |

Note | The values marked in turquoise are side applications!
 Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values. ae/ap(max)=0.5x corner radius!

| Dimension | Ø2x4 | | | Ø2x26 | | |
|--------------|------------|------------|-----------|------------|------------|------------|
| Infeed in mm | ae= 1xD | ae= 0.1xD | ae= 0.1xD | ae= 1xD | ae= 0.06xD | ae= 0.05xD |
| Application | ap= 0.05xD | ap= L2 max | ap= 0.1xD | ap= 0.03xD | ap= L2 max | ap= 0.05xD |
| Application | | | | | | |

| Material | Hardness in HRC | Feed (mm/Z) | fz | fz | fz | fz | fz | fz |
|-------------------------|-----------------|-------------------|-------|-------|-------|-------|-------|-------|
| H HARDENED STEEL | | Vc (m/min) | | | | | | |
| 1.1 | 46-55 | 110 | 0.025 | 0.03 | 0.032 | 0.02 | 0.025 | 0.027 |
| 1.2 | 56-60 | 70 | 0.023 | 0.028 | 0.03 | 0.019 | 0.024 | 0.026 |
| 1.3 | 60-65 | 50 | 0.021 | 0.026 | 0.028 | 0.018 | 0.023 | 0.025 |
| 1.4 | 66-70 | 40 | 0.019 | 0.025 | 0.027 | 0.017 | 0.022 | 0.024 |

| Material | Strength (N/mm²) | Feed (mm/Z) | fz | fz | fz | fz | fz | fz |
|--------------------------|---------------------------------------|-------------------|-------|-------|-------|-------|-------|-------|
| M STAINLESS STEEL | | Vc (m/min) | | | | | | |
| 1.1 | ferritic/martensitic <850 | 90 | 0.026 | 0.031 | 0.033 | 0.021 | 0.026 | 0.028 |
| 2.1 | austenitic <650 | 75 | 0.024 | 0.029 | 0.031 | 0.019 | 0.025 | 0.027 |
| 2.2 | austenitic <750 | 70 | 0.022 | 0.027 | 0.029 | 0.017 | 0.024 | 0.026 |
| 3.1 | DUPLEX STEEL super austenitic <1100 | 50 | 0.02 | 0.025 | 0.027 | 0.015 | 0.023 | 0.025 |

| Material | Feed (mm/Z) | fz | fz | fz | fz | fz | fz |
|----------------------------|-------------------|-------|-------|-------|-------|-------|-------|
| N COPPER | Vc (m/min) | | | | | | |
| Tungsten Copper (WCu) <700 | 110 | 0.026 | 0.031 | 0.033 | 0.021 | 0.026 | 0.028 |

| Material | Feed (mm/Z) | fz | fz | fz | fz | fz | fz |
|----------------------------|-------------------|-------|-------|-------|-------|-------|-------|
| P STEEL | Vc (m/min) | | | | | | |
| 1.1 unalloyed <500 | 190 | 0.03 | 0.037 | 0.039 | 0.025 | 0.032 | 0.034 |
| 1.2-1.5 unalloyed <1100 | 180 | 0.03 | 0.037 | 0.039 | 0.025 | 0.032 | 0.034 |
| 2.1-2.2 low-alloyed <950 | 170 | 0.028 | 0.035 | 0.037 | 0.023 | 0.03 | 0.032 |
| 2.3-2.4 low-alloyed <1300 | 150 | 0.028 | 0.035 | 0.037 | 0.023 | 0.03 | 0.032 |
| 3.1-3.2 high-alloyed <1100 | 150 | 0.026 | 0.032 | 0.034 | 0.021 | 0.027 | 0.029 |
| 3.3 high-alloyed <1400 | 130 | 0.025 | 0.03 | 0.032 | 0.02 | 0.025 | 0.027 |



| Material | Feed (mm/Z) | fz | fz | fz | fz | fz | fz |
|----------------------------------|-------------------|-------|-------|-------|-------|-------|-------|
| K CASTINGS | Vc (m/min) | | | | | | |
| 1.1-1.2 Grey cast iron <1000 | 190 | 0.03 | 0.037 | 0.039 | 0.025 | 0.032 | 0.034 |
| 2.1-2.2 Modular cast iron <850 | 180 | 0.028 | 0.035 | 0.037 | 0.023 | 0.03 | 0.032 |
| 3.1-3.2 Malleable cast iron <800 | 170 | 0.028 | 0.035 | 0.037 | 0.023 | 0.03 | 0.032 |

Note | The values marked in turquoise are side applications!
 Values in the table are the shortest and the longest overhang length (L3) of each dimension;
 please calculate fz, ap and ae depending on the given values.
 ae/ap(max) = 0.5x corner radius!

| | |
|-----------|----------------|
| Cooling | |
| Tolerance | d04 |
| Coating | AlphaDura Navy |

| | | |
|-------------|------------|--|
| Strategy | HSC | |
| Application | | |
| Features | HA | |

- Ultrafine carbide grade developed for machining hardened steels
 - Optimized face geometry for long tool life and highest dimensional accuracy
 - Reinforced core for milling up to 70 HRC
-
- Multipass milling of 3D contours
-
- Tolerance D1: -0.001/-0.006 mm
 - Tolerance D3: 0/-0.02 mm
 - Radius tolerance r: 0/-0.003 mm (measured from 0-90°)

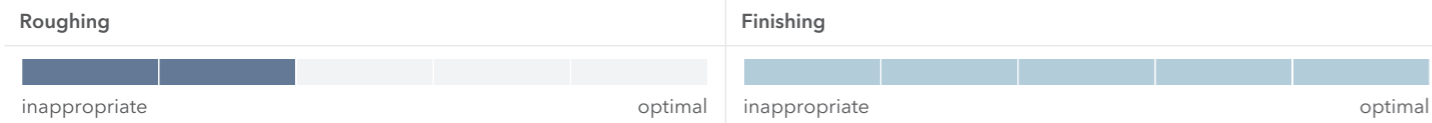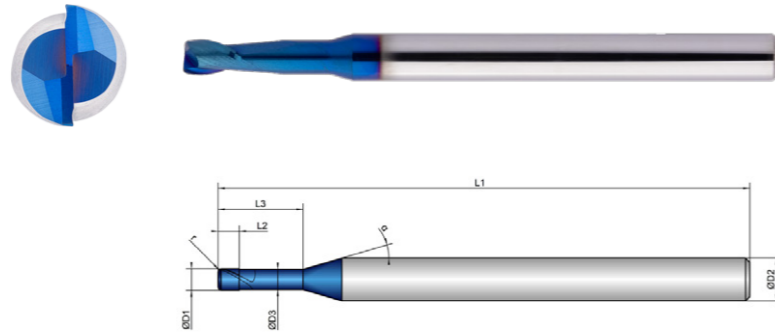

| K202102 | D1 mm Ø | D3 mm Ø | L2 mm | L3 mm | L1 mm | D2 mm Ø | z # | r mm | ° | α ° |
|---------|---------------|---------------|----------|----------|----------|---------------|--------|---------|----|--------|
| 1X2 | 1.0 | 0.95 | 1.0 | 2.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 1X4 | 1.0 | 0.95 | 1.0 | 4.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 1X6 | 1.0 | 0.95 | 1.0 | 6.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 1X8 | 1.0 | 0.95 | 1.0 | 8.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 1X10 | 1.0 | 0.95 | 1.0 | 10.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 1X12 | 1.0 | 0.95 | 1.0 | 12.0 | 54.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 1X16 | 1.0 | 0.95 | 1.0 | 16.0 | 60.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 1X20 | 1.0 | 0.95 | 1.0 | 20.0 | 60.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 1,2X6 | 1.2 | 1.14 | 1.2 | 6.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 1,2X12 | 1.2 | 1.14 | 1.2 | 12.0 | 54.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 1,2X20 | 1.2 | 1.14 | 1.2 | 20.0 | 60.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 1,5X4 | 1.5 | 1.44 | 1.5 | 4.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |

| K202102 | D1 mm Ø | D3 mm Ø | L2 mm | L3 mm | L1 mm | D2 mm Ø | z # | r mm | ° | α ° |
|---------|---------------|---------------|----------|----------|----------|---------------|--------|---------|----|--------|
| 1,5X6 | 1.5 | 1.44 | 1.5 | 6.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 1,5X8 | 1.5 | 1.44 | 1.5 | 8.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 1,5X10 | 1.5 | 1.44 | 1.5 | 10.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 1,5X12 | 1.5 | 1.44 | 1.5 | 12.0 | 54.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 1,5X16 | 1.5 | 1.44 | 1.5 | 16.0 | 54.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 1,5X20 | 1.5 | 1.44 | 1.5 | 20.0 | 60.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 2X4 | 2.0 | 1.91 | 2.0 | 4.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 2X6 | 2.0 | 1.91 | 2.0 | 6.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 2X8 | 2.0 | 1.91 | 2.0 | 8.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 2X10 | 2.0 | 1.91 | 2.0 | 10.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 2X12 | 2.0 | 1.91 | 2.0 | 12.0 | 54.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 2X16 | 2.0 | 1.91 | 2.0 | 16.0 | 54.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 2X20 | 2.0 | 1.91 | 2.0 | 20.0 | 60.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 2X26 | 2.0 | 1.91 | 2.0 | 26.0 | 70.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 2,5X10 | 2.5 | 2.41 | 2.5 | 10.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 2,5X12 | 2.5 | 2.41 | 2.5 | 12.0 | 60.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 2,5X30 | 2.5 | 2.41 | 2.5 | 30.0 | 70.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 3X10 | 3.0 | 2.92 | 4.5 | 10.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 3X12 | 3.0 | 2.92 | 4.5 | 12.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 3X30 | 3.0 | 2.92 | 4.5 | 30.0 | 70.0 | 4.0 | 2 | 0.30 | 30 | 16 |

| | Material | Hardness in HRC | Feed (mm/Z) | Ø1x2 | | | Ø1x20 | | | Ø1.2x6 | | | Ø1.2x20 | | |
|---------|---------------------------------|--------------------|-------------------|---------------|---------------|--------------|----------------|---------------|---------------|---------------|---------------|--------------|----------------|---------------|----------------|
| | | | | ae= 1xD | ae= 0.1xD | ae= 0.1xD | ae= 1xD | ae= 0.01xD | ae= 0.01xD | ae= 1xD | ae= 0.1xD | ae= 0.1xD | ae= 1xD | ae= 0.02xD | ae= 0.015xD |
| | | | | ap= 0.05xD | ap= L2 max | ap= 0.1xD | ap= 0.005xD | ap= L2 max | ap= 0.01xD | ap= 0.05xD | ap= L2 max | ap= 0.1xD | ap= 0.008xD | ap= L2 max | ap= 0.015xD |
| | | | | | | | | | | | | | | | |
| H | HARDENED STEEL | | Vc (m/min) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 1.1 | | 46-55 | 110 | 0.015 | 0.02 | 0.022 | 0.007 | 0.01 | 0.012 | 0.015 | 0.02 | 0.022 | 0.01 | 0.015 | 0.017 |
| 1.2 | | 56-60 | 70 | 0.014 | 0.019 | 0.021 | 0.006 | 0.009 | 0.011 | 0.014 | 0.019 | 0.021 | 0.009 | 0.014 | 0.016 |
| 1.3 | | 60-65 | 50 | 0.012 | 0.017 | 0.019 | 0.005 | 0.008 | 0.01 | 0.012 | 0.017 | 0.019 | 0.007 | 0.012 | 0.014 |
| 1.4 | | 66-70 | 40 | 0.011 | 0.016 | 0.018 | 0.004 | 0.007 | 0.009 | 0.011 | 0.016 | 0.018 | 0.006 | 0.011 | 0.013 |
| M | STAINLESS STEEL | | Vc (m/min) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 1.1 | ferritic/martensitic | <850 | 90 | 0.016 | 0.021 | 0.023 | 0.006 | 0.011 | 0.013 | 0.016 | 0.021 | 0.023 | 0.011 | 0.016 | 0.018 |
| 2.1 | austenitic | <650 | 75 | 0.015 | 0.02 | 0.022 | 0.005 | 0.01 | 0.012 | 0.015 | 0.02 | 0.022 | 0.01 | 0.015 | 0.017 |
| 2.2 | austenitic | <750 | 70 | 0.013 | 0.018 | 0.02 | 0.004 | 0.008 | 0.01 | 0.013 | 0.018 | 0.02 | 0.008 | 0.013 | 0.015 |
| 3.1 | DUPLEX STEEL super austenitic | <1100 | 50 | 0.012 | 0.017 | 0.019 | 0.003 | 0.007 | 0.009 | 0.012 | 0.017 | 0.019 | 0.007 | 0.012 | 0.014 |
| N | COPPER | | Vc (m/min) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| | Tungsten Copper (WCu) | <700 | 110 | 0.016 | 0.021 | 0.023 | 0.006 | 0.011 | 0.013 | 0.016 | 0.021 | 0.023 | 0.011 | 0.016 | 0.018 |
| P | STEEL | | Vc (m/min) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 1.1 | unalloyed | <500 | 190 | 0.018 | 0.025 | 0.027 | 0.008 | 0.015 | 0.017 | 0.02 | 0.025 | 0.027 | 0.015 | 0.02 | 0.022 |
| 1.2-1.5 | unalloyed | <1100 | 180 | 0.018 | 0.025 | 0.027 | 0.008 | 0.015 | 0.017 | 0.02 | 0.025 | 0.027 | 0.015 | 0.02 | 0.022 |
| 2.1-2.2 | low-alloyed | <950 | 170 | 0.017 | 0.023 | 0.024 | 0.007 | 0.013 | 0.015 | 0.018 | 0.023 | 0.025 | 0.013 | 0.018 | 0.02 |
| 2.3-2.4 | low-alloyed | <1300 | 150 | 0.017 | 0.023 | 0.024 | 0.007 | 0.013 | 0.015 | 0.018 | 0.023 | 0.025 | 0.013 | 0.018 | 0.02 |
| 3.1-3.2 | high-alloyed | <1100 | 150 | 0.016 | 0.021 | 0.023 | 0.006 | 0.011 | 0.013 | 0.016 | 0.021 | 0.023 | 0.011 | 0.016 | 0.018 |
| 3.3 | high-alloyed | <1400 | 130 | 0.015 | 0.02 | 0.022 | 0.005 | 0.01 | 0.012 | 0.015 | 0.02 | 0.022 | 0.01 | 0.015 | 0.017 |
| K | CASTINGS | | Vc (m/min) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 1.1-1.2 | Grey cast iron | <1000 | 190 | 0.018 | 0.025 | 0.027 | 0.008 | 0.015 | 0.017 | 0.02 | 0.025 | 0.027 | 0.015 | 0.02 | 0.022 |
| 2.1-2.2 | Modular cast iron | <850 | 180 | 0.017 | 0.023 | 0.025 | 0.007 | 0.013 | 0.015 | 0.018 | 0.023 | 0.025 | 0.013 | 0.018 | 0.02 |
| 3.1-3.2 | Malleable cast iron | <800 | 170 | 0.017 | 0.023 | 0.025 | 0.007 | 0.013 | 0.015 | 0.018 | 0.023 | 0.025 | 0.013 | 0.018 | 0.02 |

Note | The values marked in turquoise are side applications!
Values in the table are the shortest and the longest overhang length (L3) of each dimension;
please calculate fz, ap and ae depending on the given values. ae/ap(max) = 0.5x corner radius!

| | Material | Hardness in HRC | Feed (mm/Z) | Ø1.5x4 | | | Ø1.5x20 | | | Ø2x4 | | | Ø2x26 | | | |
|---------|---------------------------------|--------------------|-------------------|---------------|---------------|--------------|---------------|---------------|---------------|---------------|---------------|---------------|--------------|---------------|---------------|---------------|
| | | | | ae= 1xD | ae= 0.1xD | ae= 0.1xD | ae= 1xD | ae= 0.04xD | ae= 0.04xD | ae= 1xD | ae= 0.1xD | ae= 0.1xD | ae= 1xD | ae= 0.06xD | ae= 0.05xD | |
| | | | | ap= 0.05xD | ap= L2 max | ap= 0.1xD | ap= 0.02xD | ap= L2 max | ap= 0.04xD | ap= 0.05xD | ap= 0.05xD | ap= L2 max | ap= 0.1xD | ap= 0.03xD | ap= L2 max | ap= 0.05xD |
| | | | | | | | | | | | | | | | | |
| H | HARDENED STEEL | | Vc (m/min) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| 1.1 | | 46-55 | 110 | 0.017 | 0.022 | 0.024 | 0.01 | 0.015 | 0.017 | 0.025 | 0.03 | 0.032 | 0.02 | 0.025 | 0.027 | |
| 1.2 | | 56-60 | 70 | 0.016 | 0.021 | 0.022 | 0.009 | 0.014 | 0.016 | 0.023 | 0.028 | 0.03 | 0.019 | 0.024 | 0.026 | |
| 1.3 | | 60-65 | 50 | 0.014 | 0.019 | 0.02 | 0.007 | 0.012 | 0.014 | 0.021 | 0.026 | 0.028 | 0.018 | 0.023 | 0.025 | |
| 1.4 | | 66-70 | 40 | 0.013 | 0.018 | 0.019 | 0.006 | 0.011 | 0.013 | 0.019 | 0.025 | 0.027 | 0.017 | 0.022 | 0.024 | |
| M | STAINLESS STEEL | | Vc (m/min) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| 1.1 | ferritic/martensitic | <850 | 90 | 0.018 | 0.023 | 0.025 | 0.011 | 0.016 | 0.018 | 0.026 | 0.031 | 0.033 | 0.021 | 0.026 | 0.028 | |
| 2.1 | austenitic | <650 | 75 | 0.017 | 0.022 | 0.024 | 0.01 | 0.015 | 0.017 | 0.024 | 0.029 | 0.031 | 0.019 | 0.025 | 0.027 | |
| 2.2 | austenitic | <750 | 70 | 0.015 | 0.02 | 0.022 | 0.008 | 0.013 | 0.015 | 0.022 | 0.027 | 0.029 | 0.017 | 0.024 | 0.026 | |
| 3.1 | DUPLEX STEEL super austenitic | <1100 | 50 | 0.014 | 0.019 | 0.021 | 0.007 | 0.012 | 0.014 | 0.02 | 0.025 | 0.027 | 0.015 | 0.023 | 0.025 | |
| N | COPPER | | Vc (m/min) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| | Tungsten Copper (WCu) | <700 | 110 | 0.018 | 0.023 | 0.025 | 0.011 | 0.016 | 0.018 | 0.026 | 0.031 | 0.033 | 0.021 | 0.026 | 0.028 | |
| P | STEEL | | Vc (m/min) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| 1.1 | unalloyed | <500 | 190 | 0.022 | 0.027 | 0.029 | 0.015 | 0.02 | 0.022 | 0.03 | 0.037 | 0.039 | 0.025 | 0.032 | 0.034 | |
| 1.2-1.5 | unalloyed | <1100 | 180 | 0.022 | 0.027 | 0.029 | 0.015 | 0.02 | 0.022 | 0.03 | 0.037 | 0.039 | 0.025 | 0.032 | 0.034 | |
| 2.1-2.2 | low-alloyed | <950 | 170 | 0.02 | 0.025 | 0.027 | 0.013 | 0.018 | 0.02 | 0.028 | 0.035 | 0.037 | 0.023 | 0.03 | 0.032 | |
| 2.3-2.4 | low-alloyed | <1300 | 150 | 0.02 | 0.025 | 0.027 | 0.013 | 0.018 | 0.02 | 0.028 | 0.035 | 0.037 | 0.023 | 0.03 | 0.032 | |
| 3.1-3.2 | high-alloyed | <1100 | 150 | 0.018 | 0.023 | 0.025 | 0.011 | 0.016 | 0.018 | 0.026 | 0.032 | 0.034 | 0.021 | 0.027 | 0.029 | |
| 3.3 | high-alloyed | <1400 | 130 | 0.017 | 0.022 | 0.024 | 0.01 | 0.015 | 0.017 | 0.025 | 0.03 | 0.032 | 0.02 | 0.025 | 0.027 | |
| K | CASTINGS | | Vc (m/min) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | |
| 1.1-1.2 | Grey cast iron | <1000 | 190 | 0.022 | 0.027 | 0.029 | 0.015 | 0.02 | 0.022 | 0.03 | 0.037 | 0.039 | 0.025 | 0.032 | 0.034 | |
| 2.1-2.2 | Modular cast iron | <850 | 180 | 0.02 | 0.025 | 0.027 | 0.013 | 0.018 | 0.02 | 0.028 | 0.035 | 0.037 | 0.023 | 0.03 | 0.032 | |
| 3.1-3.2 | Malleable cast iron | <800 | 170 | 0.02 | 0.025 | 0.027 | 0.013 | 0.018 | 0.02 | 0.028 | 0.035 | 0.037 | 0.023 | 0.03 | 0.032 | |

Note | The values marked in turquoise are side applications!
Values in the table are the shortest and the longest overhang length (L3) of each dimension;
please calculate fz, ap and ae depending on the given values. ae/ap(max) = 0.5x corner radius!



| Material | Hardness in HRC | Dimension | Ø2.5x10 | | | Ø2.5x30 | | | Ø3x10 | | | Ø3x30 | | |
|-------------|---------------------------------------|-------------------|---|-----------|----------|-----------|-----------|-----------|-----------|-----------|----------|-----------|-----------|-----------|
| | | | ae=1xD | ae=0.1xD | ae=0.1xD | ae=1xD | ae=0.04xD | ae=0.04xD | ae=1xD | ae=0.1xD | ae=0.1xD | ae=1xD | ae=0.05xD | ae=0.05xD |
| | | Infeed in mm | ap=0.05xD | ap=L2 max | ap=0.1xD | ap=0.02xD | ap=L2 max | ap=0.04xD | ap=0.05xD | ap=L2 max | ap=0.1xD | ap=0.03xD | ap=L2 max | ap=0.05xD |
| | | Application | | | | | | | | | | | | |
| | | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | | | |
| 1.1 | 46-55 | 110 | 0.025 | 0.03 | 0.032 | 0.02 | 0.025 | 0.027 | 0.027 | 0.032 | 0.034 | 0.017 | 0.022 | 0.024 |
| 1.2 | 56-60 | 70 | 0.023 | 0.028 | 0.03 | 0.019 | 0.024 | 0.026 | 0.025 | 0.03 | 0.032 | 0.015 | 0.02 | 0.022 |
| 1.3 | 60-65 | 50 | 0.021 | 0.026 | 0.028 | 0.018 | 0.023 | 0.025 | 0.023 | 0.028 | 0.03 | 0.013 | 0.018 | 0.02 |
| 1.4 | 66-70 | 40 | 0.019 | 0.025 | 0.027 | 0.017 | 0.022 | 0.024 | 0.021 | 0.026 | 0.028 | 0.011 | 0.016 | 0.018 |
| M | STAINLESS STEEL | Vc (m/min) | | | | | | | | | | | | |
| 1.1 | ferritic/martensitic <850 | 90 | 0.026 | 0.031 | 0.033 | 0.021 | 0.026 | 0.028 | 0.028 | 0.033 | 0.034 | 0.018 | 0.023 | 0.025 |
| 2.1 | austenitic <650 | 75 | 0.024 | 0.029 | 0.031 | 0.019 | 0.024 | 0.026 | 0.026 | 0.031 | 0.033 | 0.016 | 0.021 | 0.023 |
| 2.2 | austenitic <750 | 70 | 0.022 | 0.027 | 0.029 | 0.017 | 0.022 | 0.024 | 0.024 | 0.029 | 0.031 | 0.014 | 0.019 | 0.021 |
| 3.1 | DUPLEX STEEL super austenitic <1100 | 50 | 0.02 | 0.026 | 0.028 | 0.016 | 0.02 | 0.022 | 0.022 | 0.027 | 0.029 | 0.012 | 0.017 | 0.019 |
| N | COPPER | Vc (m/min) | | | | | | | | | | | | |
| | Tungsten Copper (WCu) <700 | 110 | 0.026 | 0.031 | 0.033 | 0.021 | 0.026 | 0.028 | 0.028 | 0.033 | 0.034 | 0.018 | 0.023 | 0.025 |
| P | STEEL | Vc (m/min) | | | | | | | | | | | | |
| 1.1 | unalloyed <500 | 190 | 0.03 | 0.036 | 0.038 | 0.025 | 0.031 | 0.033 | 0.032 | 0.038 | 0.04 | 0.022 | 0.028 | 0.03 |
| 1.2-1.5 | unalloyed <1100 | 180 | 0.03 | 0.036 | 0.038 | 0.025 | 0.031 | 0.033 | 0.032 | 0.038 | 0.04 | 0.022 | 0.028 | 0.03 |
| 2.1-2.2 | low-alloyed <950 | 170 | 0.028 | 0.034 | 0.036 | 0.023 | 0.029 | 0.031 | 0.03 | 0.036 | 0.038 | 0.02 | 0.026 | 0.028 |
| 2.3-2.4 | low-alloyed <1300 | 150 | 0.028 | 0.034 | 0.036 | 0.023 | 0.029 | 0.031 | 0.03 | 0.036 | 0.038 | 0.02 | 0.026 | 0.028 |
| 3.1-3.2 | high-alloyed <1100 | 150 | 0.026 | 0.031 | 0.033 | 0.021 | 0.026 | 0.028 | 0.028 | 0.033 | 0.035 | 0.018 | 0.023 | 0.025 |
| 3.3 | high-alloyed <1400 | 130 | 0.025 | 0.03 | 0.032 | 0.02 | 0.025 | 0.027 | 0.027 | 0.032 | 0.034 | 0.017 | 0.022 | 0.024 |
| K | CASTINGS | Vc (m/min) | | | | | | | | | | | | |
| 1.1-1.2 | Grey cast iron <1000 | 190 | 0.03 | 0.036 | 0.038 | 0.025 | 0.031 | 0.033 | 0.032 | 0.038 | 0.04 | 0.022 | 0.028 | 0.03 |
| 2.1-2.2 | Modular cast iron <850 | 180 | 0.028 | 0.034 | 0.036 | 0.023 | 0.029 | 0.031 | 0.03 | 0.036 | 0.038 | 0.02 | 0.028 | 0.028 |
| 3.1-3.2 | Malleable cast iron <800 | 170 | 0.028 | 0.034 | 0.036 | 0.023 | 0.029 | 0.031 | 0.03 | 0.036 | 0.038 | 0.02 | 0.026 | 0.028 |
| Note | | | The values marked in turquoise are side applications! Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values. ae/ap(max)=0.5x corner radius! | | | | | | | | | | | |



| | |
|-----------|----------------|
| Cooling | |
| Tolerance | d04 |
| Coating | AlphaDura Navy |

| | | |
|-------------|------------|--|
| Strategy | HSC | |
| Application | | |
| Features | HA | |

- Ultrafine carbide grade developed for machining hardened steels
 - Optimized face geometry for long tool life and highest dimensional accuracy
 - Reinforced core for milling up to 70 HRC
-
- Multipass milling of 3D contours
-
- Tolerance D1: -0.001/-0.006 mm
 - Tolerance D3: 0/-0.02 mm
 - Radius tolerance r: 0/-0.003 mm (measured from 0-90°)

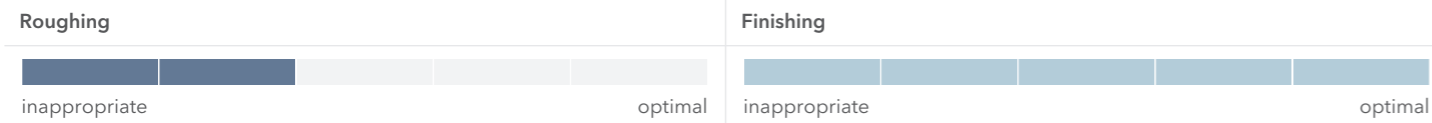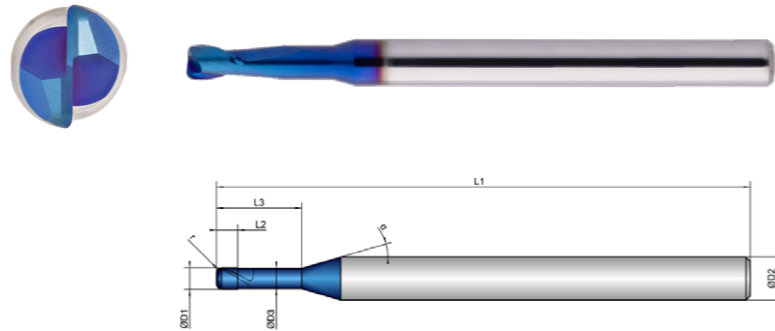

| K202112 | D1 mm ∅ | D3 mm ∅ | L2 mm | L3 mm | L1 mm | D2 mm ∅ | z # | r mm | ° | α ° |
|---------|---------------|---------------|----------|----------|----------|---------------|--------|---------|----|--------|
| 1,5X4 | 1.5 | 1.44 | 1.5 | 4.0 | 50.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1,5X6 | 1.5 | 1.44 | 1.5 | 6.0 | 50.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1,5X8 | 1.5 | 1.44 | 1.5 | 8.0 | 50.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1,5X10 | 1.5 | 1.44 | 1.5 | 10.0 | 50.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1,5X12 | 1.5 | 1.44 | 1.5 | 12.0 | 54.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1,5X16 | 1.5 | 1.44 | 1.5 | 16.0 | 54.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1,5X20 | 1.5 | 1.44 | 1.5 | 20.0 | 60.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 2X4 | 2.0 | 1.91 | 2.0 | 4.0 | 50.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 2X6 | 2.0 | 1.91 | 2.0 | 6.0 | 50.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 2X8 | 2.0 | 1.91 | 2.0 | 8.0 | 50.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 2X10 | 2.0 | 1.91 | 2.0 | 10.0 | 50.0 | 4.0 | 2 | 0.50 | 30 | 16 |

| K202112 | D1 mm ∅ | D3 mm ∅ | L2 mm | L3 mm | L1 mm | D2 mm ∅ | z # | r mm | ° | α ° |
|---------|---------------|---------------|----------|----------|----------|---------------|--------|---------|----|--------|
| 2X12 | 2.0 | 1.91 | 2.0 | 12.0 | 54.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 2X16 | 2.0 | 1.91 | 2.0 | 16.0 | 54.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 2X20 | 2.0 | 1.91 | 2.0 | 20.0 | 60.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 2X26 | 2.0 | 1.91 | 2.0 | 26.0 | 70.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 2,5X10 | 2.5 | 2.41 | 2.5 | 10.0 | 50.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 2,5X12 | 2.5 | 2.41 | 2.5 | 12.0 | 60.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 2,5X30 | 2.5 | 2.41 | 2.5 | 30.0 | 70.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 3X10 | 3.0 | 2.91 | 4.5 | 10.0 | 50.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 3X12 | 3.0 | 2.91 | 4.5 | 12.0 | 50.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 3X30 | 3.0 | 2.91 | 4.5 | 30.0 | 70.0 | 4.0 | 2 | 0.50 | 30 | 16 |

| Material | Hardness in HRC | Dimension | Infeed in mm | Ø1.5x4 | | | Ø1.5x20 | | | Ø2x4 | | | Ø2x26 | | |
|----------|-----------------|-------------|--------------|----------|-----------------------|-------------------|---------|-----------|-----------|--------|----------|----------|--------|-----------|-----------|
| | | | | ae=1xD | ae=0.1xD | ae=0.1xD | ae=1xD | ae=0.04xD | ae=0.04xD | ae=1xD | ae=0.1xD | ae=0.1xD | ae=1xD | ae=0.05xD | ae=0.05xD |
| Material | Hardness in HRC | Feed (mm/Z) | Application | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| | | | | H | HARDENED STEEL | Vc (m/min) | | | | | | | | | |
| 1.1 | 46-55 | 110 | | 0.017 | 0.022 | 0.024 | 0.01 | 0.015 | 0.017 | 0.025 | 0.03 | 0.032 | 0.02 | 0.025 | 0.027 |
| 1.2 | 56-60 | 70 | | 0.016 | 0.021 | 0.022 | 0.009 | 0.014 | 0.016 | 0.023 | 0.028 | 0.03 | 0.019 | 0.024 | 0.026 |
| 1.3 | 60-65 | 50 | | 0.014 | 0.019 | 0.02 | 0.007 | 0.012 | 0.014 | 0.021 | 0.026 | 0.028 | 0.018 | 0.023 | 0.025 |
| 1.4 | 66-70 | 40 | | 0.013 | 0.018 | 0.019 | 0.006 | 0.011 | 0.013 | 0.019 | 0.025 | 0.027 | 0.017 | 0.022 | 0.024 |

| Material | Strength (N/mm ²) | Feed (mm/Z) | Application | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|---------------------------------------|-------------|-------------|----------|------------------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | M | STAINLESS STEEL | Vc (m/min) | | | | | | | | | |
| 1.1 | ferritic/martensitic <850 | 90 | | 0.018 | 0.023 | 0.025 | 0.011 | 0.016 | 0.018 | 0.026 | 0.031 | 0.033 | 0.021 | 0.026 | 0.028 |
| 2.1 | austenitic <650 | 75 | | 0.017 | 0.022 | 0.024 | 0.01 | 0.015 | 0.017 | 0.024 | 0.029 | 0.031 | 0.019 | 0.025 | 0.027 |
| 2.2 | austenitic <750 | 70 | | 0.015 | 0.02 | 0.022 | 0.008 | 0.013 | 0.015 | 0.022 | 0.027 | 0.029 | 0.017 | 0.024 | 0.026 |
| 3.1 | DUPLEX STEEL super austenitic <1100 | 50 | | 0.014 | 0.019 | 0.021 | 0.007 | 0.012 | 0.014 | 0.02 | 0.025 | 0.027 | 0.015 | 0.023 | 0.025 |

| Material | Hardness in HRC | Feed (mm/Z) | Application | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|----------------------------|-------------|-------------|----------|---------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | N | COPPER | Vc (m/min) | | | | | | | | | |
| | Tungsten Copper (WCu) <700 | 110 | | 0.018 | 0.023 | 0.025 | 0.011 | 0.016 | 0.018 | 0.026 | 0.031 | 0.033 | 0.021 | 0.026 | 0.028 |

| Material | Hardness in HRC | Feed (mm/Z) | Application | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|--------------------|-------------|-------------|----------|--------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | P | STEEL | Vc (m/min) | | | | | | | | | |
| 1.1 | unalloyed <500 | 190 | | 0.022 | 0.027 | 0.029 | 0.015 | 0.02 | 0.022 | 0.03 | 0.037 | 0.039 | 0.025 | 0.032 | 0.034 |
| 1.2-1.5 | unalloyed <1100 | 180 | | 0.022 | 0.027 | 0.029 | 0.015 | 0.02 | 0.022 | 0.03 | 0.037 | 0.039 | 0.025 | 0.032 | 0.034 |
| 2.1-2.2 | low-alloyed <950 | 170 | | 0.02 | 0.025 | 0.027 | 0.013 | 0.018 | 0.02 | 0.028 | 0.035 | 0.037 | 0.023 | 0.03 | 0.032 |
| 2.3-2.4 | low-alloyed <1300 | 150 | | 0.02 | 0.025 | 0.027 | 0.013 | 0.018 | 0.02 | 0.028 | 0.035 | 0.037 | 0.023 | 0.03 | 0.032 |
| 3.1-3.2 | high-alloyed <1100 | 150 | | 0.018 | 0.023 | 0.025 | 0.011 | 0.016 | 0.018 | 0.026 | 0.032 | 0.034 | 0.021 | 0.027 | 0.029 |
| 3.3 | high-alloyed <1400 | 130 | | 0.017 | 0.022 | 0.024 | 0.01 | 0.015 | 0.017 | 0.025 | 0.03 | 0.032 | 0.02 | 0.025 | 0.027 |

| Material | Hardness in HRC | Feed (mm/Z) | Application | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|--------------------------|-------------|-------------|----------|-----------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | K | CASTINGS | Vc (m/min) | | | | | | | | | |
| 1.1-1.2 | Grey cast iron <1000 | 190 | | 0.022 | 0.027 | 0.029 | 0.015 | 0.02 | 0.022 | 0.03 | 0.037 | 0.039 | 0.025 | 0.032 | 0.034 |
| 2.1-2.2 | Modular cast iron <850 | 180 | | 0.02 | 0.025 | 0.027 | 0.013 | 0.018 | 0.02 | 0.028 | 0.035 | 0.037 | 0.023 | 0.03 | 0.032 |
| 3.1-3.2 | Malleable cast iron <800 | 170 | | 0.02 | 0.025 | 0.027 | 0.013 | 0.018 | 0.02 | 0.028 | 0.035 | 0.037 | 0.023 | 0.03 | 0.032 |

Note | The values marked in turquoise are side applications! Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values. ae/ap(max)=0.5x corner radius!

| Material | Hardness in HRC | Feed (mm/Z) | Application | Ø2.5x10 | | | Ø2.5x30 | | | Ø3x10 | | | Ø3x30 | | |
|----------|-----------------|-------------|-------------|----------|-----------------------|-------------------|---------|-----------|-----------|--------|----------|----------|--------|-----------|-----------|
| | | | | ae=1xD | ae=0.1xD | ae=0.1xD | ae=1xD | ae=0.04xD | ae=0.04xD | ae=1xD | ae=0.1xD | ae=0.1xD | ae=1xD | ae=0.05xD | ae=0.05xD |
| Material | Hardness in HRC | Feed (mm/Z) | Application | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| | | | | H | HARDENED STEEL | Vc (m/min) | | | | | | | | | |
| 1.1 | 46-55 | 110 | | 0.025 | 0.03 | 0.032 | 0.02 | 0.025 | 0.027 | 0.027 | 0.032 | 0.034 | 0.017 | 0.022 | 0.024 |
| 1.2 | 56-60 | 70 | | 0.023 | 0.028 | 0.03 | 0.019 | 0.024 | 0.026 | 0.025 | 0.03 | 0.032 | 0.015 | 0.02 | 0.022 |
| 1.3 | 60-65 | 50 | | 0.021 | 0.026 | 0.028 | 0.018 | 0.023 | 0.025 | 0.023 | 0.028 | 0.03 | 0.013 | 0.018 | 0.02 |
| 1.4 | 66-70 | 40 | | 0.019 | 0.025 | 0.027 | 0.017 | 0.022 | 0.024 | 0.021 | 0.026 | 0.028 | 0.011 | 0.016 | 0.018 |

| Material | Strength (N/mm ²) | Feed (mm/Z) | Application | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|---------------------------------------|-------------|-------------|----------|------------------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | M | STAINLESS STEEL | Vc (m/min) | | | | | | | | | |
| 1.1 | ferritic/martensitic <850 | 90 | | 0.026 | 0.031 | 0.033 | 0.021 | 0.026 | 0.028 | 0.028 | 0.033 | 0.034 | 0.018 | 0.023 | 0.025 |
| 2.1 | austenitic <650 | 75 | | 0.024 | 0.029 | 0.031 | 0.019 | 0.024 | 0.026 | 0.026 | 0.031 | 0.033 | 0.016 | 0.021 | 0.023 |
| 2.2 | austenitic <750 | 70 | | 0.022 | 0.027 | 0.029 | 0.017 | 0.022 | 0.024 | 0.024 | 0.029 | 0.031 | 0.014 | 0.019 | 0.021 |
| 3.1 | DUPLEX STEEL super austenitic <1100 | 50 | | 0.02 | 0.026 | 0.028 | 0.016 | 0.02 | 0.022 | 0.022 | 0.027 | 0.029 | 0.012 | 0.017 | 0.019 |

| Material | Hardness in HRC | Feed (mm/Z) | Application | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|----------------------------|-------------|-------------|----------|---------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | N | COPPER | Vc (m/min) | | | | | | | | | |
| | Tungsten Copper (WCu) <700 | 110 | | 0.026 | 0.031 | 0.033 | 0.021 | 0.026 | 0.028 | 0.028 | 0.033 | 0.034 | 0.018 | 0.023 | 0.025 |

| Material | Hardness in HRC | Feed (mm/Z) | Application | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|--------------------|-------------|-------------|----------|--------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | P | STEEL | Vc (m/min) | | | | | | | | | |
| 1.1 | unalloyed <500 | 190 | | 0.03 | 0.036 | 0.038 | 0.025 | 0.031 | 0.033 | 0.032 | 0.038 | 0.04 | 0.022 | 0.028 | 0.03 |
| 1.2-1.5 | unalloyed <1100 | 180 | | 0.03 | 0.036 | 0.038 | 0.025 | 0.031 | 0.033 | 0.032 | 0.038 | 0.04 | 0.022 | 0.028 | 0.03 |
| 2.1-2.2 | low-alloyed <950 | 170 | | 0.028 | 0.034 | 0.036 | 0.023 | 0.029 | 0.031 | 0.03 | 0.036 | 0.038 | 0.02 | 0.026 | 0.028 |
| 2.3-2.4 | low-alloyed <1300 | 150 | | 0.028 | 0.034 | 0.036 | 0.023 | 0.029 | 0.031 | 0.03 | 0.036 | 0.038 | 0.02 | 0.026 | 0.028 |
| 3.1-3.2 | high-alloyed <1100 | 150 | | 0.026 | 0.031 | 0.033 | 0.021 | 0.026 | 0.028 | 0.028 | 0.033 | 0.035 | 0.018 | 0.023 | 0.025 |
| 3.3 | high-alloyed <1400 | 130 | | 0.025 | 0.03 | 0.032 | 0.02 | 0.025 | 0.027 | 0.027 | 0.032 | 0.034 | 0.017 | 0.022 | 0.024 |

| Material | Hardness in HRC | Feed (mm/Z) | Application | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|--------------------------|-------------|-------------|----------|-----------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | K | CASTINGS | Vc (m/min) | | | | | | | | | |
| 1.1-1.2 | Grey cast iron <1000 | 190 | | 0.03 | 0.036 | 0.038 | 0.025 | 0.031 | 0.033 | 0.032 | 0.038 | 0.04 | 0.022 | 0.028 | 0.03 |
| 2.1-2.2 | Modular cast iron <850 | 180 | | 0.028 | 0.034 | 0.036 | 0.023 | 0.029 | 0.031 | 0.03 | 0.036 | 0.038 | 0.02 | 0.028 | 0.028 |
| 3.1-3.2 | Malleable cast iron <800 | 170 | | 0.028 | 0.034 | 0.036 | 0.023 | 0.029 | 0.031 | 0.03 | 0.036 | 0.038 | 0.02 | 0.026 | 0.028 |


Note | The values marked in turquoise are side applications! Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values. ae/ap(max)=0.5x corner radius!




| | |
|-----------|----------------|
| Cooling | |
| Tolerance | d04 |
| Coating | AlphaDura Navy |

| | | |
|-------------|-----|--|
| Strategy | HSC | |
| Application | | |
| Features | HA | |

- Ultrafine carbide grade developed for machining hardened steels
- Optimized face geometry for long tool life and highest dimensional accuracy
- Reinforced core for milling up to 70 HRC

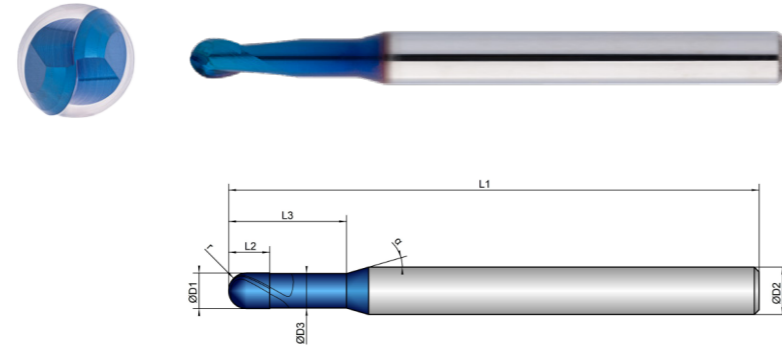





















- Tolerance D1: -0.001/-0.006 mm
- Tolerance D3: 0/-0.02 mm
- Radius tolerance r: 0/-0.003 mm (measured from 0-90°)




| K203206 | D1 mm ∅ | D3 mm ∅ | L2 mm | L3 mm | L1 mm | D2 mm ∅ | z # | r mm | | α ° |
|----------|---------------|---------------|----------|----------|----------|---------------|--------|---------|----|--------|
| 0,2X0,3 | 0.2 | 0.17 | 0.16 | 0.3 | 45.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,2X0,5 | 0.2 | 0.17 | 0.16 | 0.5 | 45.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,2X0,75 | 0.2 | 0.17 | 0.16 | 0.75 | 45.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,2X1 | 0.2 | 0.17 | 0.16 | 1.0 | 45.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,2X1,25 | 0.2 | 0.17 | 0.16 | 1.25 | 45.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,2X1,5 | 0.2 | 0.17 | 0.16 | 1.5 | 45.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,2X1,75 | 0.2 | 0.17 | 0.16 | 1.75 | 45.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,2X2 | 0.2 | 0.17 | 0.16 | 2.0 | 45.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,2X2,5 | 0.2 | 0.17 | 0.16 | 2.5 | 45.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,2X3 | 0.2 | 0.17 | 0.16 | 3.0 | 45.0 | 4.0 | 2 | 0.10 | 30 | 16 |
| 0,3X0,5 | 0.3 | 0.27 | 0.24 | 0.5 | 45.0 | 4.0 | 2 | 0.15 | 30 | 16 |
| 0,3X0,75 | 0.3 | 0.27 | 0.24 | 0.75 | 45.0 | 4.0 | 2 | 0.15 | 30 | 16 |
| 0,3X1 | 0.3 | 0.27 | 0.24 | 1.0 | 45.0 | 4.0 | 2 | 0.15 | 30 | 16 |
| 0,3X1,25 | 0.3 | 0.27 | 0.24 | 1.25 | 45.0 | 4.0 | 2 | 0.15 | 30 | 16 |

| K203206 | D1 mm ∅ | D3 mm ∅ | L2 mm | L3 mm | L1 mm | D2 mm ∅ | z # | r mm | | α ° |
|----------|---------------|---------------|----------|----------|----------|---------------|--------|---------|----|--------|
| 0,3X1,5 | 0.3 | 0.27 | 0.24 | 1.5 | 45.0 | 4.0 | 2 | 0.15 | 30 | 16 |
| 0,4X0,5 | 0.4 | 0.37 | 0.32 | 0.5 | 45.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 0,4X0,75 | 0.4 | 0.37 | 0.32 | 0.75 | 45.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 0,4X1 | 0.4 | 0.37 | 0.32 | 1.0 | 45.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 0,4X1,5 | 0.4 | 0.37 | 0.32 | 1.5 | 45.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 0,4X2 | 0.4 | 0.37 | 0.32 | 2.0 | 45.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 0,4X2,5 | 0.4 | 0.37 | 0.32 | 2.5 | 45.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 0,4X3 | 0.4 | 0.37 | 0.32 | 3.0 | 45.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 0,4X3,5 | 0.4 | 0.37 | 0.32 | 3.5 | 45.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 0,4X4 | 0.4 | 0.37 | 0.32 | 4.0 | 45.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 0,4X4,5 | 0.4 | 0.37 | 0.32 | 4.5 | 45.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 0,4X5 | 0.4 | 0.37 | 0.32 | 5.0 | 45.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 0,4X5,5 | 0.4 | 0.37 | 0.32 | 5.5 | 45.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 0,4X6 | 0.4 | 0.37 | 0.32 | 6.0 | 45.0 | 4.0 | 2 | 0.20 | 30 | 16 |
| 0,5X1 | 0.5 | 0.47 | 0.4 | 1.0 | 45.0 | 4.0 | 2 | 0.25 | 30 | 16 |
| 0,5X1,5 | 0.5 | 0.47 | 0.4 | 1.5 | 45.0 | 4.0 | 2 | 0.25 | 30 | 16 |
| 0,5X2 | 0.5 | 0.47 | 0.4 | 2.0 | 45.0 | 4.0 | 2 | 0.25 | 30 | 16 |
| 0,5X2,5 | 0.5 | 0.47 | 0.4 | 2.5 | 45.0 | 4.0 | 2 | 0.25 | 30 | 16 |
| 0,5X3 | 0.5 | 0.47 | 0.4 | 3.0 | 45.0 | 4.0 | 2 | 0.25 | 30 | 16 |
| 0,5X3,5 | 0.5 | 0.47 | 0.4 | 3.5 | 45.0 | 4.0 | 2 | 0.25 | 30 | 16 |
| 0,5X4 | 0.5 | 0.47 | 0.4 | 4.0 | 45.0 | 4.0 | 2 | 0.25 | 30 | 16 |
| 0,5X4,5 | 0.5 | 0.47 | 0.4 | 4.5 | 45.0 | 4.0 | 2 | 0.25 | 30 | 16 |
| 0,5X5 | 0.5 | 0.47 | 0.4 | 5.0 | 45.0 | 4.0 | 2 | 0.25 | 30 | 16 |
| 0,5X5,5 | 0.5 | 0.47 | 0.4 | 5.5 | 45.0 | 4.0 | 2 | 0.25 | 30 | 16 |
| 0,5X6 | 0.5 | 0.47 | 0.4 | 6.0 | 45.0 | 4.0 | 2 | 0.25 | 30 | 16 |
| 0,5X7 | 0.5 | 0.47 | 0.4 | 7.0 | 45.0 | 4.0 | 2 | 0.25 | 30 | 16 |
| 0,5X8 | 0.5 | 0.47 | 0.4 | 8.0 | 45.0 | 4.0 | 2 | 0.25 | 30 | 16 |

| K203206 | D1  mm ∅ | D3  mm ∅ | L2  mm | L3  mm | L1  mm | D2  mm ∅ | z  # | r  mm |  ° | α  ° |
|---------|--|--|---|---|---|--|--|--|--|---|
| 0,5X9 | 0.5 | 0.47 | 0.4 | 9.0 | 45.0 | 4.0 | 2 | 0.25 | 30 | 16 |
| 0,6X1 | 0.6 | 0.57 | 0.48 | 1.0 | 45.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 0,6X2 | 0.6 | 0.57 | 0.48 | 2.0 | 45.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 0,6X3 | 0.6 | 0.57 | 0.48 | 3.0 | 45.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 0,6X4 | 0.6 | 0.57 | 0.48 | 4.0 | 45.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 0,6X5 | 0.6 | 0.57 | 0.48 | 5.0 | 45.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 0,6X6 | 0.6 | 0.57 | 0.48 | 6.0 | 45.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 0,6X8 | 0.6 | 0.57 | 0.48 | 8.0 | 45.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 0,8X2 | 0.8 | 0.77 | 0.64 | 2.0 | 45.0 | 4.0 | 2 | 0.40 | 30 | 16 |
| 0,8X3 | 0.8 | 0.77 | 0.64 | 3.0 | 45.0 | 4.0 | 2 | 0.40 | 30 | 16 |
| 0,8X4 | 0.8 | 0.77 | 0.64 | 4.0 | 45.0 | 4.0 | 2 | 0.40 | 30 | 16 |
| 0,8X5 | 0.8 | 0.77 | 0.64 | 5.0 | 45.0 | 4.0 | 2 | 0.40 | 30 | 16 |
| 0,8X6 | 0.8 | 0.77 | 0.64 | 6.0 | 45.0 | 4.0 | 2 | 0.40 | 30 | 16 |
| 0,8X7 | 0.8 | 0.77 | 0.64 | 7.0 | 45.0 | 4.0 | 2 | 0.40 | 30 | 16 |
| 0,8X8 | 0.8 | 0.77 | 0.64 | 8.0 | 45.0 | 4.0 | 2 | 0.40 | 30 | 16 |
| 0,8X9 | 0.8 | 0.77 | 0.64 | 9.0 | 45.0 | 4.0 | 2 | 0.40 | 30 | 16 |
| 1X2,5 | 1.0 | 0.96 | 0.8 | 2.5 | 45.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1X3 | 1.0 | 0.96 | 0.8 | 3.0 | 45.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1X4 | 1.0 | 0.96 | 0.8 | 4.0 | 45.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1X5 | 1.0 | 0.96 | 0.8 | 5.0 | 45.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1X6 | 1.0 | 0.96 | 0.8 | 6.0 | 45.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1X7 | 1.0 | 0.96 | 0.8 | 7.0 | 45.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1X8 | 1.0 | 0.96 | 0.8 | 8.0 | 45.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1X9 | 1.0 | 0.96 | 0.8 | 9.0 | 45.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1X10 | 1.0 | 0.96 | 0.8 | 10.0 | 45.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1X12 | 1.0 | 0.96 | 0.8 | 12.0 | 45.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1,2X6 | 1.2 | 1.16 | 0.96 | 6.0 | 45.0 | 4.0 | 2 | 0.60 | 30 | 16 |

| K203206 | D1  mm ∅ | D3  mm ∅ | L2  mm | L3  mm | L1  mm | D2  mm ∅ | z  # | r  mm |  ° | α  ° |
|---------|--|--|---|---|---|--|---|--|--|---|
| 1,2X8 | 1.2 | 1.16 | 0.96 | 8.0 | 45.0 | 4.0 | 2 | 0.60 | 30 | 16 |
| 1,2X10 | 1.2 | 1.16 | 0.96 | 10.0 | 45.0 | 4.0 | 2 | 0.60 | 30 | 16 |
| 1,2X12 | 1.2 | 1.16 | 0.96 | 12.0 | 45.0 | 4.0 | 2 | 0.60 | 30 | 16 |
| 1,4X8 | 1.4 | 1.34 | 1.12 | 8.0 | 45.0 | 4.0 | 2 | 0.70 | 30 | 16 |
| 1,4X12 | 1.4 | 1.34 | 1.12 | 12.0 | 45.0 | 4.0 | 2 | 0.70 | 30 | 16 |
| 1,5X3 | 1.5 | 1.44 | 1.2 | 3.0 | 45.0 | 4.0 | 2 | 0.75 | 30 | 16 |
| 1,5X4 | 1.5 | 1.44 | 1.2 | 4.0 | 45.0 | 4.0 | 2 | 0.75 | 30 | 16 |
| 1,5X6 | 1.5 | 1.44 | 1.2 | 6.0 | 45.0 | 4.0 | 2 | 0.75 | 30 | 16 |
| 1,5X8 | 1.5 | 1.44 | 1.2 | 8.0 | 45.0 | 4.0 | 2 | 0.75 | 30 | 16 |
| 1,5X10 | 1.5 | 1.44 | 1.2 | 10.0 | 45.0 | 4.0 | 2 | 0.75 | 30 | 16 |
| 1,5X12 | 1.5 | 1.44 | 1.2 | 12.0 | 45.0 | 4.0 | 2 | 0.75 | 30 | 16 |
| 1,6X8 | 1.6 | 1.54 | 1.28 | 8.0 | 45.0 | 4.0 | 2 | 0.80 | 30 | 16 |
| 1,6X12 | 1.6 | 1.54 | 1.28 | 12.0 | 45.0 | 4.0 | 2 | 0.80 | 30 | 16 |
| 1,8X8 | 1.8 | 1.74 | 1.44 | 8.0 | 45.0 | 4.0 | 2 | 0.90 | 30 | 16 |
| 1,8X12 | 1.8 | 1.74 | 1.44 | 12.0 | 45.0 | 4.0 | 2 | 0.90 | 30 | 16 |
| 2X3 | 2.0 | 1.94 | 1.6 | 3.0 | 45.0 | 4.0 | 2 | 1.00 | 30 | 16 |
| 2X4 | 2.0 | 1.94 | 1.6 | 4.0 | 45.0 | 4.0 | 2 | 1.00 | 30 | 16 |
| 2X6 | 2.0 | 1.94 | 1.6 | 6.0 | 45.0 | 4.0 | 2 | 1.00 | 30 | 16 |
| 2X8 | 2.0 | 1.94 | 1.6 | 8.0 | 45.0 | 4.0 | 2 | 1.00 | 30 | 16 |
| 2X10 | 2.0 | 1.94 | 1.6 | 10.0 | 45.0 | 4.0 | 2 | 1.00 | 30 | 16 |
| 2X12 | 2.0 | 1.94 | 1.6 | 12.0 | 45.0 | 4.0 | 2 | 1.00 | 30 | 16 |
| 2,5X10 | 2.5 | 2.41 | 2.0 | 10.0 | 45.0 | 4.0 | 2 | 1.25 | 30 | 16 |
| 3X8 | 3.0 | 2.92 | 3.5 | 8.0 | 45.0 | 4.0 | 2 | 1.50 | 30 | 16 |
| 3X10 | 3.0 | 2.92 | 3.5 | 10.0 | 45.0 | 4.0 | 2 | 1.50 | 30 | 16 |
| 3X12 | 3.0 | 2.92 | 3.5 | 12.0 | 45.0 | 4.0 | 2 | 1.50 | 30 | 16 |
| 3X16 | 3.0 | 2.92 | 3.5 | 16.0 | 45.0 | 4.0 | 2 | 1.50 | 30 | 16 |

| Material | Hardness in HRC | Feed (mm/Z) | Dimension | | | | | | | | | |
|----------------|-----------------|-------------|---|---------|-----------|-----------|-----------|---------|---------|---------|---------|---------|
| | | | 00.2 x0.3 | 00.2 x3 | 00.3 x0.5 | 00.3 x1.5 | 00.4 x0.5 | 00.4 x6 | 00.5 x1 | 00.5 x9 | 00.6 x1 | 00.6 x8 |
| | | | Infeed in mm ae= 0.1xD, 0.02xD, 0.1xD, 0.09xD, 0.1xD, 0.02xD, 0.1xD, 0.01xD, 0.1xD, 0.035xD ap= 0.1xD, 0.02xD, 0.1xD, 0.09xD, 0.1xD, 0.02xD, 0.1xD, 0.01xD, 0.1xD, 0.035xD | | | | | | | | | |
| | | | Application  | | | | | | | | | |
| HARDENED STEEL | | | Vc (m/min) | | | | | | | | | |
| 1.1 | 46-55 | 110 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 1.2 | 56-60 | 70 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 1.3 | 60-65 | 50 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 1.4 | 66-70 | 40 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |


| Material | Strength (N/mm²) | Feed (mm/Z) | Dimension | | | | | | | | | |
|-----------------|---------------------------------------|-------------|------------|---------|-----------|-----------|-----------|---------|---------|---------|---------|---------|
| | | | 00.2 x0.3 | 00.2 x3 | 00.3 x0.5 | 00.3 x1.5 | 00.4 x0.5 | 00.4 x6 | 00.5 x1 | 00.5 x9 | 00.6 x1 | 00.6 x8 |
| STAINLESS STEEL | | | Vc (m/min) | | | | | | | | | |
| 1.1 | ferritic/martensitic <850 | 90 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 2.1 | austenitic <650 | 75 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 2.2 | austenitic <750 | 70 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 3.1 | DUPLEX STEEL super austenitic <1100 | 50 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |

| COPPER | | | Vc (m/min) | | | | | | | | | |
|-----------------------|------|-----|------------|----|----|----|----|----|----|----|----|----|
| Tungsten Copper (WCu) | <700 | 120 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |

| STEEL | | | Vc (m/min) | | | | | | | | | |
|---------|--------------------|-----|------------|----|----|----|----|----|----|----|----|----|
| 1.1 | unalloyed <500 | 190 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 1.2-1.5 | unalloyed <1100 | 180 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 2.1-2.2 | low-alloyed <950 | 170 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 2.3-2.4 | low-alloyed <1300 | 150 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 3.1-3.2 | high-alloyed <1100 | 150 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 3.3 | high-alloyed <1400 | 130 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |

| CASTINGS | | | Vc (m/min) | | | | | | | | | |
|----------|--------------------------|-----|------------|----|----|----|----|----|----|----|----|----|
| 1.1-1.2 | Grey cast iron <1000 | 190 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 2.1-2.2 | Modular cast iron <850 | 180 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 3.1-3.2 | Malleable cast iron <800 | 170 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |

Note | The values marked in turquoise are side applications! Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values.

| Material | Hardness in HRC | Feed (mm/Z) | Dimension | | | | | | | | | |
|----------------|-----------------|-------------|---|---------|---------|--------|---------|----------|---------|----------|---------|----------|
| | | | 00.8 x2 | 00.8 x9 | 01 x2.5 | 01 x12 | 01.2 x6 | 01.2 x12 | 01.4 x8 | 01.4 x12 | 01.5 x3 | 01.5 x12 |
| | | | Infeed in mm ae= 0.1xD, 0.04xD, 0.1xD, 0.035xD, 0.1xD, 0.05xD, 0.09xD, 0.04xD, 0.1xD, 0.08xD ap= 0.1xD, 0.04xD, 0.1xD, 0.035xD, 0.1xD, 0.05xD, 0.09xD, 0.04xD, 0.1xD, 0.08xD | | | | | | | | | |
| | | | Application  | | | | | | | | | |
| HARDENED STEEL | | | Vc (m/min) | | | | | | | | | |
| 1.1 | 46-55 | 110 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 1.2 | 56-60 | 70 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 1.3 | 60-65 | 50 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 1.4 | 66-70 | 40 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |










| Material | Strength (N/mm²) | Feed (mm/Z) | Dimension | | | | | | | | | |
|-----------------|---------------------------------------|-------------|------------|---------|---------|--------|---------|----------|---------|----------|---------|----------|
| | | | 00.8 x2 | 00.8 x9 | 01 x2.5 | 01 x12 | 01.2 x6 | 01.2 x12 | 01.4 x8 | 01.4 x12 | 01.5 x3 | 01.5 x12 |
| STAINLESS STEEL | | | Vc (m/min) | | | | | | | | | |
| 1.1 | ferritic/martensitic <850 | 90 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 2.1 | austenitic <650 | 75 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 2.2 | austenitic <750 | 70 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 3.1 | DUPLEX STEEL super austenitic <1100 | 50 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |

| COPPER | | | Vc (m/min) | | | | | | | | | |
|-----------------------|------|-----|------------|----|----|----|----|----|----|----|----|----|
| Tungsten Copper (WCu) | <700 | 120 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |

| STEEL | | | Vc (m/min) | | | | | | | | | |
|---------|--------------------|-----|------------|----|----|----|----|----|----|----|----|----|
| 1.1 | unalloyed <500 | 190 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 1.2-1.5 | unalloyed <1100 | 180 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 2.1-2.2 | low-alloyed <950 | 170 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 2.3-2.4 | low-alloyed <1300 | 150 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 3.1-3.2 | high-alloyed <1100 | 150 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 3.3 | high-alloyed <1400 | 130 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |

| CASTINGS | | | Vc (m/min) | | | | | | | | | |
|----------|--------------------------|-----|------------|----|----|----|----|----|----|----|----|----|
| 1.1-1.2 | Grey cast iron <1000 | 190 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 2.1-2.2 | Modular cast iron <850 | 180 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| 3.1-3.2 | Malleable cast iron <800 | 170 | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |

Note | The values marked in turquoise are side applications! Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values.

| Dimension | Ø1.6 x8 | Ø1.6 x12 | Ø1.8 x8 | Ø1.8 x12 | Ø2 x3 | Ø2 x12 | Ø2.5 x10 | Ø3 x8 | Ø3 x16 |
|--------------|---|---|---|---|---|--|---|---|---|
| Infeed in mm | ae=0.1xD ap=0.1xD | ae=0.08xD ap=0.08xD | ae=0.1xD ap=0.1xD | ae=0.09xD ap=0.09xD | ae=0.1xD ap=0.1xD | ae=0.09xD ap=0.09xD | ae=0.1xD ap=0.1xD | ae=0.01xD ap=0.01xD | ae=0.1xD ap=0.1xD |
| Application |  |  |  |  |  |  |  |  |  |

| Material | Hardness in HRC | Feed (mm/Z) | Hardness in HRC | | | | | | | | | |
|----------|-----------------------|-------------------|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|----|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| H | HARDENED STEEL | Vc (m/min) | | | | | | | | | | |
| 1.1 | 46-55 | 110 | 0.038 | 0.033 | 0.04 | 0.037 | 0.041 | 0.038 | 0.041 | 0.044 | 0.041 | |
| 1.2 | 56-60 | 70 | 0.037 | 0.032 | 0.039 | 0.036 | 0.04 | 0.037 | 0.04 | 0.042 | 0.039 | |
| 1.3 | 60-65 | 50 | 0.035 | 0.03 | 0.037 | 0.034 | 0.038 | 0.035 | 0.038 | 0.04 | 0.037 | |
| 1.4 | 66-70 | 40 | 0.03 | 0.025 | 0.032 | 0.029 | 0.033 | 0.03 | 0.033 | 0.035 | 0.032 | |

| Material | Strength (N/mm²) | Feed (mm/Z) | Strength (N/mm²) | | | | | | | | | |
|----------|---------------------------------------|-------------------|------------------|-------|-------|-------|-------|-------|-------|-------|-------|----|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| M | STAINLESS STEEL | Vc (m/min) | | | | | | | | | | |
| 1.1 | ferritic/martensitic <850 | 90 | 0.038 | 0.033 | 0.04 | 0.037 | 0.041 | 0.038 | 0.041 | 0.044 | 0.041 | |
| 2.1 | austenitic <650 | 75 | 0.037 | 0.032 | 0.039 | 0.036 | 0.04 | 0.037 | 0.04 | 0.042 | 0.039 | |
| 2.2 | austenitic <750 | 70 | 0.035 | 0.03 | 0.037 | 0.034 | 0.038 | 0.035 | 0.038 | 0.04 | 0.037 | |
| 3.1 | DUPLEX STEEL super austenitic <1100 | 50 | 0.03 | 0.025 | 0.032 | 0.029 | 0.033 | 0.03 | 0.033 | 0.035 | 0.032 | |

| Material | Hardness in HRC | Feed (mm/Z) | Hardness in HRC | | | | | | | | | |
|----------|----------------------------|-------------------|-----------------|-------|------|-------|-------|-------|-------|-------|-------|----|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| N | COPPER | Vc (m/min) | | | | | | | | | | |
| | Tungsten Copper (WCu) <700 | 120 | 0.038 | 0.033 | 0.04 | 0.037 | 0.041 | 0.038 | 0.041 | 0.044 | 0.041 | |

| Material | Hardness in HRC | Feed (mm/Z) | Hardness in HRC | | | | | | | | | |
|----------|--------------------|-------------------|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|----|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| P | STEEL | Vc (m/min) | | | | | | | | | | |
| 1.1 | unalloyed <500 | 190 | 0.038 | 0.033 | 0.04 | 0.037 | 0.041 | 0.038 | 0.041 | 0.044 | 0.041 | |
| 1.2-1.5 | unalloyed <1100 | 180 | 0.038 | 0.033 | 0.04 | 0.037 | 0.041 | 0.038 | 0.041 | 0.044 | 0.041 | |
| 2.1-2.2 | low-alloyed <950 | 170 | 0.037 | 0.032 | 0.039 | 0.036 | 0.04 | 0.037 | 0.04 | 0.042 | 0.039 | |
| 2.3-2.4 | low-alloyed <1300 | 150 | 0.037 | 0.032 | 0.039 | 0.036 | 0.04 | 0.037 | 0.04 | 0.042 | 0.039 | |
| 3.1-3.2 | high-alloyed <1100 | 150 | 0.035 | 0.03 | 0.037 | 0.034 | 0.038 | 0.035 | 0.038 | 0.04 | 0.037 | |
| 3.3 | high-alloyed <1400 | 130 | 0.03 | 0.025 | 0.032 | 0.029 | 0.033 | 0.03 | 0.033 | 0.035 | 0.032 | |


| Material | Hardness in HRC | Feed (mm/Z) | Hardness in HRC | | | | | | | | | |
|----------|--------------------------|-------------------|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|----|
| | | | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
| K | CASTINGS | Vc (m/min) | | | | | | | | | | |
| 1.1-1.2 | Grey cast iron <1000 | 190 | 0.038 | 0.033 | 0.04 | 0.037 | 0.041 | 0.038 | 0.041 | 0.044 | 0.041 | |
| 2.1-2.2 | Modular cast iron <850 | 180 | 0.037 | 0.032 | 0.039 | 0.036 | 0.04 | 0.037 | 0.04 | 0.042 | 0.039 | |
| 3.1-3.2 | Malleable cast iron <800 | 170 | 0.037 | 0.032 | 0.039 | 0.036 | 0.04 | 0.037 | 0.04 | 0.042 | 0.039 | |

Note | The values marked in turquoise are side applications!
 Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values.


| | |
|-----------|----------------|
| Cooling | |
| Tolerance | d04 |
| Coating | AlphaDura Navy |

| | | |
|-------------|------------|--|
| Strategy | HSC | |
| Application | | |
| Features | HA | |

- Ultrafine carbide grade developed for machining hardened steels
- Optimized face geometry for long tool life and highest dimensional accuracy
- Reinforced core for milling up to 70 HRC

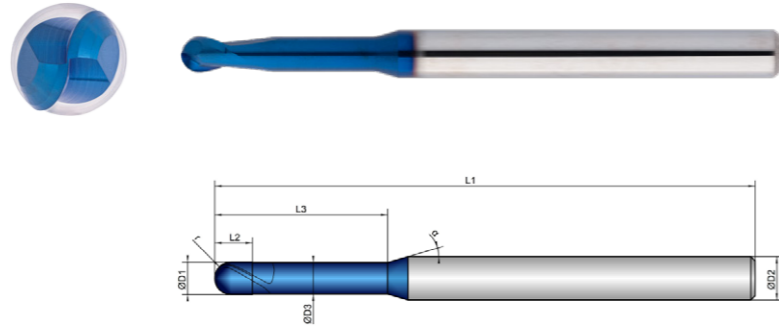

- Tolerance D1: -0.001/-0.006 mm
- Tolerance D3: 0/-0.02 mm
- Radius tolerance r: 0/-0.003 mm (measured from 0-90°)

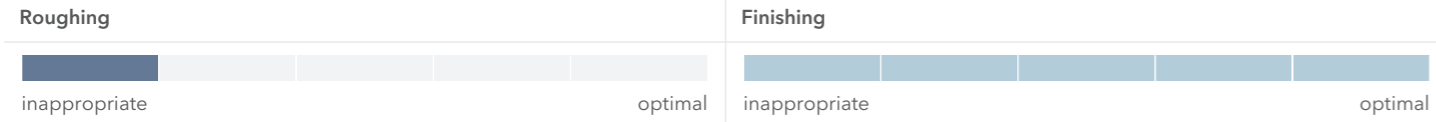

| K203212 | D1 mm ∅ | D3 mm ∅ | L2 mm | L3 mm | L1 mm | D2 mm ∅ | z # | r mm | | α ° |
|----------|---------------|---------------|----------|----------|----------|---------------|--------|---------|----|--------|
| 0,3X1,75 | 0.3 | 0.27 | 0.24 | 1.75 | 50.0 | 4.0 | 2 | 0.15 | 30 | 16 |
| 0,3X2 | 0.3 | 0.27 | 0.24 | 2.0 | 50.0 | 4.0 | 2 | 0.15 | 30 | 16 |
| 0,3X2,25 | 0.3 | 0.27 | 0.24 | 2.25 | 50.0 | 4.0 | 2 | 0.15 | 30 | 16 |
| 0,3X2,5 | 0.3 | 0.27 | 0.24 | 2.5 | 50.0 | 4.0 | 2 | 0.15 | 30 | 16 |
| 0,3X2,75 | 0.3 | 0.27 | 0.24 | 2.75 | 50.0 | 4.0 | 2 | 0.15 | 30 | 16 |
| 0,3X3 | 0.3 | 0.27 | 0.24 | 3.0 | 50.0 | 4.0 | 2 | 0.15 | 30 | 16 |
| 0,3X3,5 | 0.3 | 0.27 | 0.24 | 3.5 | 50.0 | 4.0 | 2 | 0.15 | 30 | 16 |
| 0,3X4 | 0.3 | 0.27 | 0.24 | 4.0 | 50.0 | 4.0 | 2 | 0.15 | 30 | 16 |
| 0,3X4,5 | 0.3 | 0.27 | 0.24 | 4.5 | 50.0 | 4.0 | 2 | 0.15 | 30 | 16 |
| 0,5X10 | 0.5 | 0.47 | 0.4 | 10.0 | 50.0 | 4.0 | 2 | 0.25 | 30 | 16 |
| 0,6X10 | 0.6 | 0.57 | 0.48 | 10.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |
| 0,6X12 | 0.6 | 0.57 | 0.48 | 12.0 | 50.0 | 4.0 | 2 | 0.30 | 30 | 16 |

| K203212 | D1 mm ∅ | D3 mm ∅ | L2 mm | L3 mm | L1 mm | D2 mm ∅ | z # | r mm | | α ° |
|---------|---------------|---------------|----------|----------|----------|---------------|--------|---------|----|--------|
| 0,8X10 | 0.8 | 0.77 | 0.64 | 10.0 | 50.0 | 4.0 | 2 | 0.40 | 30 | 16 |
| 1X14 | 1.0 | 0.96 | 0.8 | 14.0 | 50.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1X16 | 1.0 | 0.96 | 0.8 | 16.0 | 50.0 | 4.0 | 2 | 0.50 | 30 | 16 |
| 1,2X14 | 1.2 | 1.16 | 0.96 | 14.0 | 50.0 | 4.0 | 2 | 0.60 | 30 | 16 |
| 1,2X16 | 1.2 | 1.16 | 0.96 | 16.0 | 50.0 | 4.0 | 2 | 0.60 | 30 | 16 |
| 1,4X16 | 1.4 | 1.34 | 1.12 | 16.0 | 50.0 | 4.0 | 2 | 0.70 | 30 | 16 |
| 1,5X14 | 1.5 | 1.44 | 1.2 | 14.0 | 50.0 | 4.0 | 2 | 0.75 | 30 | 16 |
| 1,5X16 | 1.5 | 1.44 | 1.2 | 16.0 | 50.0 | 4.0 | 2 | 0.75 | 30 | 16 |
| 1,6X16 | 1.6 | 1.54 | 1.28 | 16.0 | 50.0 | 4.0 | 2 | 0.80 | 30 | 16 |
| 1,8X16 | 1.8 | 1.74 | 1.44 | 16.0 | 50.0 | 4.0 | 2 | 0.90 | 30 | 16 |
| 2X14 | 2.0 | 1.94 | 1.6 | 14.0 | 50.0 | 4.0 | 2 | 1.00 | 30 | 16 |
| 2X16 | 2.0 | 1.94 | 1.6 | 16.0 | 50.0 | 4.0 | 2 | 1.00 | 30 | 16 |
| 2,5X15 | 2.5 | 2.41 | 2.0 | 15.0 | 50.0 | 4.0 | 2 | 1.25 | 30 | 16 |
| 3X16 | 3.0 | 2.92 | 3.5 | 16.0 | 50.0 | 4.0 | 2 | 1.50 | 30 | 16 |

| Material | Hardness in HRC | Feed (mm/Z) | Dimension | 00.3 x1.75 | 00.3 x4.5 | 00.5 x10 | 00.6 x10 | 00.6 x12 | 00.8 x10 | 01 x14 | 01 x16 | 01.2 x14 | 01.2 x16 |
|----------|-----------------|-------------|--------------|------------------------|------------------------|------------------------|------------------------|------------------------|--------------------------|------------------------|------------------------|--------------------------|------------------------|
| | | | Infeed in mm | ae=0.09xD ap=0.09xD | ae=0.03xD ap=0.03xD | ae=0.01xD ap=0.01xD | ae=0.01xD ap=0.01xD | ae=0.01xD ap=0.01xD | ae=0.035xD ap=0.035xD | ae=0.02xD ap=0.02xD | ae=0.01xD ap=0.01xD | ae=0.035xD ap=0.035xD | ae=0.03xD ap=0.03xD |
| | | | Application | | | | | | | | | | |
| H | HARDENED STEEL | Vc (m/min) | 110 | 0.021 | 0.018 | 0.018 | 0.018 | 0.02 | 0.022 | 0.024 | 0.022 | 0.026 | 0.024 |
| 1.1 | 46-55 | 70 | 0.02 | 0.017 | 0.017 | 0.017 | 0.019 | 0.021 | 0.023 | 0.021 | 0.025 | 0.023 | |
| 1.2 | 56-60 | 50 | 0.019 | 0.016 | 0.016 | 0.016 | 0.018 | 0.02 | 0.022 | 0.02 | 0.024 | 0.022 | |
| 1.3 | 60-65 | 40 | 0.016 | 0.011 | 0.013 | 0.013 | 0.014 | 0.016 | 0.018 | 0.016 | 0.02 | 0.018 | |
| 1.4 | 66-70 | | | | | | | | | | | | |

| Material | Strength (N/mm ²) | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|---------------------------------------|-------------|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | Vc (m/min) | 90 | 0.021 | 0.018 | 0.018 | 0.018 | 0.02 | 0.022 | 0.024 | 0.022 |
| 1.1 | ferritic/martensitic <850 | 75 | 0.02 | 0.017 | 0.017 | 0.017 | 0.019 | 0.021 | 0.023 | 0.021 | 0.025 | 0.023 |
| 2.1 | austenitic <650 | 70 | 0.019 | 0.016 | 0.016 | 0.016 | 0.018 | 0.02 | 0.022 | 0.02 | 0.024 | 0.022 |
| 2.2 | austenitic <750 | 50 | 0.016 | 0.011 | 0.013 | 0.013 | 0.014 | 0.016 | 0.018 | 0.016 | 0.02 | 0.018 |
| 3.1 | DUPLEX STEEL super austenitic <1100 | | | | | | | | | | | |

| N | COPPER | Vc (m/min) | 120 | 0.021 | 0.018 | 0.018 | 0.018 | 0.02 | 0.022 | 0.024 | 0.022 | 0.026 | 0.024 |
|---|----------------------------|------------|-----|-------|-------|-------|-------|------|-------|-------|-------|-------|-------|
| | Tungsten Copper (WCu) <700 | | | | | | | | | | | | |

| P | STEEL | Vc (m/min) | 190 | 0.021 | 0.018 | 0.018 | 0.018 | 0.02 | 0.022 | 0.024 | 0.022 | 0.026 | 0.024 |
|---------|--------------------|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1.1 | unalloyed <500 | 180 | 0.021 | 0.018 | 0.018 | 0.018 | 0.02 | 0.022 | 0.024 | 0.022 | 0.026 | 0.024 | |
| 1.2-1.5 | unalloyed <1100 | 170 | 0.02 | 0.017 | 0.017 | 0.017 | 0.019 | 0.021 | 0.023 | 0.021 | 0.025 | 0.023 | |
| 2.1-2.2 | low-alloyed <950 | 150 | 0.02 | 0.017 | 0.017 | 0.017 | 0.019 | 0.021 | 0.023 | 0.021 | 0.025 | 0.023 | |
| 2.3-2.4 | low-alloyed <1300 | 150 | 0.019 | 0.016 | 0.016 | 0.016 | 0.018 | 0.02 | 0.022 | 0.02 | 0.024 | 0.022 | |
| 3.1-3.2 | high-alloyed <1100 | 130 | 0.016 | 0.011 | 0.013 | 0.013 | 0.014 | 0.016 | 0.018 | 0.016 | 0.02 | 0.018 | |
| 3.3 | high-alloyed <1400 | | | | | | | | | | | | |

| K | CASTINGS | Vc (m/min) | 190 | 0.021 | 0.018 | 0.018 | 0.018 | 0.02 | 0.022 | 0.024 | 0.022 | 0.026 | 0.024 |
|---------|--------------------------|------------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1.1-1.2 | Grey cast iron <1000 | 180 | 0.02 | 0.017 | 0.017 | 0.017 | 0.019 | 0.021 | 0.023 | 0.021 | 0.025 | 0.023 | |
| 2.1-2.2 | Modular cast iron <850 | 170 | 0.02 | 0.017 | 0.017 | 0.017 | 0.019 | 0.021 | 0.023 | 0.021 | 0.025 | 0.023 | |
| 3.1-3.2 | Malleable cast iron <800 | | | | | | | | | | | | |

Note | The values marked in turquoise are side applications!
Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values.

| Material | Hardness in HRC | Feed (mm/Z) | Dimension | 01.4 x16 | 01.5 x14 | 01.5 x16 | 01.6 x16 | 01.8 x16 | 02 x14 | 02 x16 | 02.5 x15 | 03 x16 |
|----------|-----------------|-------------|--------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|----------------------|
| | | | Infeed in mm | ae=0.04xD ap=0.04xD | ae=0.07xD ap=0.07xD | ae=0.05xD ap=0.05xD | ae=0.05xD ap=0.05xD | ae=0.08xD ap=0.08xD | ae=0.09xD ap=0.09xD | ae=0.08xD ap=0.08xD | ae=0.09xD ap=0.09xD | ae=0.1xD ap=0.1xD |
| | | | Application | | | | | | | | | |
| H | HARDENED STEEL | Vc (m/min) | 110 | 0.026 | 0.03 | 0.028 | 0.03 | 0.032 | 0.034 | 0.032 | 0.037 | 0.038 |
| 1.1 | 46-55 | 70 | 0.025 | 0.028 | 0.026 | 0.028 | 0.03 | 0.032 | 0.03 | 0.032 | 0.035 | 0.036 |
| 1.2 | 56-60 | 50 | 0.024 | 0.026 | 0.024 | 0.026 | 0.028 | 0.03 | 0.028 | 0.033 | 0.034 | |
| 1.3 | 60-65 | 40 | 0.02 | 0.022 | 0.021 | 0.023 | 0.025 | 0.027 | 0.025 | 0.03 | 0.031 | |
| 1.4 | 66-70 | | | | | | | | | | | |

| Material | Strength (N/mm ²) | Feed (mm/Z) | fz | fz | fz | fz | fz | fz | fz | fz | fz | fz |
|----------|---------------------------------------|-------------|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | Vc (m/min) | 90 | 0.026 | 0.03 | 0.028 | 0.03 | 0.032 | 0.034 | 0.032 | 0.037 |
| 1.1 | ferritic/martensitic <850 | 75 | 0.025 | 0.028 | 0.026 | 0.028 | 0.03 | 0.032 | 0.03 | 0.032 | 0.035 | 0.036 |
| 2.1 | austenitic <650 | 70 | 0.024 | 0.026 | 0.024 | 0.026 | 0.028 | 0.03 | 0.028 | 0.033 | 0.034 | |
| 2.2 | austenitic <750 | 50 | 0.02 | 0.022 | 0.021 | 0.023 | 0.025 | 0.027 | 0.025 | 0.03 | 0.031 | |
| 3.1 | DUPLEX STEEL super austenitic <1100 | | | | | | | | | | | |

| N | COPPER | Vc (m/min) | 120 | 0.026 | 0.03 | 0.028 | 0.03 | 0.032 | 0.034 | 0.032 | 0.037 | 0.038 |
|---|----------------------------|------------|-----|-------|------|-------|------|-------|-------|-------|-------|-------|
| | Tungsten Copper (WCu) <700 | | | | | | | | | | | |

| P | STEEL | Vc (m/min) | 190 | 0.026 | 0.03 | 0.028 | 0.03 | 0.032 | 0.034 | 0.032 | 0.037 | 0.038 |
|---------|--------------------|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1.1 | unalloyed <500 | 180 | 0.026 | 0.03 | 0.028 | 0.03 | 0.032 | 0.034 | 0.032 | 0.037 | 0.038 | |
| 1.2-1.5 | unalloyed <1100 | 170 | 0.025 | 0.028 | 0.026 | 0.028 | 0.03 | 0.032 | 0.03 | 0.032 | 0.035 | 0.036 |
| 2.1-2.2 | low-alloyed <950 | 150 | 0.025 | 0.028 | 0.026 | 0.028 | 0.03 | 0.032 | 0.03 | 0.032 | 0.035 | 0.036 |
| 2.3-2.4 | low-alloyed <1300 | 150 | 0.024 | 0.026 | 0.024 | 0.026 | 0.028 | 0.03 | 0.028 | 0.033 | 0.034 | |
| 3.1-3.2 | high-alloyed <1100 | 130 | 0.02 | 0.022 | 0.021 | 0.023 | 0.025 | 0.027 | 0.025 | 0.03 | 0.031 | |
| 3.3 | high-alloyed <1400 | | | | | | | | | | | |

| K | CASTINGS | Vc (m/min) | 190 | 0.026 | 0.03 | 0.028 | 0.03 | 0.032 | 0.034 | 0.032 | 0.037 | 0.038 |
|---------|--------------------------|------------|-------|-------|-------|-------|------|-------|-------|-------|-------|-------|
| 1.1-1.2 | Grey cast iron <1000 | 180 | 0.025 | 0.028 | 0.026 | 0.028 | 0.03 | 0.032 | 0.03 | 0.032 | 0.035 | 0.036 |
| 2.1-2.2 | Modular cast iron <850 | 170 | 0.025 | 0.028 | 0.026 | 0.028 | 0.03 | 0.032 | 0.03 | 0.032 | 0.035 | 0.036 |
| 3.1-3.2 | Malleable cast iron <800 | | | | | | | | | | | |

Note | The values marked in turquoise are side applications!
Values in the table are the shortest and the longest overhang length (L3) of each dimension; please calculate fz, ap and ae depending on the given values.

EXPLANATION

APPLICATIONS

| | | | |
|-------------------|-------------------|--------------------------------|-----------|
| Multipass milling | Trimming | Deburring | Engraving |
| Corner rounding | Full slot milling | Forward and backward deburring | |

COOLINGS


| | | | |
|------------------------------|---------------|-------------|-------------------|
| Air-cooling | Dry machining | Oil cooling | Cooling Lubricant |
| Minimum quantity lubrication | | | |

FEATURES

| | | | |
|-----------------------|-----------------------|---------------------|-----------------------|
| 2xD | 3xD | 4xD | 5xD |
| Center cutting | Non-center cutting | Without Weldon | With Weldon |
| Internal cooling | Dynamic helical pitch | Chip breaker | Unequal tooth pitch |
| Roughing teeth | Helical immersion | Feed directions x,y | Feed directions x,y,z |
| Feed directions x,y,z | | | |

STRATEGY

| | | | |
|-----------------------------|--------------------------|--------------------|--------------------|
| Extended Trochoidal Cutting | High Performance Cutting | High Speed Cutting | Multi Task Cutting |
| Universal Machining | | | |

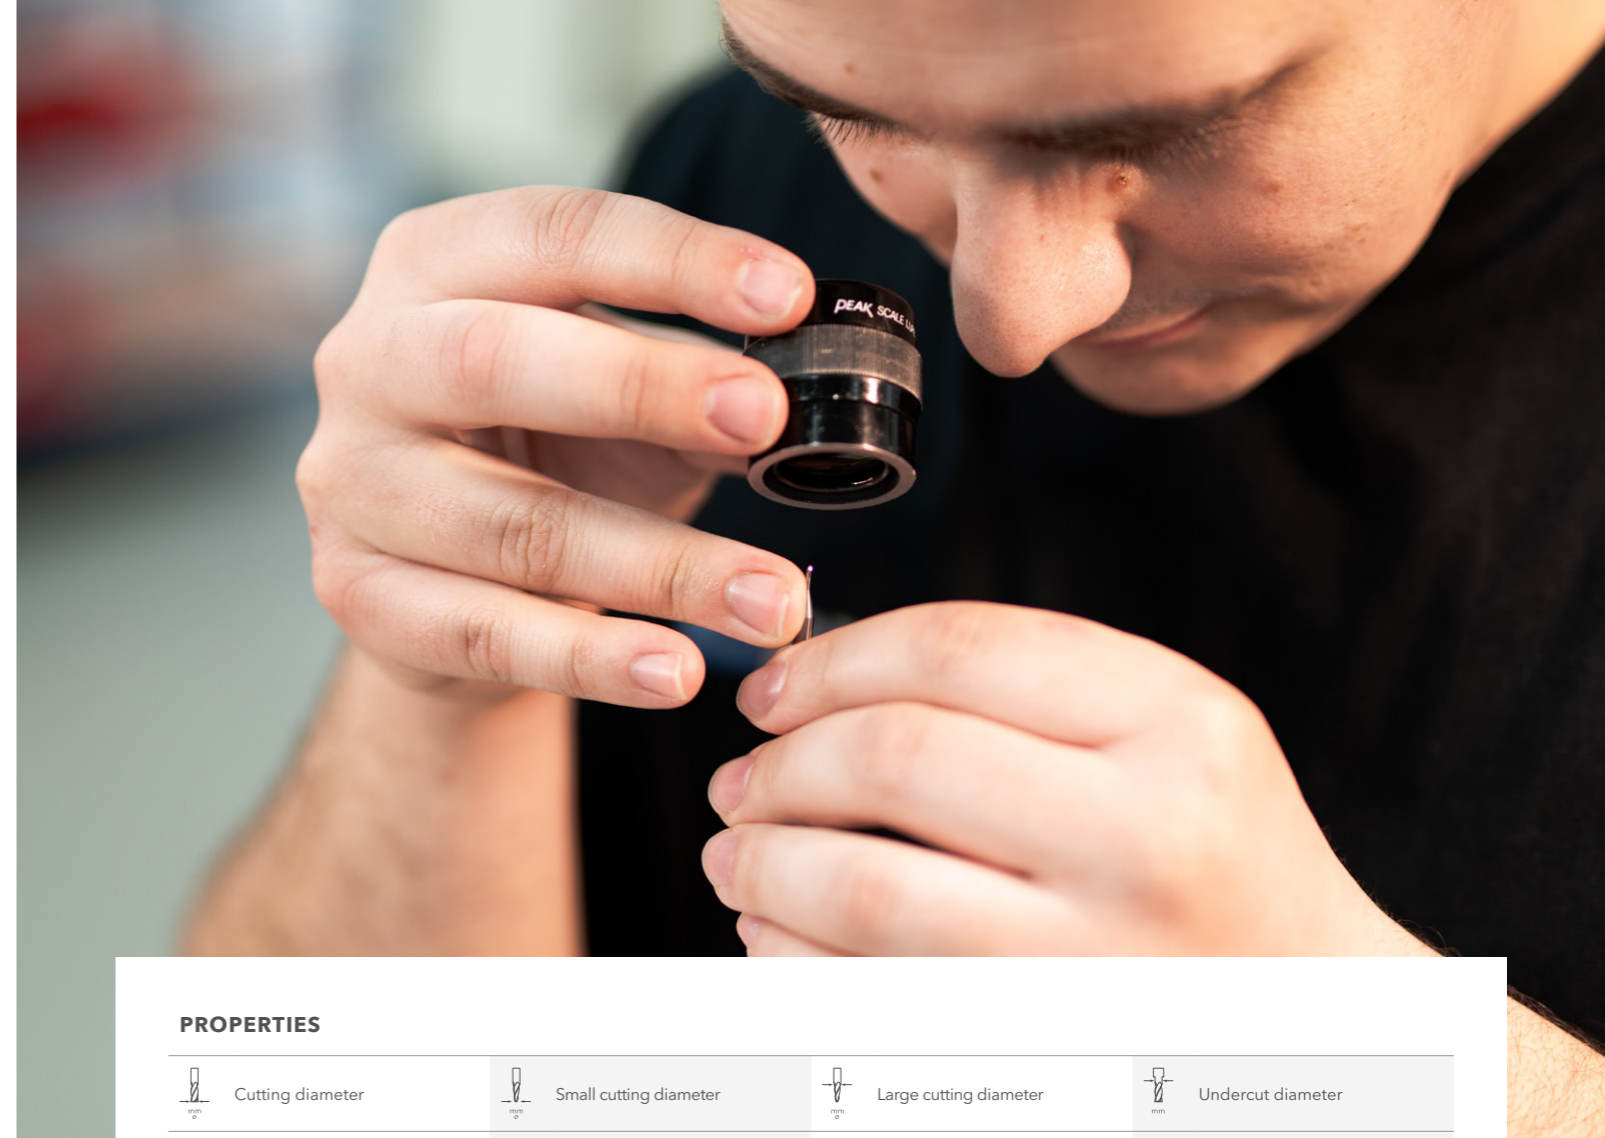

PROPERTIES

| | | | |
|--------------------|------------------------|------------------------|-------------------|
| Cutting diameter | Small cutting diameter | Large cutting diameter | Undercut diameter |
| Length of cut | Total bevel length | Undercut length | Total length |
| Shank diameter | Number of teeth | Corner radius | Corner bevel |
| Programming radius | Maximum depth of cut | Helical angle | Alpha angle |

APPLICATION TABLE

The values given in the application table are only guidelines. These values are largely dependent on the machining situation and application.

FIGURES

All technical drawings and photographs are given as an example. The product may deviate from the original in terms of colour and dimensions.

H 1.1-1.4 **HARDENED STEEL | 46-70 HRC**

| Materialnumber | Germany DIN | Europe EN | France AFNOR | Great Britain BS | Italy UNI | Sweden SIS | Spain UNE | Japan JIS | USA AISI |
|----------------|-----------------|-----------------|----------------------|--------------------|---------------------|--------------|----------------|-------------|------------|
| 1.2311 | 40CrMnMo7 | | | BP 20 | 35 CrMo 8 KU | | | | P 20 |
| 1.2312 | 40CrMnMoS86 | | 40 CMD 8 | | | | | | |
| 1.2316 | X36CrMo17 | X 36 CrMo 17 | X38CrMo 16 1 | | X 38 CrMo 16 1 KU | | X 38 CrMo 16 | | D-4 |
| 1.2365 | X32CrMoV33 | X 32CrMoV 12 28 | 32 DCV 28 | BH 10 | 30 CrMoV 12 27 KU | | F.5313 | SKD 7 | H 10 |
| 1.2567 | X30WCrV53 | X 30 WCrV 5 3 | Z 32 WCV 5 | | X 30 WCrV 5 3 KU | | | SKD 4 | |
| 1.2581 | X30WCrV93 | X 30 WCrV 9 3 | Z 30 WCV 9 | BH 21 | X 30 WCrV 9 3 KU | | X 30 WCrV 9 | SKD 5 | H 21 |
| 1.2738 | 40CrMnNiMo864 | | 40 CMND 8 | | | | F.5303 | | |
| 1.2885 | X32CrMoCoV333 | | 30 DCKV 28 | | | | | | |
| 1.4028 | X30Cr13 | X 30 Cr 13 | Z 30 Cr 13 | 420 S 45 | X 30 Cr 13 | 2304 | X 30 Cr 13 | SUS 420 J2 | 420 |
| 1.4031 | X40Cr13 | X 40 Cr 13 | Z 40 C 14 | | X 40 Cr 14 | 2304 | X 40 Cr 13 | SUS 420 | 420 |
| 1.4034 | X45Cr13 | X 45 Cr 13 | Z 40 C 14 | 420 S 45 | X 40 Cr 14 | | X 46 Cr 13 | | 420 |
| 1.4112 | X90CrMoV18 | X 90 CrMoV 18 | Z 3 CT 1 2 | 409 S 1 9 | X 6 Cr Ti 1 2 | | | SUS 440 B | 440 B |
| 1.5122 | 37 MnSi 4 | | 38 MS 5 | | | | | | |
| 1.6358 | X2NiCoMoTi 1895 | | | | | | | | |
| 1.6582 | 34CrNiMo6 | | 35 NCD 6 | 817 M 40 | 35 NiCrMo 6 (KW) | 2541 | F.1270 | SNCM 447 | 4340 |
| 1.7003 | 38 Cr 2 | | 38 C 2 | 120 M 36 | 38 Cr 2 | | F.1200 | | |
| 1.7006 | 46 Cr 2 | | 45 C 2 | | 4 5Cr 2 | | | | 5045 |
| 1.7030 | 28 Cr 4 | | | 530 A 30 | | | | | 5130 |
| 1.7176 | 55 Cr 3 | | 55 C 3 | 525 A 58 | 55 Cr 3 | 2253 | F.1431 | SUP 9 | 5155 |
| 1.0961 | 60SiCr7 | 60 SiCr 8 | 60 SC 7 | 250 A 61 | 60 SiCr 8 | | 60 SiCr 8 | SUP 7 | 9262 |
| 1.1248 | Ck 75 | | XC 75 | 060 A 78 | | 1774 | | | 1078 |
| 1.1273 | 90Mn4 | | | 060 A 96 | | | | SUP 4 | 1090 |
| 1.2083 | X42Cr13 | X 42 Cr 13 | Z 40 C 14 | | X 41 Cr 13 KU | 2314 | | SUS 420 J2 | 420 |
| 1.2323 | 48CrMoV67 | | 45 CDV 6 | | | | | | |
| 1.2343 | X38CrMoVH1 | X 38 CrMoV 5 1 | Z 38 CDV 5 | BH 11 | X 37 CrMoV 5 1 KU | | X 37 CrMoV 5 | SKD 6 | H 11 |
| 1.2367 | X38CrMoV53 | | Z 38 CDV 5 3 | | | | | | |
| 1.2510 | 100 MnCrW 4 | | 90 MWCV 5 | B0 1 | 95 MnWCr 5 KU | 2140 | F.5220 | SKS 3 | 0 1 |
| 1.2542 | 45WCrV7 | 45 WCrV 8 | | BS 1 | 45 WCrV 8 KU | 2710 | 45 WCrSi 8 | | S1 |
| 1.2550 | 60 WCrV 7 | | 55 WC 20 | | 55 WCrV 8 KU | | | | |
| 1.2606 | X37CrMoW51 | | Z 35 CWDV 5 | BH 12 | X 35 CrMoW 05 KU | | F.537 | SKD 62 | H 12 |
| 1.2711 | 54 NiCrMoV | | 55 NCDV 6 | | | | | | |
| 1.2713 | 55 NiCrMoV 6 | | 55 NCDV 7 | | | | F.520.S | SKT 4 | L 6 |
| 1.2764 | X19NiCrMo4 | | | | | | | | |
| 1.2767 | X45NiCrMo4 | 40 NiCrMo 4 | Y 35 NCD 16 | | 42 NiCrMo 15 7 KU | | | | A 9 |
| 1.4109 | X65CrMo14 | X 70 CrMo 15 | Z 70 CD 14 | | | | | SUS 440 A | 440 A |
| 1.1157 | 40Mn4 | | 35 M 5 | 150 M 36 | | | | | 1039 |
| 1.1231 | Ck 67 | | XC 68 | 060 A 67 | C 70 | 1770 | | | 1070 |
| 1.1274 | Ck 101 | | XC 100 | 060 A 96 | | 1870 | | SUP 4 | 1095 |
| 1.2080 | X210Cr12 | | Z 200 C 12 | | X 210 Cr 13 KU | | | SKD 1 | D 3 |
| 1.2101 | 62SiMnCr4 | | | | | | | | |
| 1.2162 | 21MnCr5 | 21 MnCr 5 | 20 NC 5 | | | | | SCR 420 H | |
| 1.2201 | X165CrV12 | | | | | | | | |
| 1.2210 | 115CrV3 | 107 CrV 3 KU | 100 C 3 | | 107 CrV 3 KU | | F.520.L | | L2 |
| 1.2341 | X6CrMo4 | | | | | | | | |
| 1.2379 | X155CrVMo121 | X 153 CrMoV 12 | Z 160 CDV 12 | BD 2 | X 155 CrVMo 12 1 KU | 2310 | | SKD 11 | D 2 |
| 1.2419 | 105WCr6 | 105 WCr 5 | 105 WC 13 | | 107 WeR 5 KU | 2140 | 105 WCr 5 | SKS 31 | |
| 1.2601 | X165CrMoV12 | X 165 CrMoV 12 | | | X 165 CrMoW 12 KU | 2310 | X 160 CrMoV 12 | | |
| 1.2721 | 50NiCr13 | | | | | | | | |
| 1.2735 | 15NiCr14 | | 10 NC 12 | | | | | SNC 22 | |
| 1.2833 | 100V1 | | Y1 105 V | BW 2 | 102 V 2 KU | | | SKS 43 | W 210 |
| 1.2842 | 90MnCrV8 | 90 MnV 8 | 90 MV 8 | BO 2 | 90 MnVCr 8 KU | | | | 0 2 |
| 1.3505 | 100Cr6 | | 100 C 6 | 534 A 99 | 100 Cr 6 | 2258 | F.1310 | SUJ 2 | 52100 |
| 1.4125 | X105CrMo17 | | Z 100 CD 17 | | X 105 CrMo 17 | | | SUS 440 C | 440 C |
| 1.8161 | 58CrV4 | | | | | | | | |
| 1.1520 | C70W1 | | | | | | | | |
| 1.2363 | X100CrMoV51 | X 100 CrMoV 5 1 | Z 100 CDV 5 | BA 2 | X 100 CrMoV 5 1 KU | 2260 | X 100 CrMoV 5 | SKD 12 | A 2 |
| 1.2436 | X210CrW12 | X 210 CrW 12 | Z 210 CW 1 2 | | X 215 CrW 12 1 KU | 2312 | X 210 CrW 12 | SKD 2 | |
| 1.2880 | X165CrCoMo12 | | | | | | | | |
| 1.3202 | S12145 | HS12-1-5-5 | | BT 15 | HS 12-1-5-5 | | 12-1-5-5 | | T 15 |
| 1.3207 | S104310 | HS10-4-3-10 | Z130WKCDV10-10-04-04 | BT 42 | HS 10-4-3-10 | | 10-4-3-10 | SKH 57 | M 44 |
| 1.3243 | S6525 | HS6-5-2-5 | KCV 06-05-05-04-02 | | HS 6-5-2-5 | 2723 | 6-5-2-5 | SKH 55 | M 35 |
| 1.3246 | S7425 | HS1-8-1 | Z110 WKCDV 07-05-04 | T 11341 | HS 7-4-2-5 | | 7-4-2-5 | | M 41 |
| 1.3247 | S21018 | HS2-9-1-8 | Z110 DKCWV 09-08-04 | BM 42 | HS 2-9-1-8 | | 2-10-1-8 | | M 42 |
| 1.3249 | S2928 | | | BM 34 | | | 2-9-2-8 | | |

| Materialnumber | Germany DIN | Europe EN | France AFNOR | Great Britain BS | Italy UNI | Sweden SIS | Spain UNE | Japan JIS | USA AISI |
|----------------|---------------|-------------|-----------------------|--------------------|-------------|--------------|-------------|-------------|------------|
| 1.3257 | S181215 | | | | | | | | |
| 1.3333 | S332 | HS 3-3-2 | | | | | | | |
| 1.3343 | S652 | HS6-5-3 | Z85 WDCV 06-05-04-02 | BM 2 | | | | | |
| 1.3344 | S653 | | Z120 WDCV 06-05-04-03 | | | | | | |
| 1.3346 | S291 | HS1-8-1 | Z85 DCWW 08-04-02-01 | BM 1 | | | | | |
| 1.3348 | S292 | HS2-9-2 | Z100 DCWW 09-04-02-02 | | | | | | |
| 1.3355 | S1801 | HS18-0-1 | Z80 WCV 18-04-01 | BT 1 | | | | | |
| 1.1654 | C 110 W | | | | | | | | |

Technical formulas

Calculate cutting speed (m/min)

$$V_c = \frac{D * \pi * n}{1000}$$

Explanation of terms

Vc Cutting speed in m/min

Calculate rotational speed (rpm)

$$n = \frac{V_c * 1000}{D * \pi}$$

n Rotational speed in rpm

Calculate feed rate (mm/min)

$$V_f = n * z * f_z$$

Vf Feed rate in mm/min

Calculate feed per tooth (mm/number of teeth)

$$f_z = \frac{V_f}{n * z}$$

Fz Feed per tooth in mm/number of teeth

z Number of teeth (cutting)

Calculate chip removal rate (cm³/min)

$$Q = \frac{a_p * a_e * V_f}{1000}$$

ap Depth of cut in mm

ae Width of cut in mm

hm Average chip thickness in mm

Calculate average chip thickness (mm)

$$h_m = f_z * \frac{\sqrt{a_e}}{D}$$

Q Chip removal rate in cm³/min

D Diameter of tool in mm

GENERAL TERMS OF SALE

§ 1 SCOPE

1. These General Terms of Sale apply to all business relationships between Hofmann & Vratny OHG (hereinafter referred to as “Hofmann & Vratny”) and its customers (hereinafter referred to individually as the “Ordering Party” and collectively as the “Ordering Parties”).

2. These General Terms of Sale only apply to Ordering Parties that are entrepreneurs pursuant to §§ 14 and 310 para. 1 of the BGB (Civil Code of Germany), legal entities under public law, and/or special funds under public law.

3. The scope of application of these General Terms of Sale includes, but is not limited to, contracts regarding the sale and/or delivery of chattels (hereinafter referred to as “Goods”) regardless of whether they are produced by Hofmann & Vratny or procured from suppliers (§§ 433 and 651 of the BGB). Unless agreed upon otherwise, the version of these General Terms of Sale applicable at the time the Ordering Party places an order and in any case the most recent version of these General Terms of Sale provided to the Ordering Party in writing in the form of a master agreement also shall apply to similar contracts made at a later date without Hofmann & Vratny being required to make reference to them in every individual case.

4. These General Terms of Sale shall apply exclusively. These General Terms of Sale also shall apply if and when Hofmann & Vratny executes a delivery without reservation despite having knowledge of the Ordering Party’s terms of sale which contradict or deviate from these General Terms of Sale. Any of the Ordering Party’s terms of sale which contradict or deviate from these General Terms of Sale shall become part of a contract only with Hofmann & Vratny’s express prior consent. Such requirement to consent shall apply in any case even, for example, if the Ordering Party refers to its terms of sale as part of an order placement and Hofmann & Vratny does not object explicitly to such terms.

5. If Hofmann & Vratny and the Ordering Party have entered into any individual agreements, such individual agreements shall prevail over these General Terms of Sale. The content of such individual agreements only can be substantiated by a written contract or by written confirmation from Hofmann & Vratny. Individual agreements (e.g., outline delivery contracts, quality assurance agreements) and information provided in Hofmann & Vratny’s order confirmation shall prevail over these General Terms of Sale. In case of doubt, commercial clauses shall be interpreted based on the Incoterms® issued by the International Chamber of Commerce in Paris (ICC) and applicable at the time the contract is entered into.

6. All of the Ordering Party’s legal declarations and notifications made with regard to the contract (e.g., in connection with deadlines or notices of defects, rescission, or reduction) shall be made in writing to be effective. In the context of these General Terms of Sale, in writing shall include written and text forms (e.g., letters, e-mails, faxes). Legal requirements regarding form and other verifications including, but not limited to, cases of doubt regarding the legitimation of the notifying party shall remain unaffected.

7. All references to applicable laws shall be for the purpose of clarification only. Unless amended in or excluded expressly from these General Terms of Sale, laws shall apply even without express reference.

§ 2 OFFERS AND ACCEPTANCE

1. All offers made by Hofmann & Vratny shall be subject to change and shall be non-binding including if and when images, drawings, technical documentation, calculations, analyses, other documents or product descriptions of whatever nature (hereinafter referred to as “Documents”) are provided to the Ordering Party if the proprietary rights and copyrights to those Documents are retained by Hofmann & Vratny.

2. All orders for Goods placed by the Ordering Party shall constitute binding offers. Unless stated otherwise in the respective order, Hofmann & Vratny shall be entitled to accept an offer within two weeks after receipt of said offer.

3. Hofmann & Vratny shall accept offers in writing (e.g., in the form of an order confirmation) or by delivering the respective Goods to the Ordering Party.

4. All proprietary rights and copyrights to Documents shall remain with Hofmann & Vratny. Documents marked as confidential shall be forwarded to third parties only with the express written consent of Hofmann & Vratny.

§ 3 DELIVERY DEADLINES AND DEFAULT OF DELIVERY

1. Delivery deadlines shall be agreed upon by Hofmann & Vratny and the individual Ordering Party or shall be specified by Hofmann & Vratny upon acceptance of the order or in the order confirmation.

2. Hofmann & Vratny’s compliance with delivery obligations shall be conditional upon the Ordering Party’s on-time and proper compliance with the Ordering Party’s obligations including, but not limited to, the provision of the papers, permits and approvals required to be provided by the Ordering Party and the receipt by Hofmann & Vratny of the agreed-upon down payment, if any. In the event of delays, the delivery time shall be extended reasonably.

3. If Hofmann & Vratny is unable to meet any binding delivery deadlines for reasons beyond the control of Hofmann & Vratny (non-availability of services), the Ordering Party shall be notified without undue delay and shall be provided with an estimated new delivery deadline. If the agreed upon Goods do not become available before the new deadline expires, Hofmann & Vratny shall be entitled to rescind the contract in whole or in part and shall reimburse the Ordering Party without undue delay for any and all consideration paid up to that time. For the fulfillment of this clause, non-availability of services shall include, but shall not be limited to, delayed delivery from any of Hofmann & Vratny’s suppliers for reasons beyond the control of Hofmann & Vratny or its suppliers, or if Hofmann & Vratny is not responsible for procuring the Goods.

4. If failure to comply with a delivery deadline is due to an act of God, industrial dispute or other event beyond the control of Hofmann & Vratny, the delivery time shall be extended reasonably. The same shall apply if and when any such act of God, industrial dispute or other event has arisen at any of Hofmann & Vratny’s sub-suppliers which event can be demonstrated to have had an impact on compliance with the delivery deadline. Hofmann & Vratny shall notify the Ordering Party of such circumstances without undue delay. Events also shall be deemed to be beyond Hofmann & Vratny’s control if and when they occur during a delay. In this case, the delay shall be deemed to be suspended for the duration of the respective event.

5. The beginning of a period of delivery default shall be in accordance with the law, but shall in any case require a reminder issued by the Ordering Party.

6. If a contract regarding stand-by delivery has been signed, Hofmann & Vratny shall deliver and invoice the Goods no later than 12 months after the date of such contract (hereinafter referred to as the “Recall Period”), even if the Ordering Party has failed to recall the Goods by that time. After the Recall Period has expired, Hofmann & Vratny can notify the Ordering Party of Hofmann & Vratny’s readiness to deliver and can request that the Ordering Party recall the Goods within a reasonable period of time. If the Ordering Party fails to recall the Goods within such period, Hofmann & Vratny shall be entitled to demand an additional lumpsum compensation for warehousing costs (hereinafter referred to as the “Warehousing Allowance”). The Warehousing Allowance shall be 0.5% of the net value of the purchased Goods for every full week, but shall not exceed 5% of the net value of the purchased Goods in total. The Ordering Party shall be free to prove that Hofmann & Vratny did not incur any damages or that any damages incurred were lower than the Warehousing Allowance. If the Ordering Party fails to recall the Goods within the Recall Period determined by Hofmann & Vratny, Hofmann & Vratny shall be entitled to dispose of the Goods as Hofmann & Vratny sees fit. The statutory provisions regarding rescission shall remain unaffected.

§ 4 DELIVERY AND DEFAULT OF ACCEPTANCE

1. Unless agreed upon otherwise, all deliveries shall be ex works, that is, the

place of performance for deliveries and for all subsequent actions. Unless agreed upon otherwise, upon request and at the expense of the Ordering Party the Goods shall be delivered to another destination (hereinafter referred to as “Sales Involving the Carriage of Goods”). Unless agreed upon otherwise, Hofmann & Vratny shall be entitled to determine the shipment method (including, but not limited to, the forwarder, the type of shipment and the packaging).

2. Partial deliveries shall be admissible, provided the Ordering Party reasonably can be expected to accept them.

3. Delivered Goods shall be accepted by the Ordering Party even if the delivered Goods have minor defects provided the Ordering Party reasonably can be expected to accept such Goods.

4. The risk of accidental destruction and/or deterioration of the Goods shall transfer to the Ordering Party no later than upon surrender of the Goods. In the case of Sales Involving the Carriage of Goods, the risk of accidental destruction and/or deterioration of the Goods and the risk of delay shall transfer to the Ordering Party no later than at the time of delivery of the Goods to the forwarder, carrier, or any other person designated to execute shipment of the Goods. Delivery shall be deemed to have been effected even if the Ordering Party is in default of acceptance.

5. If the Ordering Party is in default of acceptance or fails to cooperate or if delivery is delayed for other reasons for which the Ordering Party is responsible, Hofmann & Vratny shall be entitled to demand reimbursement for the damages incurred in connection therewith including additional expenses (e.g., warehousing costs).

§ 5 TERMS OF PAYMENT

1. Unless agreed upon otherwise in individual cases, Hofmann & Vratny’s prices plus statutory sales tax valid at the time the contract is signed shall apply. The prices indicated in Hofmann & Vratny’s catalogs are non-binding and subject to change and/ or correction.

2. Unless agreed upon otherwise, in the case of Sales Involving the Carriage of Goods the Ordering Party shall bear the costs of packaging and transportation ex works and the costs, if any, for transportation insurance if such insurance is requested by the Ordering Party. All customs and other fees, taxes and other public charges also shall be borne by the Ordering Party unless agreed upon otherwise. Ownership of the packaging for transportation and otherwise pursuant to the Verpackungsordnung (Packaging Ordinance of Germany) shall transfer to the Ordering Party and such packaging shall not be returned to Hofmann & Vratny. Pallets shall be exempt from this rule.

3. Unless agreed upon otherwise in the order confirmation, the purchase price plus statutory sales tax shall be due and payable without any deductions within 14 days after the date of invoicing and delivery or acceptance of the Goods. However, Hofmann & Vratny reserves the right to make full or partial deliveries against cash in advance at any time including during an ongoing business relationship. The assertion of such right shall be communicated no later than at the time the order confirmation is issued. The Ordering Party shall be deemed to be in default of payment upon the expiration of the aforementioned payment deadline. The applicable rate of interest on the purchase price of the Goods shall become payable during the default period. The right to assert claims for more substantial compensation shall be reserved. Hofmann & Vratny’s right to claim commercial-rate default interest (§ 353 of the HGB) shall remain unaffected.

4. The Ordering Party’s rights of set-off and retention shall be limited to the extent the Ordering Party’s claim is determined in a court of law or is undisputed. The Ordering Party’s rights based on defects in the purchased Goods (see § 7 hereof) shall remain unaffected.

5. After the contract has been signed, if there is evidence that Hofmann & Vratny’s claim to the purchase price will be compromised due to lack of performance on the part of the Ordering Party, Hofmann & Vratny shall be entitled to refuse performance pursuant to the applicable laws and, after setting a deadline, if applicable, shall be entitled to rescind the contract. In the case of contracts regarding the production of customized items, Hofmann & Vratny shall be entitled to rescind the contract immediately and the laws regarding the expendability of setting deadlines shall remain unaffected.

§ 6 RETENTION OF TITLE

1. Until all pending and future receivables in connection with the business relationship between Hofmann & Vratny and the Ordering Party are paid in full, Hofmann & Vratny shall retain ownership of the Goods. If the Ordering Party violates the contract including, but not limited to, default of payment, Hofmann & Vratny shall be entitled to rescind the contract pursuant to the applicable laws and to demand the surrender of the Goods.

2. Goods subject to retention of title shall not be pledged or assigned as collateral before the Ordering Party has paid in full. The Ordering Party shall notify Hofmann & Vratny in writing without undue delay in the event of a filing for commencement of insolvency proceedings or if third parties gain access (e.g., seizures) to Goods belonging to Hofmann & Vratny.

3. If the Ordering Party violates the contract including, but not limited to, by failing to pay the purchase price when due, Hofmann & Vratny shall be entitled to rescind the contract pursuant to the applicable laws and to demand the surrender of the Goods due to the retention of title and the rescission.

4. Until further notice, the Ordering Party shall be entitled to resell/and or process in the ordinary course of business any Goods subject to retention of title. In this case, the provisions below also shall apply.

a) The retention of title shall include title to the full value of work products resulting from processing, mixing or combining the Goods, in which case Hofmann & Vratny shall be deemed to be the manufacturer. If and when third-party goods are processed, mixed or combined and such third parties retain ownership, Hofmann & Vratny shall acquire coownership pro rata of the invoiced value of work products so processed, mixed or combined. In all other cases, the creation of work products shall be subject to the same provisions as the delivered Goods subject to retention of title.

b) The Ordering Party hereby agrees to assign to Hofmann & Vratny as collateral any and all receivables against third parties resulting from the resale of the Goods or work results in full or in the amount of Hofmann & Vratny’s estimated share of co-ownership pursuant to a) above, and Hofmann & Vratny hereby accepts such assignment. The Ordering Party’s obligations under § 6 2) hereof also shall apply with respect to the receivables assigned.

c) In addition to Hofmann & Vratny, the Ordering Party shall remain authorized to collect receivables. Hofmann & Vratny undertakes to refrain from collecting receivables as long as the Ordering Party meets its payment obligations vis-à-vis Hofmann & Vratny and does not fail to perform and Hofmann & Vratny does not assert its retention of title by asserting a right under § 6 3) hereof. Otherwise, Hofmann & Vratny shall be entitled to demand that the Ordering Party inform Hofmann & Vratny of such receivables assigned and of the names of the debtors, provide Hofmann & Vratny with all the information required for collecting such receivables and the pertinent documents, and inform the debtors (third parties) of the assignment. In addition, in this case Hofmann & Vratny shall be entitled to revoke the Ordering Party’s authorization to resell and/or process Goods which are subject to retention of title.

5. Upon request of the Ordering Party, Hofmann & Vratny shall release the collateral to which Hofmann & Vratny is entitled insofar as the realizable value of such collateral exceeds the receivables to be collateralized by more than 10 percent. Hofmann & Vratny shall be free in its decision regarding which collateral to release.

§ 7 LIABILITY FOR DEFECTS AND CLAIMS FOR DEFECTS

1. Unless otherwise agreed upon herein, the Ordering Party’s rights based on defects in quality and/or in title (including delivery of the wrong Goods or insufficient amounts, improper assembly/installation, or incomplete instructions) shall be subject to the applicable laws. The special legal stipulations regarding reimbursement of expenses at the time of delivery of newly produced Goods (supplier’s recourse as specified in §§ 478, 445a, 445b and §§ 445c, 327 para. 5, 327u of the BGB) shall remain unaffected in any case, unless equal-value compensation has been agreed upon, for example, as part of a quality assurance agreement.

2. Hofmann & Vratny’s liability for defects shall be based first and foremost on the respective agreement entered into regarding the quality and the postulated use of the Goods (including fittings and instructions). In this context,

an agreement regarding the quality of Goods shall be any and all product descriptions and manufacturer-provided information outlined in the individual agreement or made publicly known by Hofmann & Vratny (including, but not limited to, in catalogs or on Hofmann & Vratny's internet homepage) at the time the contract was signed. However, if and when no agreement regarding quality has been entered into, the presence or absence of a defect shall be determined based on the legal regulations (§ 434 para. 3 of the BGB). Statements made publicly by the manufacturer or on the manufacturer's behalf including, but not limited to, in advertising materials or on labels on the Goods shall prevail over other third parties' statements. In the case of Goods comprising digital elements or other digital content, Hofmann & Vratny shall be responsible for providing and, if required, updating the digital content only if defined expressly in an agreement regarding the quality of Goods, as stipulated above. Hofmann & Vratny shall not assume any liability for public statements made by the manufacturer or other third parties.

3. Hofmann & Vratny shall not assume liability for any defects of which the Ordering Party is aware, or for any defects of which the Ordering Party is grossly negligent if it is not aware (§ 442 of the BGB) at time the contract is signed. The assertion of claims by the Ordering Party regarding defects shall be conditional upon the Ordering Party's meeting of its statutory duty to inspect and to give notice of defects (§§ 377 and 381 of the HGB (Commercial Code of Germany)). If a defect in the Goods becomes apparent during or after inspection, the Ordering Party shall give written notice to Hofmann & Vratny without undue delay. Regardless of the Ordering Party's duty to inspect and to give notice of defects, the Ordering Party shall give written notice of obvious defects within two weeks after delivery, which notice shall be deemed to have been given in a timely manner if it is transmitted before the end of such period. If the Ordering Party fails to inspect the Goods properly and/or to give proper notice of any defects, Hofmann & Vratny shall not assume liability for any defects for which no notice was given.

4. If any of the Goods are defective, Hofmann & Vratny shall be free to offer supplementary action to remedy the defect or defects (supplementary remedy) or to deliver defect-free Goods (replacement) to the Ordering Party. In individual cases, the Ordering Party may refuse a supplementary action selected by Hofmann & Vratny that the Ordering Party considers to be unreasonable. It is Hofmann & Vratny's right to refuse to offer supplementary action under the applicable laws shall remain unaffected. The requirement for Hofmann & Vratny to provide any supplementary action owed shall be conditional upon the Ordering Party's paying of the purchase price when due. However, the Ordering Party shall be entitled to retain a reasonable portion of the purchase price pro rata in consideration of the defect. The Ordering Party shall give Hofmann & Vratny the time and the opportunity to provide the supplementary action owed including, but not limited to, providing Hofmann & Vratny the opportunity to inspect the Goods which are subject to complaint. If Hofmann & Vratny opts to replace the Goods, at Hofmann & Vratny's request the Ordering Party shall return the defective Goods to Hofmann & Vratny in accordance with the applicable laws; however, the Ordering Party shall not have the right to request to return the defective Goods. Supplementary action shall not include the disassembly, removal, or de-installation of defective Goods nor the assembly, mounting, or installation of defect-free Goods, provided Hofmann & Vratny was not originally obligated to provide such services; any rights the Ordering Party may have to be reimbursed for such costs (hereinafter referred to as "Disassembly and Assembly Costs") shall remain unaffected.

5. If in fact a defect is present, any and all expenses incurred in connection with inspections and supplementary action including, but not limited to, transportation, road, labor and material costs, and Disassembly and Assembly Costs shall be borne by Hofmann & Vratny in accordance with the laws and these General Terms of Sale. However, if the Ordering Party's demand for remedy of a defect is proven to be invalid because the Ordering Party was aware or was grossly negligent if it was not aware that no defect actually was present, Hofmann & Vratny can demand reimbursement from the Ordering Party for any costs incurred therewith. If the costs of supplementary remedy would be disproportionately high, the Ordering Party shall not be entitled to claim remedy of defects.

6. If and when a reasonable deadline for supplementary action set by the buyer has expired unsuccessfully or can be disregarded under the law, the Ordering Party can rescind the purchasing contract in accordance with the law or reduce the purchase price. However, no right to rescind shall apply in the case of insignificant defects.

7. The Ordering Party's claims for damages or reimbursement for wasted expenses shall be limited by the provisions of § 8 below and shall be excluded in all other cases.

8. The statute of limitations for claims for defects in quality and in title shall be one year after delivery of the Goods. The statute of limitations shall commence upon delivery of the Goods provided acceptance has been agreed upon. Other special legal stipulations regarding statutes of limitations (including, but not limited to, § 438 para. 1 no. 1, no. 2, para. 3, §§ 444, 445b of the BGB) shall remain unaffected. The aforementioned statutes of limitations specified in the purchasing laws also shall apply to any contractual and extra-contractual claims for reimbursement made by the Ordering Party based on a defect in the Goods, unless applying the regular statute of limitations stipulated by law (§§ 195, 199 of the BGB) would result in a reduced statute of limitations in individual cases. Any claims for reimbursement the Ordering Party may have pursuant to § 8 para. 2 p. 1 and p. 2 (a) and pursuant to the Produkthaftungsgesetz (Product Liability Act of Germany) shall be subject exclusively to the statutes of limitations stipulated by law.

§ 8 OTHER LIABILITIES

1. Unless agreed upon otherwise in these General Terms of Sale and in the provisions below, Hofmann & Vratny's liability for breach of contractual and non-contractual obligations shall be in accordance with the applicable laws.

2. Hofmann & Vratny's liability for damages, regardless of the legal reasons and of whether or not they are known, as part of Verschuldenshaftung (liability arising from damage caused by negligent act) shall include intent and gross negligence. Subject to the limitations of liability stipulated by law (e.g., diligence with its own affairs, insignificant breach of duty), in the event of minor negligence Hofmann & Vratny's liability shall be limited to (a) damages resulting from harm to life, body or health and/or (b) damages resulting from the not-insignificant breach of a material contractual obligation, that is, an obligation which must be met to make the proper fulfillment of the contract possible and the meeting of which the Ordering Party relies upon and can rely upon on a regular basis. In this case, however, Hofmann & Vratny's liability shall be limited to reimbursement of the foreseeable damages typical in such cases.

3. The limitation of liability specified above also shall apply vis-à-vis third parties and in the event of a breach of duty by any person (including to his/her own benefit) for which Hofmann & Vratny is responsible by law; however, it shall not apply if and when Hofmann & Vratny is found to have failed to disclose a defect maliciously or has assumed a guarantee for the quality of the Goods and for the Ordering Party's claims under the Produkthaftungsgesetz.

4. The Ordering Party can rescind or cancel a contract due to a breach of obligation other than a breach based on a defect only if and when Hofmann & Vratny is responsible for such breach of obligation. The Ordering Party shall not have an unrestricted right to terminate a contract. All other cases shall be subject to the applicable laws and legal consequences.

§ 9 APPLICABLE LAW AND JURISDICTION

1. These General Terms of Sale and all legal relationships between Hofmann & Vratny and the Ordering Party shall be subject to the laws of the Federal Republic of Germany under exclusion of the provisions of uniform international law. The CISG shall not apply.

2. Any and all disputes arising directly or indirectly from the contractual relationship shall be subject exclusively, including at an international level, to the jurisdiction of Aßling if the Ordering Party is a businessperson as defined in the Handelsgesetzbuch (Commercial Code of Germany), a legal entity under public law, or a special fund under public law. The same shall apply if the Ordering Party is an entrepreneur pursuant to §§ 14 of the BGB. However, in any case Hofmann & Vratny shall be entitled to sue the Ordering Party at the place of performance of the obligation to deliver under these General Terms of Sale and/or under a prevailing individual agreement or at the Ordering Party's general jurisdiction. Prevailing legal regulations including, but not limited to, regarding exclusive jurisdictions, shall remain unaffected.

Hofmann & Vratny OHG
June 2022

CONTACT HOFMANN & VRATNY

Hofmann & Vratny OHG - Headquarters

Steinkirchen 4½

85617 Aßling

Telephone: +49 80 92 / 85 333-0

E-Mail: info@vhmhv.de

Hofmann & Vratny OHG - Regrinding centre

Poststr. 15

90471 Nürnberg

Telephone: +49 80 92 / 85 333-152

E-Mail: nbg@vhmhv.de

A RELIABLE PARTNER

DISCOVER OUR H&V PRODUCT RANGE.

Our goal is to provide companies around the world with the best tools.

We are constantly developing our product portfolio. We experiment with new geometries, coatings and materials at our research and development center to make the right milling cutters for every application.


SCAN THE QR CODE NOW



EXPERT | Non-ferrous materials




EXPERT | Steel & cast iron



EXPERT | Stainless steel



EXPERT | Titanium



BASIC | Universal





EN

HOFMANN & VRATNY HARDENED STEEL-BROCHURE

Hofmann & Vratny OHG
Steinkirchen 4½
85617 Aßling

Telephone: +49 80 92 / 85 333-0
E-Mail: info@vhmhv.de
Web: www.vhmhv.de



OFFICIAL PARTNER OF H&V

