
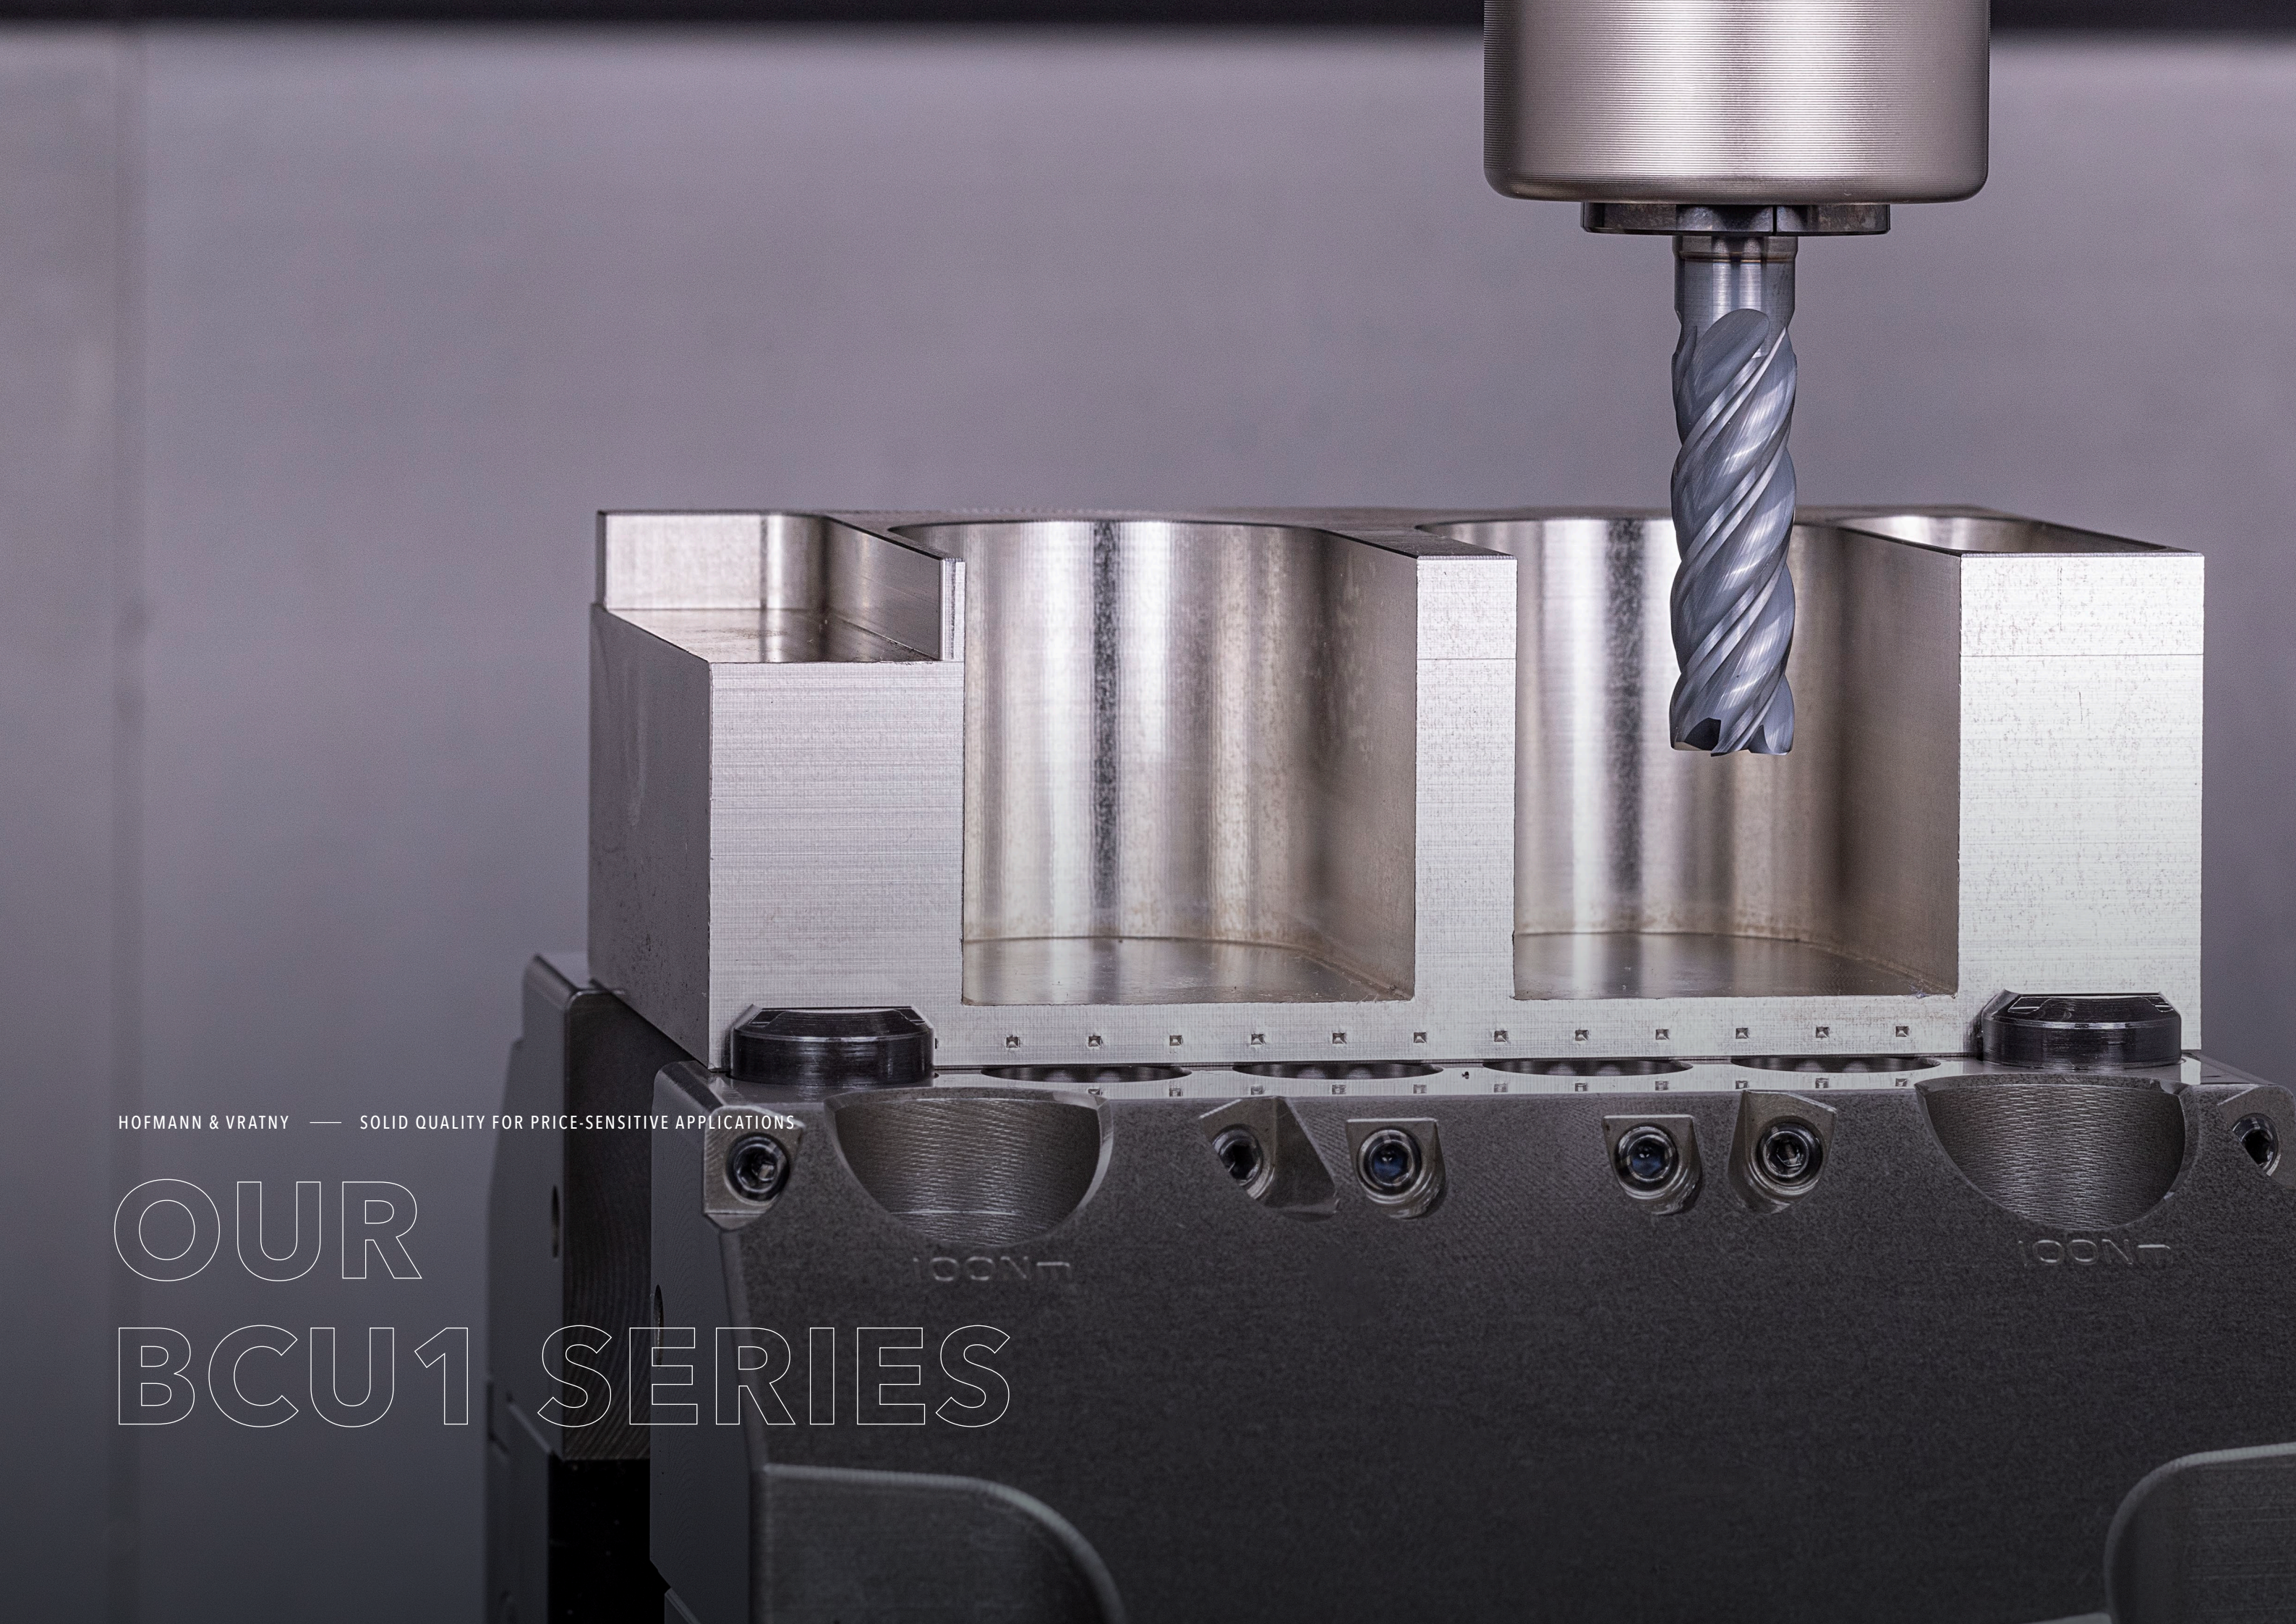


HOFMANN & VRATNY — BCU1 SERIES — UNIVERSAL MACHINING EN

BCU1 SERIES





HOFMANN & VRATNY — SOLID QUALITY FOR PRICE-SENSITIVE APPLICATIONS

OUR BCU1 SERIES

THE RIGHT TOOL. AT ALL TIMES.

Welcome to Hofmann & Vratny. As leading manufacturer of solid carbide tools, we enable companies throughout the world to manufacture their products.

Every day, our strong team works on our collective goal of producing the best tools in the world. Companies from the medical industry, semi-conductor industry, machine and plant construction, aviation, aerospace engineering and, not least, the automotive industry have been using our milling cutters for decades now. Quality – Made in Bavaria.

The success of our company is built on innovation, a culture of cooperation, open interaction with high respect and many years of successful and trustful collaboration with our business partners. You can always count on us, our tools and our irrepressible drive to shape the future of the industry together. To us, that means shaping tomorrow.



Andreas Vratny



Zdenek Vratny



Marius Heinemann-Grüder



OUR
BCU1 SERIES

50
YEARS OF
EXPERIENCE

2 Mio.
TOOLS
PRODUCED
EVERY YEAR

MILLING CUTTERS



**MADE IN
BAVARIA**

PROVEN QUALITY

DRILLS



**MADE IN
CZECHIA**

PROVEN QUALITY

- Manufacturer of solid carbide cutting tools for a wide range of materials
- Founded 1976
- 2 locations in Bavaria and 1 location in Czechia
- Headquarters with milling cutter production in Aßling near Munich
- Regrinding center in Nuremberg
- Location with drill production in Ivančice near Brno



BEHIND THE SCENES

PRODUCTION ENVIRONMENT: ALWAYS UP TO DATE



On a production area of 3,751m², we produce around 2 million tools per year. In order to guarantee the precise manufacture of our tools, our clean production halls are kept at a constant temperature of 24 °C.

PLANT FOR MACRO TOOLS

- Manufacturing of diameter 8 - 32 mm
- Use of 5 & 6-axis CNC grinding machines with 12-position grinding wheel changer enable us to manufacture complex tool geometries
- Radius tolerance of less than 5 µm
- Laser micrometer with measuring ranges up to 50 mm covers a wide product range

PLANT FOR MICRO TOOLS

- Manufacturing from diameter 0.1 - 6 mm
- Use of 5 & 6-axis CNC grinding machines especially with linear and hydrostatic technology
- Tolerances are 3 µm for concentricity and radii and 5 µm for diameter
- CNC measuring machines for recording and measuring the smallest geometries up to 0.1 mm diameter

PLANT FOR SC DRILLS

- Production of standard and special drills
- Use of 5 & 6-axis grinding machines with steady rest
- Measuring technology for particularly long tools

DEPARTMENT FOR SPECIAL TOOLS

- Production of a wide range of semi-standard and special tools
- The delivery times for the special milling cutters are as follows:
 - 3 weeks uncoated
 - 4 weeks coated
 - 6 weeks diamond-coated

REGRINDING CENTRE

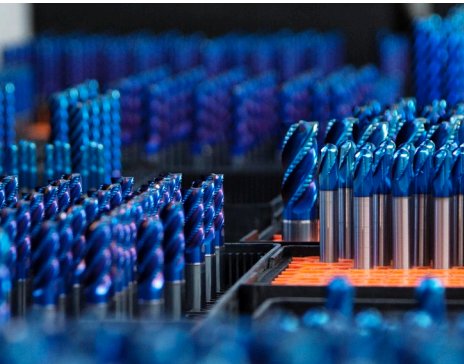
- Original reconditioning of Hofmann & Vratny tools
- Regrinding of third-party tools
- The delivery times for reground tools are as follows:
 - without colour coating: 21 calendar days
 - with colour coating: 28 calendar days

RESEARCH & DEVELOPMENT: THE ORIGIN OF OUR INNOVATIONS



In our R&D department, we develop various milling cutter geometries and work together with our partners on innovative coatings and high-performance substrates. Furthermore, on a total of four CNC milling machines, our milling cutters and those of our competitors are tested here every day in order to develop our tools in the best possible way for state-of-the-art production processes.

WAREHOUSE & LOGISTICS: SHIPPING TOGETHER



Through our global partner and trading network, we supply the manufacturing industries worldwide and work hand in hand to develop tools that meet customer requirements and market demands. In our warehouse and logistics department, our tools go through a multi-stage process every day to ensure that they reach the customer in perfect condition. With a stock availability of over 98.5 %, we guarantee same-day dispatch for orders received by 3 pm.

PEOPLE ARE THE CENTRE OF ALL OUR ACTIVITIES



Every day, our team makes a significant contribution to the success of our company, which is why it is all the more important to us that our employees feel comfortable and enjoy their work alongside their day-to-day tasks. To contribute to the well-being of our employees, we offer:

- a daily free hot lunch in our canteen
- free hot and cold drinks
- many social benefits

WOULD YOU LIKE TO GET YOUR OWN IMPRESSION OF US?

Then come and visit us with our partner.

GET EVEN MORE INSIGHTS
BEHIND THE SCENES:



OUR BCU1 SERIES

TABLE OF CONTENTS

OUR BCU1 SERIES	14
THE BCU1 SERIES AT A GLANCE	16
THE BCU1 SERIES IN COMPARISON TO OUR EXPERT SERIES	24
COMPARISON WITH THE COMPETITION - COREMAKER Z2 5XD IC BUI (DRILLING IN V2A)	26
COMPARISON WITH THE COMPETITION - COREMAKER Z2 5XD IC BUI (DRILLING IN 42CrMo4)	28
COMPARISON WITH THE COMPETITION - COREMAKER Z2 5XD IC BUI (DRILLING IN ST52-3)	30
BETAUNI IRON - VERSATILE COATING FOR A WIDE RANGE OF APPLICATIONS	32
DIGITAL SERVICES	34
NUMBERING SYSTEM	35
EXPLANATION OF CUTTING DATA	36

BCU1-M01 PERFORMMAKER | END MILL CUTTER

BCU1-M01-0103 BCU1 Performmaker Z3 1.5xD BUI	38
BCU1-M01-0104 BCU1 Performmaker Z3 1.5xD BUI	40
BCU1-M01-0113 BCU1 Performmaker Z3 2xD BUI	42
BCU1-M01-0114 BCU1 Performmaker Z3 2xD BUI	44
BCU1-M01-0123 BCU1 Performmaker Z3 3xD BUI	46
BCU1-M01-0124 BCU1 Performmaker Z3 3xD BUI	48
BCU1-M01-0203 BCU1 Performmaker Z4 1.5xD BUI	50
BCU1-M01-0204 BCU1 Performmaker Z4 1.5xD BUI	52
BCU1-M01-0213 BCU1 Performmaker Z4 2xD BUI	54
BCU1-M01-0214 BCU1 Performmaker Z4 2xD BUI	58
BCU1-M01-0223 BCU1 Performmaker Z4 3xD BUI	62
BCU1-M01-0224 BCU1 Performmaker Z4 3xD BUI	64
BCU1-M01-0313 BCU1 Performmaker Z5 2xD BUI	66
BCU1-M01-0314 BCU1 Performmaker Z5 2xD BUI	68
BCU1-M01-0413 BCU1 Performmaker Z4 2xD long BUI	70
BCU1-M01-0414 BCU1 Performmaker Z4 2xD long BUI	72



BCU1-M02 SLOTMAKER | ROUGHING CUTTER

BCU1-M02-0103	BCU1 Slotmaker Z4 2xD BUI	74
BCU1-M02-0104	BCU1 Slotmaker Z4 2xD BUI	76
BCU1-M02-0113	BCU1 Slotmaker Z4 3xD BUI	78
BCU1-M02-0114	BCU1 Slotmaker Z4 3xD BUI	80



BCU1-M03 CHIPMAKER | TROCHOIDAL CUTTER

BCU1-M03-0123	BCU1 Chipmaker Z5 3.5xD BUI	82
BCU1-M03-0124	BCU1 Chipmaker Z5 3.5xD BUI	84



BCU1-M04 MIRRORMAKER | FINISHING CUTTER

BCU1-M04-0123	BCU1 Mirrmaker Z5 3,5xD BUI	86
---------------	-----------------------------	----



BCU1-M06 FORMMAKER | TORUS CUTTER

BCU1-M06-0123	BCU1 Formmaker Z4 2xD BUI	88
BCU1-M06-0124	BCU1 Formmaker Z4 2xD BUI	92



BCU1-M08 ROWMAKER | FULL RADIUS CUTTER

BCU1-M08-0053	BCU1 Rowmaker Z2 1xD short BUI	96
BCU1-M08-0063	BCU1 Rowmaker Z2 1xD long BUI	98
BCU1-M08-0073	BCU1 Rowmaker Z2 1xD overlong BUI	100



BCU1-M09 CHAMFMAKER | DEBURRING CUTTER

BCU1-M09-0103	BCU1 Chamfmaker Z3-4 60° BUI	102
BCU1-M09-0104	BCU1 Chamfmaker Z4 60° BUI	104
BCU1-M09-0153	BCU1 Chamfmaker Z3-4 90° BUI	106
BCU1-M09-0154	BCU1 Chamfmaker Z4 90° BUI	108
BCU1-M09-0203	BCU1 Chamfmaker Z4 60° BUI	110
BCU1-M09-0204	BCU1 Chamfmaker Z4 60° BUI	112
BCU1-M09-0253	BCU1 Chamfmaker Z4 90° BUI	114
BCU1-M09-0254	BCU1 Chamfmaker Z4 90° BUI	116



BCU1-M10 FB-CHAMFMAKER | FORWARD AND BACKWARD DEBURRING CUTTER

BCU1-M10-0023	BCU1 FB-Chamfmaker Z4 90° BUI	118
BCU1-M10-0123	BCU1 FB-Chamfmaker Z4 90° BUI	120



BCU1-M11 ROUNDMAKER | CORNER ROUNDING CUTTER

BCU1-M11-0023	BCU1 Roundmaker Z4 BUI	122
---------------	------------------------	-----



BCU1-M12 FB-ROUNDMAKER | FORWARD AND BACKWARD CORNER ROUNDING CUTTER

BCU1-M12-0023	BCU1 FB-Roundmaker Z4 BUI	124
---------------	---------------------------	-----



BCU1-M13 TEXTMAKER | ENGRAVING CUTTER

BCU1-M13-0123 | BCU1 Textmaker Z2 BUI 126



BCU1-M26 SMOOTHMAKER | BALL CUTTER

BCU1-M26-0123 | BCU1 Smoothmaker Z2 260° BUI 128



BCU1-M27 BEVELMAKER | CHAMFER CUTTER

BCU1-M27-0123 | BCU1 Bevelmaker Z2 60° BUI 130



BCU1-M27-0143 | BCU1 Bevelmaker Z2 90° BUI 132



BCU1-D01 COREMAKER | SPIRAL DRILL

BCU1-D01-0213 | BCU1 Coremaker Z2 3xD IC BUI 134



BCU1-D01-0214 | BCU1 Coremaker Z2 3xD IC BUI 140



(BCU1-D01-0215) | BCU1 Coremaker Z2 3xD IC BUI 146



BCU1-D01-0223 | BCU1 Coremaker Z2 5xD IC BUI 152



BCU1-D01-0224 | BCU1 Coremaker Z2 5xD IC BUI 158



(BCU1-D01-0225) | BCU1 Coremaker Z2 5xD IC BUI 164



BCU1-D01-0233 | BCU1 Coremaker Z2 8xD IC BUI 170



BCU1-D01-0234 | BCU1 Coremaker Z2 8xD IC BUI 176



(BCU1-D01-0235) | BCU1 Coremaker Z2 8xD IC BUI 182



EXPLANATION 188

MATERIAL OVERVIEW 190

TECHNICAL FORMULAS 201

CONVERSION TABLE STRENGTH HARDNESS 202

GENERAL TERMS OF SALE 203

DISCOVER OUR H&V PRODUCT RANGE 207

OUR BCU1 SERIES

Solid quality for price-sensitive applications



A SPECIAL EDGE PREPARATION PROCESS ENSURES:

- Entirely homogeneous cutting edges
- Even distribution of cutting forces
- Improved surface quality of the component
- Controlled and even wear



EXPERIENCE OUR
BCU1 SERIES IN ACTION



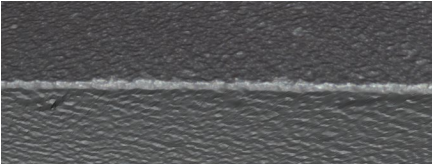
OUR BCU1 SERIES PERFORMS WELL
IN ALL AREAS OF APPLICATION.

Our H&V BCU1 Series is a very attractively priced supplement to our Expert product line, specially designed for universal machining.


The geometry, material and coating are optimised to ensure an attractive price/performance ratio. Therefore, our tools are ideal for price-conscious users in almost all areas of application.



- Versatile application thanks to tried-and-tested geometries
- Stable universal coating for machining, even suitable for the most demanding materials in roughing and finishing
- Special fine grain substrate for reduced cracking and improved resistance to cutting edge breakouts

BEFORE EDGE PREPARATION



AFTER EDGE PREPARATION

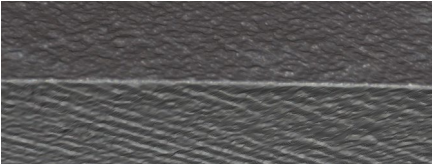


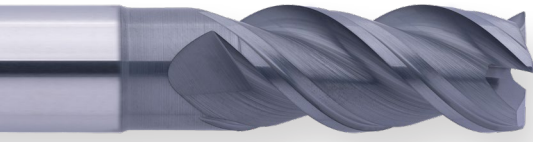

BASIC U1 PERFORMMAKER (M01) Z3

▶ IN ACTION
VIDEO▶ IN ACTION
VIDEO

- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- Large chip chambers for good chip disposal
- Available in 1.5xD, 2xD and 3xD
- Available as HA and HB
- With BUI coating



BASIC U1 PERFORMMAKER (M01) Z4

▶ IN ACTION
VIDEO▶ IN ACTION
VIDEO

- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- Large chip chambers for good chip disposal
- Available in 1.5xD, 2xD and 3xD as well as in 2xD as long version
- Available as HA and HB
- With BUI coating

BASIC U1 PERFORMMAKER (M01) Z5


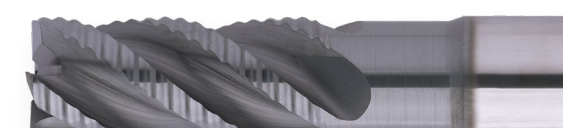
- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- 5 cutting edges for high feed rates
- Available in 2xD
- Available as HA and HB
- With BUI coating

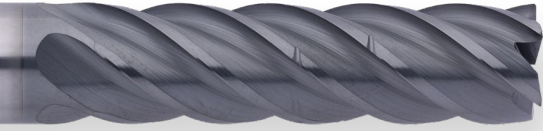


BASIC U1 SLOTMAKER (M02) Z4

▶ IN ACTION
VIDEO▶ IN ACTION
VIDEO



- Optimised chip chambers for a large chip volume,
for example with full slot milling
- Adapted roughing teeth for small chips
- Available in 2xD and 3xD
- Available as HA and HB
- With BUI coating





BASIC U1 CHIPMAKER (M03) Z5

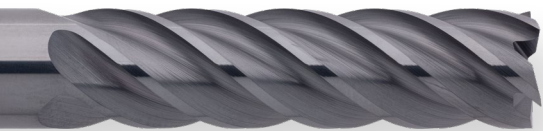- Suitable for roughing and finishing due to adapted chipbreaker arrangement
- Large chip chambers for good chip disposal
- Unequal tooth pitch for smooth running
- Available in 3.5xD
- Available as HA and HB
- With BUI coating




BASIC U1 MIRRORMAKER (M04) Z5

- 5 cutting edges for solid finishing surfaces in various materials
- Unequal tooth pitch for smooth running
- Chip chambers designed for long chips
- Available in 3.5xD
- Available as HA
- With BUI coating




BASIC U1 FORMMAKER (M06) Z4

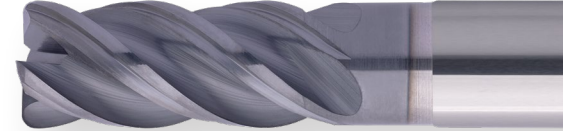- With large corner radii for contour milling
- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- Large chip chambers for good chip disposal
- Available in 2xD
- Available as HA and HB
- With BUI coating



BASIC U1 ROWMAKER (M08) Z2

- Geometry of the face cutting edge designed for a smooth and even cut
- Adapted chip chambers for roughing and finishing
- Suitable for wet and dry processing
- Available in 1.5xD in short, long and overlong versions
- Available as HA
- With BUI coating






BASIC U1 CHAMFMAKER (M09) Z3-4

- For universal chamfering of components
- Designed for contouring
- Available in 60° and 90°
- Available as HA and HB
- With BUI coating



BASIC U1 FB CHAMFMAKER (M10) Z4

- For universal chamfering of components
- Designed for contouring
- Forward and backward cutting
- grounded from mold blank and round bar available
- Available as HA
- With BUI coating




BASIC U1 ROUNDMAKER (M11) Z4

- For the universal production of radii on components
- Deburring edges with contours
- Available as HA
- With BUI coating



BASIC U1 FB ROUNDMAKER (M12) Z4

- For universal attachment of radii to components
- Narrow tolerance for high dimensional accuracy
- Forward and backward cutting
- Available as HA
- With BUI coating





BASIC U1 TEXTMAKER (M13) Z2

- For universal engraving and labelling
- Rounded tip for a longer tool life
- Available as HA
- With BUI coating



BASIC U1 SMOOTHMAKER (M26) Z2

- For universal forward and backward deburring of components
- Thanks to 260° cutting edge suitable for undercut machining
- Available as HA
- With BUI coating



BASIC U1 BEVELMAKER (M27) Z2

- Universal tool for spot drilling, countersinking, deburring and centring in various materials
- Available in 60° and 90°
- Available as HA
- With BUI coating



BASIC U1 COREMAKER (D01) Z2

- Versatile universal geometry
- Double-guided chip space for ideal chip evacuation
- Polished surfaces for minimised frictional resistance
- Available in 3xD, 5xD and 8xD
- Available from stock as HA and HB as well as HE on order (stock rework)
- With BUI coating



Specially curved face cutting edge for higher feed rates and secure centring

In all dimensions with twisted internal cooling

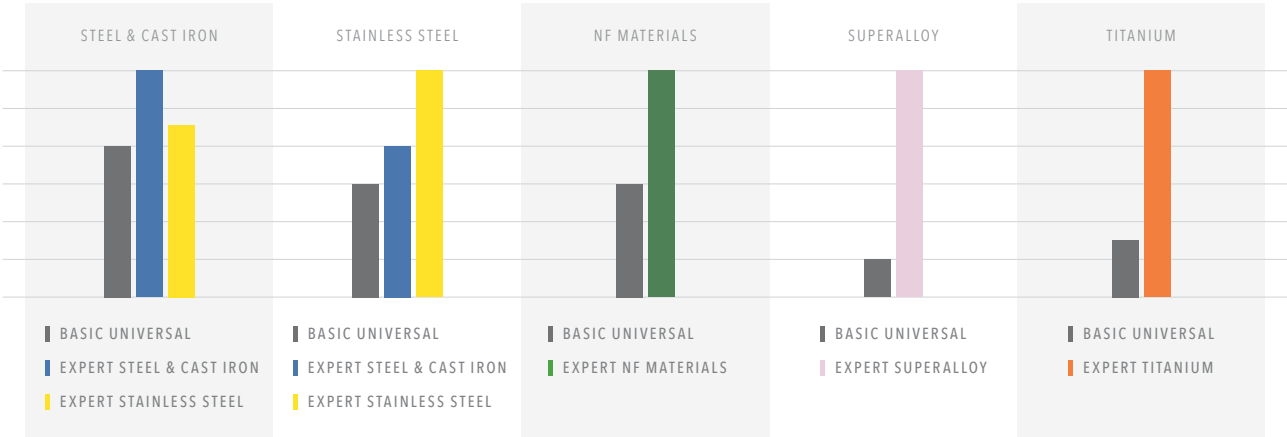


APPLICATION EXAMPLES


THE BCU1 SERIES IN COMPARISON TO OUR EXPERT SERIES

The **BCU1 series** stands out due to its excellent price/performance ratio and the wide range of possible uses for the tools. The milling cutters in this range can be used on different materials with solid results. Our Expert Series, on the other hand, are specially tailored to one particular area of application and deliver optimum machining performance with the corresponding materials. In order to illustrate the differences in terms of equipment and performance between the BCU1 Series and the Expert Series, we carried out various scenarios and presented the results visually.

We have tested both the BCU1 Series and the Expert Series with the materials mentioned. Compared with the Expert Series, which are each specially designed for a specific area of application, the BCU1 Series has successfully proven its versatility in internal tests. The results of the service life comparisons are shown in the following diagrams.



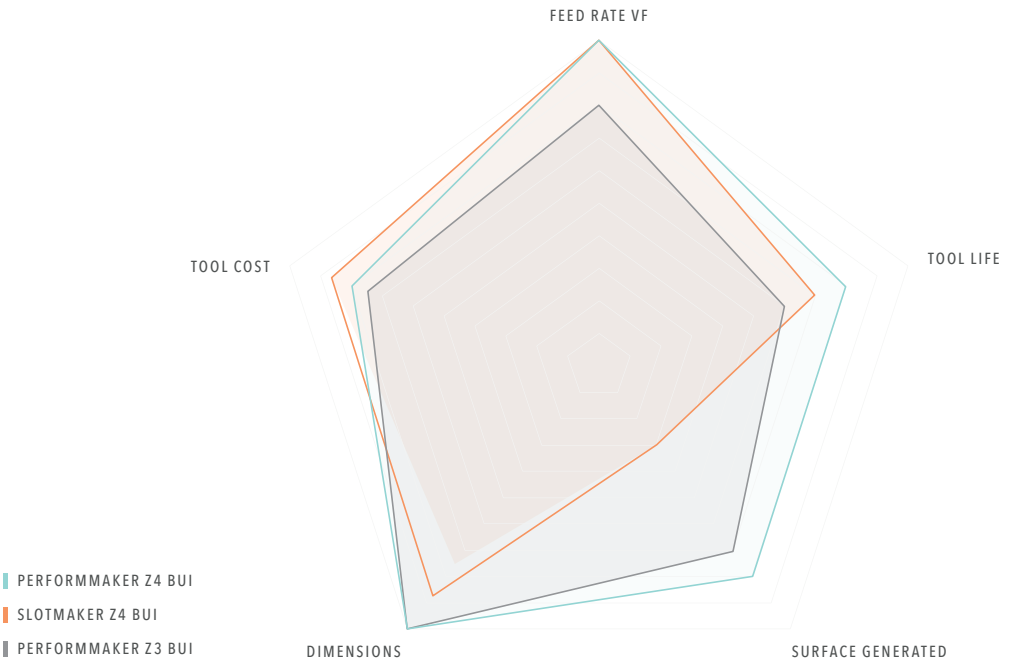The tool matrix for our BCU1 Series compares the performance of individual milling cutters within the series. The values clearly show the performance in relation to the respective property in order to help you choose the right tool for every requirement.



OUR NEW COREMAKER Z2 5XD IC BUI (BCU1-D01-0223)



COMPARISON WITH THE COMPETITION

Comparison of tool life when drilling in V2A (1.4301)


During in-house tests carried out at our own research center, our Coremaker came out on top in the comparison with its competitors.

Technical parameters Drilling	
Vc	90 m/min
fz	0,12 mm/Z
ap	34 mm
Cooling	cooling lubricant - IC
Clamping	ER16

Drill Z2 Ø6,8 5xD IKZ	Quantity drill holes	Wear (mm)	Cutting data according to manufacturer	Metal removal rate in cm³/min
BCU1-D01-0223	1100	0.016	Vc90 / fu0.12	18.38
Competitor Germany	672	0.162	Vc60 / fu0.14	14.27
Competitor Germany	8	0.189	Vc66 / fu0.12	13.47
Competitor Sweden	366	0.4	Vc55 / fu0.13	12.17
Competitor Japan	550	0.172	Vc50 / fu0.14	11.04
Competitor USA	1100	0.293	Vc40 / fu0.1	6.79
Competitor Germany	1100	0.071	Vc55 / fu0.1	9.33

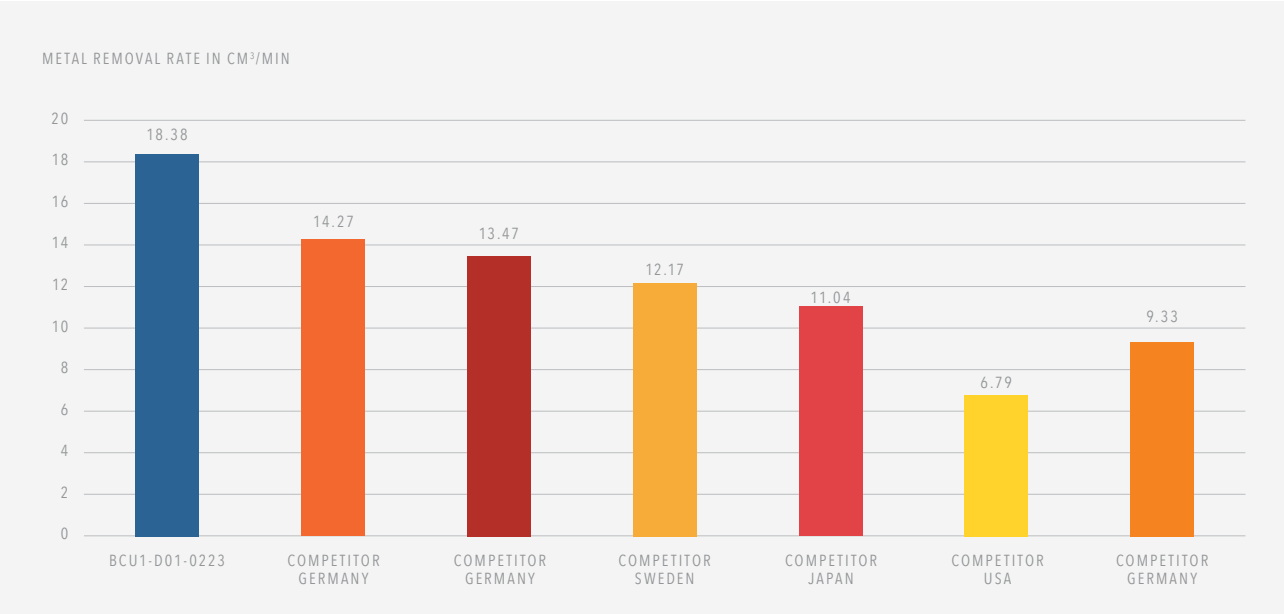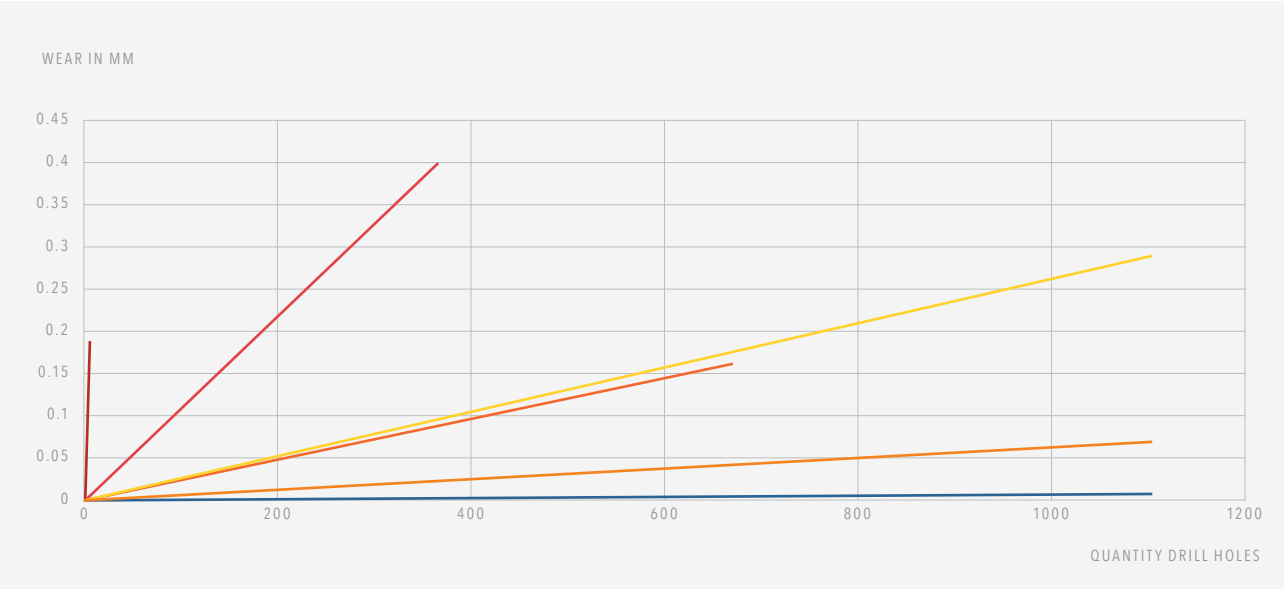

The high-resolution images show our BCU1 Coremaker Z2 5xD IC BUI and the tools of our competitors at maximum running time.

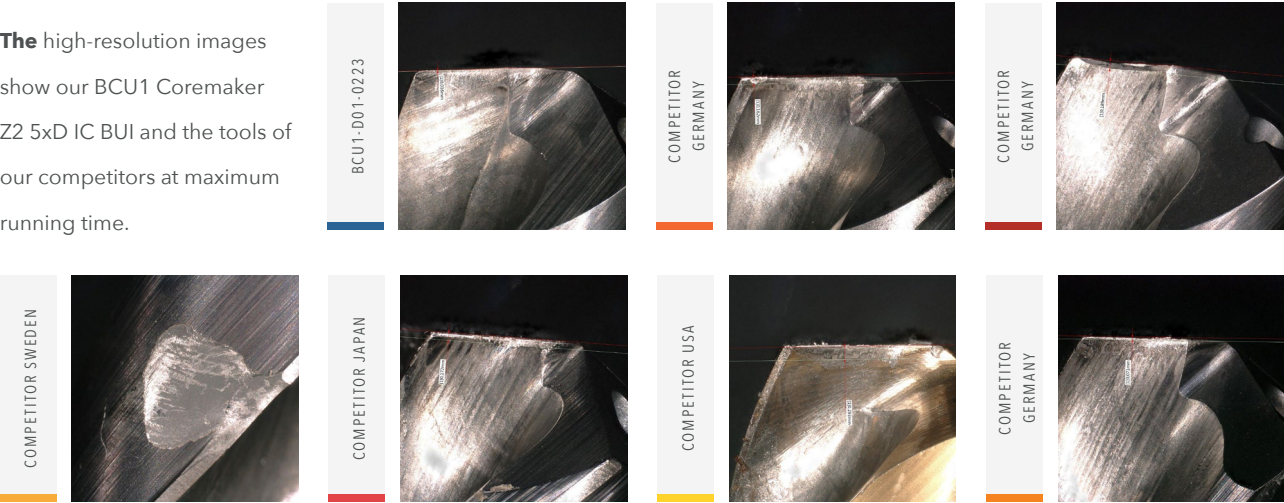

OUR NEW COREMAKER Z2 5XD IC BUI (BCU1-D01-0223)



COMPARISON WITH THE COMPETITION

Comparison of tool life when drilling in 42CrMo4 (1.7225)


During in-house tests carried out at our own research center, our Coremaker came out on top in the comparison with its competitors.

Technical parameters Drilling	
Vc	70 m/min
fz	0.14 mm/Z
ap	34 mm
Cooling	cooling lubricant - IC
Clamping	ER16

Drill Z2 Ø6,8 5xD IKZ	Quantity drill holes	Wear (mm)	Cutting data according to manufacturer	Metal removal rate in cm³/min
BCU1-D01-0223	1100	0.036	Vc90 / fu0.18	27.53
Competitor Germany	1100	0.398	Vc100 / fu0.14	23.79
Competitor Germany	1100	0.250	Vc70 / fu0.12	14.27
Competitor Germany	1100	0.242	Vc90 / fu0.17	26.00
Competitor Germany	1100	0.262	Vc60 / fu0.13	13.26
Competitor USA	550	0.372	Vc100 / fu0.16	27.20

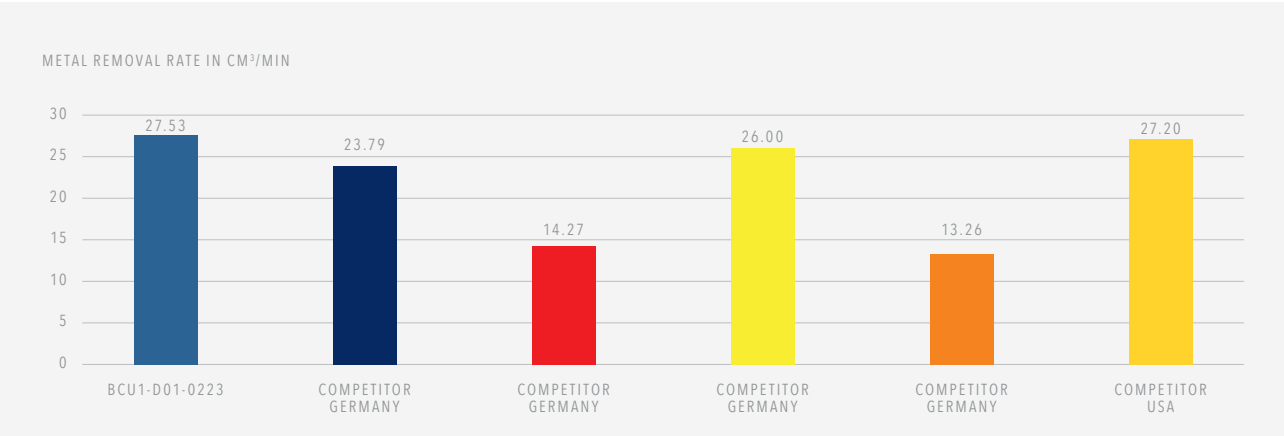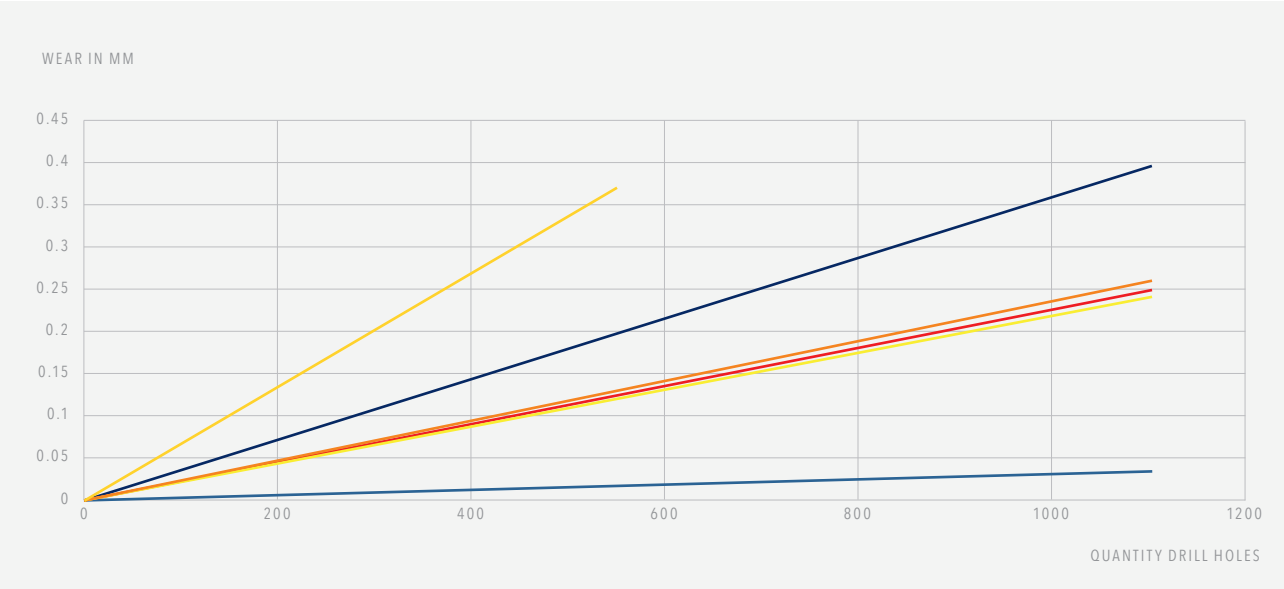

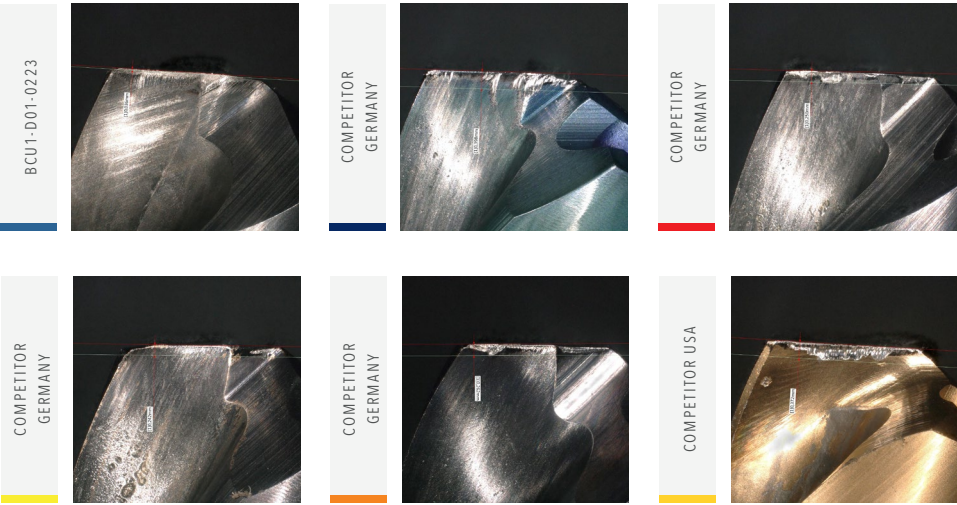In addition to our BCU1 Coremaker Z2 5xD IC BUI, the high-resolution images show our competitors' tools at maximum runtime. Here, our Coremaker clearly stands out in comparison to the tools of our competitors.



OUR NEW COREMAKER Z2 5XD IC BUI (BCU1-D01-0223)



COMPARISON WITH THE COMPETITION

Comparison of tool life when drilling in ST52-3 (1.0570)


During in-house tests carried out at our own research center, our Coremaker came out on top in the comparison with its competitors.

Technical parameters Drilling	
Vc	170 m/min
fz	0.12 mm/Z
ap	34 mm
Cooling	cooling lubricant - IC
Clamping	ER16

Drill Z2 Ø6,8 5xD IKZ	Quantity drill holes	Wear (mm)	Cutting data according to manufacturer	Metal removal rate in cm³/min
BCU1-D01-0223	1100	0.088	Vc170 / fu0.19	54.91
Competitor Germany	1100	0.090	Vc125 / fu0.18	38.24
Competitor Germany	1100	0.092	Vc115 / fu0.22	43.00
Competitor Germany	550	0.240	Vc130 / fu0.245	54.15
Competitor Germany	1100	0.118	Vc90 / fu0.14	21.43
Competitor Germany	1100	0.08	Vc100 / fu0.175	29.74

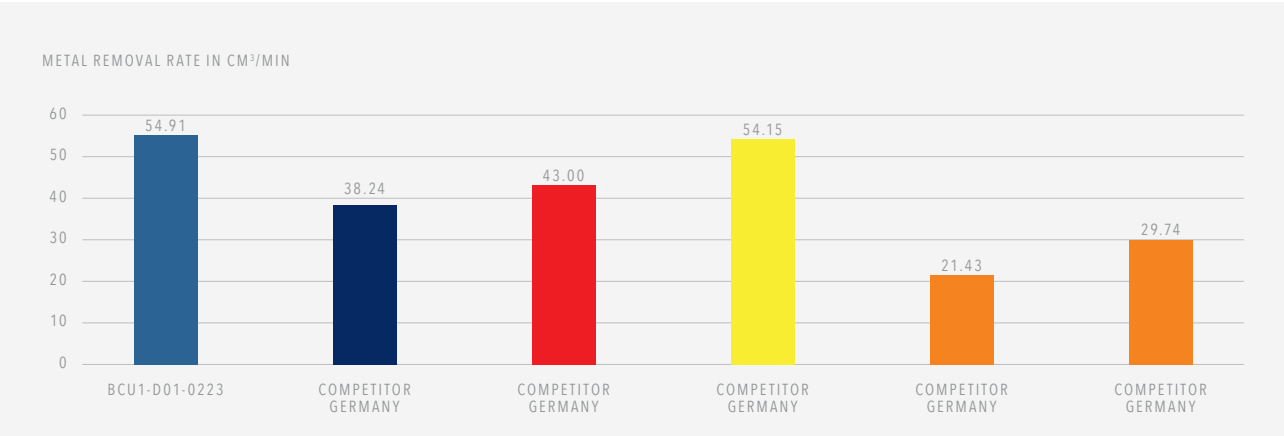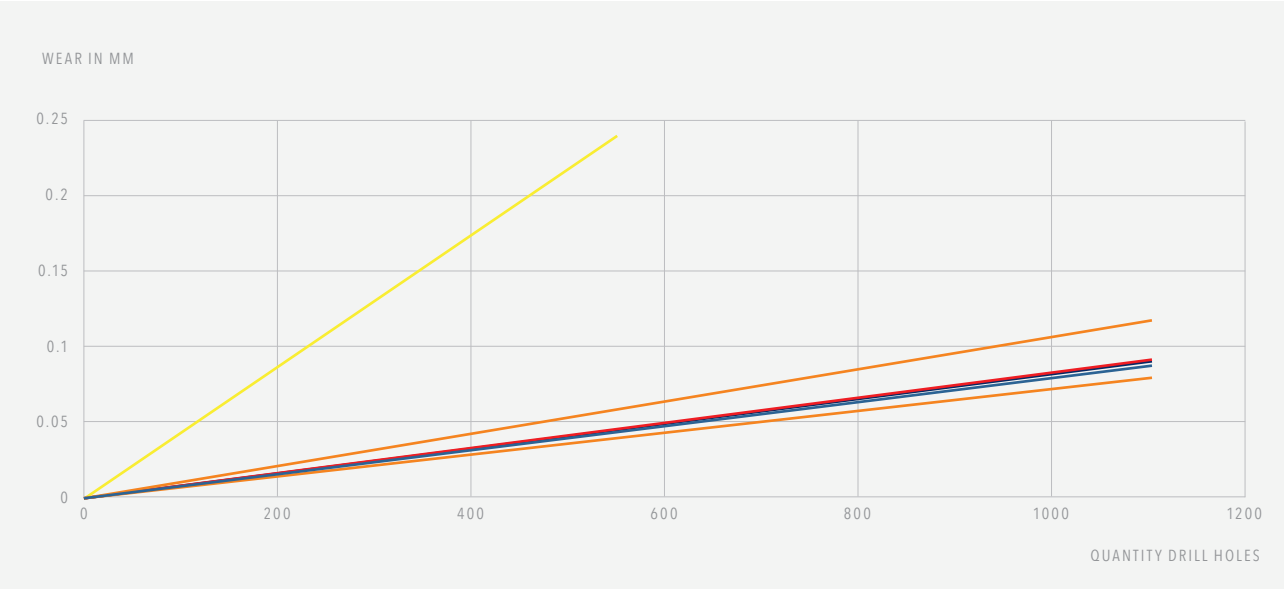

The high-resolution images show our BCU1 Coremaker Z2 5xD IC BUI and our competitors' tools at maximum running time. Here you can clearly see that our Coremaker has not yet reached its wear limit. Some of the competitor tools show immense chipping at the end of their tool life.

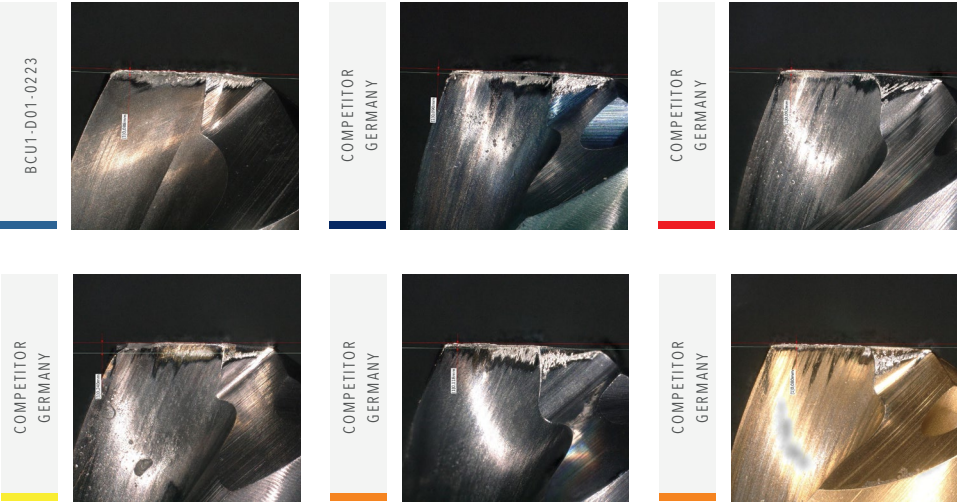

BETA UNI IRON

BUI | Cost-effective and reliable versatile coating for a wide range of applications

BetaUni Iron is an AlCrN-based coating that was developed for demanding universal machining. Thanks to a simple and proven composition, it delivers universally good results for price-sensitive applications.

Due to its nanostructuring, the coating can be used for a wide range of applications and is suitable for use on a wide variety of tool types such as mould tools, shank tools and roughing tools. This reliable universal coating delivers solid results when machining non-ferrous materials, stainless steel, steel and cast iron. It is even possible to machine hard-to-cut materials such as titanium, superalloy and hardened steel in secondary application areas.

PROPERTIES Key features of the BetaUni Iron coating include the following:

- Smooth surfaces due to nanostructuring
- Reduction of built-up edges and cold welds
- High wear resistance thanks to high temperature stability and oxidation resistance

BETAUNI IRON AT A GLANCE	
Structure	Nanostructured
Composition	Aluminium chromium nitride
Layer thickness	2-3 µm
Layer hardness	approx. 3200 HV
Adhesion factor	Friction coefficient: approx. 0.5 (dry on steel)
Max. operating temperature	approx. 1000 °C
Cooling	Dry and wet processing
Main application	Steel and cast iron, stainless steel, non-ferrous materials
Secondary application (limited suitability)	Titanium, superalloy and hardened steel

DIGITAL SERVICES

DISTRIBUTION PARTNERS

We enable companies around the world to manufacture their products. Therefore we work with reliable partners all over the world to ensure that our milling cutters are always available exactly where they are needed and can be delivered straight into your hands.

FIND OUT MORE ABOUT OUR GLOBAL SALES PARTNERS



Browse all BCU1 Series products in our shop

Discover the products in the BCU1 Series online or search for the ideal tool for your application based on various product features. We guarantee, that you will find the perfect milling cutter for your machining needs using our online platform.



WHAT ARE YOU WAITING FOR?



NUMBERING SYSTEM

DISTINGUISHING FEATURES

PRODUCT LINE	TOOL TYPE	TOOL VERSION
BC Basic	D Drilling	M01 End mill cutter PERFORMMAKER
EX Expert	M Milling	M02 Roughing cutter SLOTMAKER
	T Threading	M03 Trochoidal cutter CHIPMAKER
	R Reaming	M04 Finishing cutter MIRRORMAKER
		M05 Single flute cutter BALANCEMAKER
		M06 Torus cutter FORMMAKER
		M07 Face torus cutter BLADEMAKER
		M08 Full radius cutter ROWMAKER
		M09 Deburring cutter CHAMFMAKER
		M10 Forward and backward deburring cutter FB CHAMFMAKER
		M11 Corner rounding cutter ROUNDMAKER
		M12 Forward and backward corner rounding cutter FB ROUNDMAKER
		M13 Engraving cutter TEXTMAKER
		M14 Conical cutter SLOPEMAKER
		M15 Micro end mill cutter PERFORMMAKER MICRO
		M16 Micro torus cutter FORMMAKER MICRO
		M17 Micro full radius cutter ROWMAKER MICRO
		M26 Ball cutter SMOOTHMAKER
		M27 Chamfer cutter BEVELMAKER
		D01 Spiral drill COREMAKER

BCU1 - M01 - 0293

MAIN APPLICATION

PK Steel & Cast Iron

H Hardened Steel

M Stainless Steel

O Graphite, CRP/GRP

T Titanium

S Superalloy

N NF Material

U Universal

VERSION

1 Version 1.0

2 Version 2.0

3 Version 3.0

STILL CAN'T FIND A SUITABLE MILLING CUTTER?

No problem – simply customize an existing tool. Using our configurator for special milling cutters, you can customize existing tools to your needs in an instant or create your own tools based on predefined types.

WE WILL RESPOND TO ALL REQUESTS SUBMITTED VIA THE CONFIGURATOR WITHIN ONE WORKING DAY AT THE LATEST



OTHER DISTINGUISHING FEATURES

BC	U	1	-	M	01	-	0293	-	12/0,5
					PRODUCT IDENT		DIMENSION		
					e.g. 0023		3x10 Cutting diameter x length of undercut		
							12/0,5 Cutting diameter / corner radius		
							10 Diameter		

EXPLANATION OF CUTTING DATA

EXAMPLE FOR SIDE MILLING OF 1.2343 WITH Ø10:

P 3.2 STEEL | high alloyed <1100 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.2083	X42Cr13	X 42 Cr 13	Z 40 C 14		X 41 Cr 13 KU	2314		SUS 420 J2	420
1.2316	X36CrMo17	X 36 CrMo 17	X38CrMo 16 1		X 38 CrMo 16 1 KU		X 38 CrMo 16		D-4
1.2343	X38CrMoV5 1	X 38 CrMoV 5 1	Z 38 CDV 5	BH 11	X 37 CrMoV 5 1 KU		X 37 CrMoV 5	SKD 6	H 11
1.2344	X40CrMoV5 1	X 40 CrMoV 5 1	Z 40 CDV 5	BH 13	X 40 CrMoV 5 1 1 KU 2242		X 40 CrMoV 5	SKD 61	H 13
1.2436	X210CrW12	X 210 CrW 12	Z 210 CW1 2		X 215 CrW 12 1 KU 2312		X 210 CrW 12	SKD 2	

		Strength (N/mm²)	Full Slot	Side Milling	Finishing	ETC	Materialgroup Factor fz / a	Materialgroup Factor ae ETC
P	STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850	200	200	220	315	1	1
2.1-2.2	low alloyed	<950	190	190	210	232	0.9	0.8
3.1-3.2	high alloyed	<1100	170	170	190	198	0.8	0.7
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000	210	210	230	242	0.9	0.8
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850		90	95	152	0.9	0.7
2.1	austenitic	<650		80	85	132	0.8	0.5
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/casted	<600	400	400	420	500	1.6	2
3.1-3.3	COPPER alloyed	<600	200	200	220	262	1.5	1.6
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000		50	53	75	0.8	0.5
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	HRSA	<1450		25	28	42	0.7	0.3

Material P 1.1-1.3		Immersion Angle	Full Slot			Side Milling			Finishing			ETC			
D1	L2		fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
Ø	mm	α°													
3	6	0.5°	0.015	3	3	0.02	0.9	L2max	0.013	0.2	L2max	0.045	0.8	L2max	0.0398
4	8	0.5°	0.015	4	4	0.02	1.2	L2max	0.013	0.2	L2max	0.06	1.1	L2max	0.0536
5	9	0.5°	0.025	5	5	0.03	1.5	L2max	0.02	0.2	L2max	0.07	1.3	L2max	0.0614
6	10	0.8°	0.035	6	6	0.04	1.8	L2max	0.025	0.2	L2max	0.09	1.6	L2max	0.0796
8	12	1°	0.045	8	8	0.055	2.4	L2max	0.03	0.2	L2max	0.11	1.9	L2max	0.0936
10	14	1.5°	0.05	10	10	0.065	3	L2max	0.033	0.2	L2max	0.13	2.3	L2max	0.1094
12	16	2°	0.055	12	12	0.075	3.6	L2max	0.035	0.2	L2max	0.15	2.6	L2max	0.1236
16	22	2.5°	0.065	16	16	0.085	4.8	L2max	0.04	0.2	L2max	0.17	3.3	L2max	0.1376
20	26	3°	0.08	20	20	0.1	6	L2max	0.045	0.2	L2max	0.2	3.6	L2max	0.1537

DETERMINATION OF CUTTING DATA:

From the material key (page 190 - 200) results: **material group P3.2**
Vc= 170 m/min (as indicated in the table)
fz= 0.065 mm/Z (as indicated in the table) x Factor fz 0.8 = **fz 0.052 mm/Z**

THE MATERIAL KEY WITH
DETAILED BREAKDOWN OF
MATERIALS BY MATERIAL
GROUP CAN BE FOUND ON
PAGE 190 - 200.

OVERVIEW OF THE
DIFFERENT MATERIAL
GROUPS FOR THIS TOOL
INCLUDING FACTORS

ALL DATA GIVEN HERE IS
FOR THE FIRST GROUP
P1.1-1.3 IN THE MATERIAL
GROUP OVERVIEW

EXAMPLE FOR ETC OF 1.4303 WITH Ø10:

M 2.1 STAINLESS STEEL | austenitic <650 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.4300	X12CrNi188			302					
1.4301	X5CrNi1810	X 6 CrNi 18 10 KD	Z 6 CN 18.09	304 S 15	X 5 CrNi 18 10	2332	X 5 CrNi 18 11	SUS 304	304 H
1.4302	X5CrNi199	X 6 CrNi 20 10 KE		308 S 96					
1.4303	X5CrNi1812	X 8 CrNi 18 12 KD	Z 8 CN 17.07	305 S 19	X 8 CrNi 19 10		X 8 CrNi 18 12	SUS 305	308
1.4305	X10CrNiS189	X 8 CrNiS 19 9	Z 8 CNF 18.09	303 S 31	X 8 CrNiS 18 9	2346	F.310.C	SUS 303	303

		Strength (N/mm²)	Full Slot	Side Milling	Finishing	ETC	Materialgroup Factor fz / a	Materialgroup Factor ae ETC
P	STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850	200	200	220	315	1	1
2.1-2.2	low alloyed	<950	190	190	210	232	0.9	0.8
3.1-3.2	high alloyed	<1100	170	170	190	198	0.8	0.7
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000	210	210	230	242	0.9	0.8
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850		90	95	152	0.9	0.7
2.1	austenitic	<650		80	85	132	0.8	0.5
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/casted	<600	400	400	420	500	1.6	2
3.1-3.3	COPPER alloyed	<600	200	200	220	262	1.5	1.6
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000		50	53	75	0.8	0.5
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	HRSA	<1450		25	28	42	0.7	0.3

Material P 1.1-1.3		Immersion Angle	Full Slot			Side Milling			Finishing			ETC			
D1	L2		fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
Ø	mm	α°													
3	6	0.5°	0.015	3	3	0.02	0.9	L2max	0.013	0.2	L2max	0.045	0.8	L2max	0.0398
4	8	0.5°	0.015	4	4	0.02	1.2	L2max	0.013	0.2	L2max	0.06	1.1	L2max	0.0536
5	9	0.5°	0.025	5	5	0.03	1.5	L2max	0.02	0.2	L2max	0.07	1.3	L2max	0.0614
6	10	0.8°	0.035	6	6	0.04	1.8	L2max	0.025	0.2	L2max	0.09	1.6	L2max	0.0796
8	12	1°	0.045	8	8	0.055	2.4	L2max	0.03	0.2	L2max	0.11	1.9	L2max	0.0936
10	14	1.5°	0.05	10	10	0.065	3	L2max	0.033	0.2	L2max	0.13	2.3	L2max	0.1094
12	16	2°	0.055	12	12	0.075	3.6	L2max	0.035	0.2	L2max	0.15	2.6	L2max	0.1236
16	22	2.5°	0.065	16	16	0.085	4.8	L2max	0.04	0.2	L2max	0.17	3.3	L2max	0.1376
20	26	3°	0.08	20	20	0.1	6	L2max	0.045	0.2	L2max	0.2	3.6	L2max	0.1537

DETERMINATION OF CUTTING DATA:

From the material key (page 190 - 200) results: **material group M2.1**
Vc= 132 m/min (as indicated in the table)
fz= 0.13 mm/Z (as indicated in the table) x Factor fz 0.8 = **fz 0.104 mm/Z**
ae= 2.3 mm (as indicated in the table) x Factor ae 0.5 = **1.15 mm ae**



VIDEO EXPLANATION

THE MATERIAL KEY WITH
DETAILED BREAKDOWN OF
MATERIALS BY MATERIAL
GROUP CAN BE FOUND ON
PAGE 190 - 200.

OVERVIEW OF THE
DIFFERENT MATERIAL
GROUPS FOR THIS TOOL
INCLUDING FACTORS


ALL DATA GIVEN HERE IS
FOR THE FIRST GROUP
P1.1-1.3 IN THE MATERIAL
GROUP OVERVIEW



Cooling	
Tolerance	e8
Coating	BetaUni Iron

Strategy	ETC	HPC	UNI	Basic
Application				
Features	HA	≠		

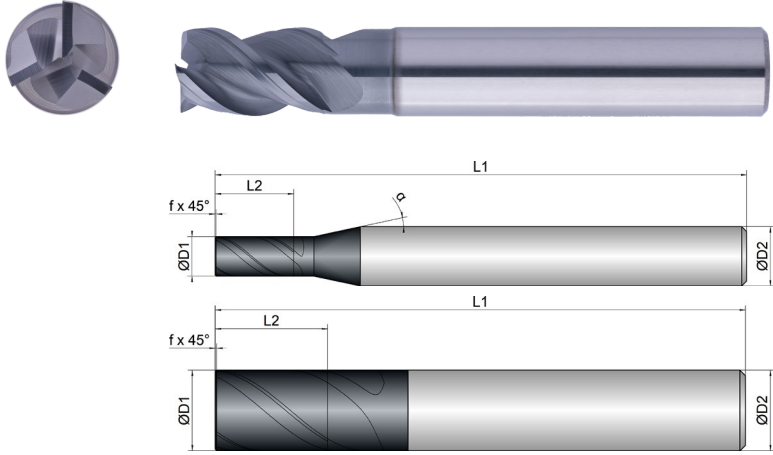- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- Large chip chambers for good chip evacuation



Roughing					Finishing			
inappropriate					optimal			
BCU1-M01-0103	D1 mm Ø	L2 mm	L1 mm	D2 mm Ø	z #	45° mm	°	α °
3	3.0	6.0	54.0	6.0	3	0.10	45	12
4	4.0	8.0	54.0	6.0	3	0.10	45	12
5	5.0	9.0	54.0	6.0	3	0.20	45	12
6	6.0	10.0	54.0	6.0	3	0.20	45	0
8	8.0	12.0	58.0	8.0	3	0.20	45	0
10	10.0	14.0	66.0	10.0	3	0.20	45	0
12	12.0	16.0	73.0	12.0	3	0.20	45	0
16	16.0	22.0	82.0	16.0	3	0.30	45	0
20	20.0	26.0	92.0	20.0	3	0.30	45	0



Download Catalog Pages (PDF)

		Full Slot		Side Milling		Finishing		ETC		Materialgroup Factor fz / a	Materialgroup Factor ae ETC
Material		Strength (N/mm²)									
P	STEEL	Vc = m/min		Vc = m/min		Vc = m/min		Vc = m/min			
1.1-1.3	unalloyed	<850	200	200	220	315	1	1			
2.1-2.2	low alloyed	<950	190	190	210	232	0.9	0.8			
3.1-3.2	high alloyed	<1100	170	170	190	198	0.8	0.7			
K	CASTINGS	Vc = m/min		Vc = m/min		Vc = m/min		Vc = m/min			
1.1-1.2	grey cast iron	<1000	210	210	230	242	0.9	0.8			
M	STAINLESS STEEL	Vc = m/min		Vc = m/min		Vc = m/min		Vc = m/min			
1.1	ferritic/martensitic	<850		90	95	152	0.9	0.7			
2.1	austenitic	<650		80	85	132	0.8	0.5			
N	NON-FERROUS	Vc = m/min		Vc = m/min		Vc = m/min		Vc = m/min			
1.1-2.3	ALUMINIUM alloyed/cast	<600	400	400	420	500	1.6	2			
3.1-3.3	COPPER alloyed	<600	200	200	220	262	1.5	1.6			
T	TITANIUM	Vc = m/min		Vc = m/min		Vc = m/min		Vc = m/min			
2.1-2.2	pure/alloyed	<1000		50	53	75	0.8	0.5			
S	SUPER ALLOYS	Vc = m/min		Vc = m/min		Vc = m/min		Vc = m/min			
1.1-1.3	HRSA	<1450		25	28	42	0.7	0.3			


ADVICE | The values marked in turquoise are side applications!
All fz/a values in the table for material group 1.1, consider factors for the other groups!
When helical and ramping use fz 50 % of the full slot.
The specified values represent starting values for a solid clamping situation.
To determine the hmax values, please use the provided formula.
For material groups T and S, the use of cooling lubricant is recommended!
For coarser roughing operations and ETC operations, we recommend a Weldon in conjunction with a Weldon chuck.

Material P 1.1-1.3																
D1 	L2 	Immersion Angle 	Full Slot 			Side Milling 			Finishing 			ETC 				
			Ø	mm	α°	fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)
3	6	0.5°	0.02	3	3	0.025	0.9	L2max	0.018	0.2	L2max	0.045	0.8	L2max	0.0398	
4	8	0.5°	0.02	4	4	0.025	1.2	L2max	0.021	0.2	L2max	0.06	1.1	L2max	0.0536	
5	9	0.5°	0.03	5	5	0.035	1.5	L2max	0.02	0.2	L2max	0.07	1.3	L2max	0.0614	
6	10	0.8°	0.04	6	6	0.045	1.8	L2max	0.025	0.2	L2max	0.09	1.6	L2max	0.0796	
8	12	1°	0.05	8	8	0.06	2.4	L2max	0.03	0.2	L2max	0.11	1.9	L2max	0.0936	
10	14	1.5°	0.055	10	10	0.07	3	L2max	0.035	0.2	L2max	0.13	2.3	L2max	0.1094	
12	16	2°	0.06	12	12	0.08	3.6	L2max	0.04	0.2	L2max	0.15	2.6	L2max	0.1236	
16	22	2.5°	0.07	16	16	0.09	4.8	L2max	0.045	0.2	L2max	0.17	3.3	L2max	0.1376	
20	26	3°	0.09	20	20	0.11	6	L2max	0.05	0.2	L2max	0.2	3.6	L2max	0.1537	

Cooling	
Tolerance	e8
Coating	BetaUni Iron

Strategy	ETC	HPC	UNI	Basic
Application				
Features	HB	≠		1,5xD 45°

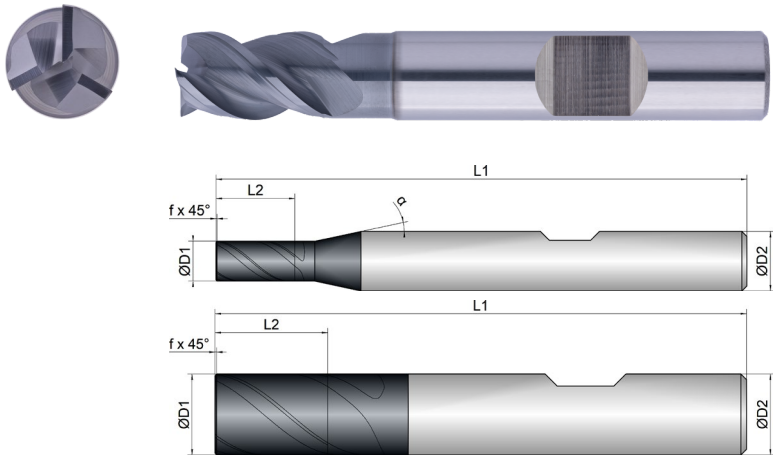- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- Large chip chambers for good chip evacuation



Roughing					Finishing			
inappropriateoptimal					inappropriateoptimal			
BCU1-M01-0104	D1 mm Ø	L2 mm	L1 mm	D2 mm Ø	z #	45° mm	°	°
3	3.0	6.0	54.0	6.0	3	0.10	45	12
4	4.0	8.0	54.0	6.0	3	0.10	45	12
5	5.0	9.0	54.0	6.0	3	0.20	45	12
6	6.0	10.0	54.0	6.0	3	0.20	45	0
8	8.0	12.0	58.0	8.0	3	0.20	45	0
10	10.0	14.0	66.0	10.0	3	0.20	45	0
12	12.0	16.0	73.0	12.0	3	0.20	45	0
16	16.0	22.0	82.0	16.0	3	0.30	45	0
20	20.0	26.0	92.0	20.0	3	0.30	45	0

Download Catalog Pages (PDF)


			Full Slot	Side Milling	Finishing	ETC	Materialgroup Factor fz / a	Materialgroup Factor ae ETC
P	Material	Strength (N/mm²)	Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850	200	200	220	315	1	1
2.1-2.2	low alloyed	<950	190	190	210	232	0.9	0.8
3.1-3.2	high alloyed	<1100	170	170	190	198	0.8	0.7
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000	210	210	230	242	0.9	0.8
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850		90	95	152	0.9	0.7
2.1	austenitic	<650		80	85	132	0.8	0.5
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/cast	<600	400	400	420	500	1.6	2
3.1-3.3	COPPER alloyed	<600	200	200	220	262	1.5	1.6
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000		50	53	75	0.8	0.5
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	HRSA	<1450		25	28	42	0.7	0.3
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1, consider factors for the other groups! When helical and ramping use fz 50 % of the full slot. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material groups T and S, the use of cooling lubricant is recommended!								

D1 Ø	L2 mm	Immersion Angle α°	Full Slot			Side Milling			Finishing			ETC			
			fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
3	6	0.5°	0.02	3	3	0.025	0.9	L2max	0.018	0.2	L2max	0.045	0.8	L2max	0.0398
4	8	0.5°	0.02	4	4	0.025	1.2	L2max	0.021	0.2	L2max	0.06	1.1	L2max	0.0536
5	9	0.5°	0.03	5	5	0.035	1.5	L2max	0.02	0.2	L2max	0.07	1.3	L2max	0.0614
6	10	0.8°	0.04	6	6	0.045	1.8	L2max	0.025	0.2	L2max	0.09	1.6	L2max	0.0796
8	12	1°	0.05	8	8	0.06	2.4	L2max	0.03	0.2	L2max	0.11	1.9	L2max	0.0936
10	14	1.5°	0.055	10	10	0.07	3	L2max	0.035	0.2	L2max	0.13	2.3	L2max	0.1094
12	16	2°	0.06	12	12	0.08	3.6	L2max	0.04	0.2	L2max	0.15	2.6	L2max	0.1236
16	22	2.5°	0.07	16	16	0.09	4.8	L2max	0.045	0.2	L2max	0.17	3.3	L2max	0.1376
20	26	3°	0.09	20	20	0.11	6	L2max	0.05	0.2	L2max	0.2	3.6	L2max	0.1537

Cooling	   
Tolerance	e8
Coating	BetaUni Iron

Strategy	ETC	HPC	UNI			
Application						
Features	HA	≠	2xD		45°	

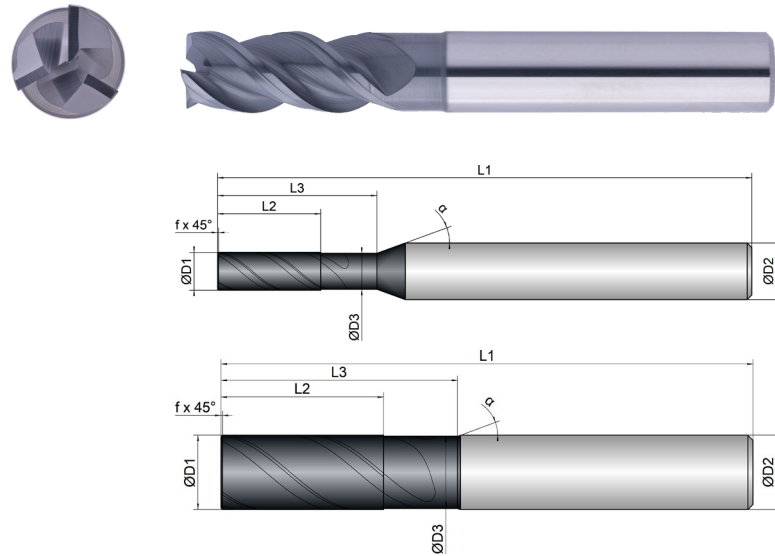- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- Large chip chambers for good chip evacuation








Roughing

inappropriate optimal

Finishing

inappropriate optimal

BCU1-M01-0113	D1	D3	L2	L3	L1	D2	z			α
	 mm $\varnothing$	 mm $\varnothing$	 mm	 mm	 mm	 mm $\varnothing$	 #	 mm	 °	 °
2	2.0	1.8	5.0	10.0	57.0	6.0	3	0.10	45	20
3	3.0	2.8	8.0	13.0	57.0	6.0	3	0.10	45	20
4	4.0	3.8	11.0	17.0	57.0	6.0	3	0.10	45	20
5	5.0	4.8	13.0	20.0	57.0	6.0	3	0.20	45	20
6	6.0	5.8	13.0	20.0	57.0	6.0	3	0.20	45	20
8	8.0	7.7	19.0	25.0	63.0	8.0	3	0.20	45	20
10	10.0	9.7	22.0	32.0	72.0	10.0	3	0.20	45	20
12	12.0	11.6	26.0	38.0	83.0	12.0	3	0.20	45	20
16	16.0	15.5	32.0	44.0	92.0	16.0	3	0.30	45	20
20	20.0	19.5	41.0	54.0	104.0	20.0	3	0.30	45	20







Download Catalog
Pages (PDF)

 Download Catalog Pages (PDF)			Full Slot 		Side Milling 		Finishing 		ETC 		Materialgroup Factor fz / a		Materialgroup Factor ae ETC	
Material		Strength (N/mm²)												
P	STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min								
1.1-1.3	unalloyed	<850	200	200	220	315	1	1						
2.1-2.2	low alloyed	<950	190	190	210	232	0.9	0.8						
3.1-3.2	high alloyed	<1100	170	170	190	198	0.8	0.7						
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min								
1.1-1.2	grey cast iron	<1000	210	210	230	242	0.9	0.8						
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min								
1.1	ferritic/martensitic	<850		90	95	152	0.9	0.7						
2.1	austenitic	<650		80	85	132	0.8	0.5						
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min								
1.1-2.3	ALUMINIUM alloyed/cast	<600	400	400	420	500	1.6	2						
3.1-3.3	COPPER alloyed	<600	200	200	220	262	1.5	1.6						
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min								
2.1-2.2	pure/alloyed	<1000		50	53	75	0.8	0.5						

ADVICE | The values marked in turquoise are side applications!
 All fz/a values in the table for material group 1.1, consider factors for the other groups!
 When helical and ramping use fz 50 % of the full slot.
 The specified values represent starting values for a solid clamping situation.
 To determine the hmax values, please use the provided formula.
 For material groups T and S, the use of cooling lubricant is recommended!
 For coarser roughing operations and ETC operations, we recommend a Weldon in conjunction with a Weldon chuck.


Material P 1.1-1.3

															
Ø	mm	α°	fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
2	5	0.5°	0.015	2	2	0.02	0.6	L2max	0.011	0.2	L2max	0.03	0.6	L2max	0.0275
3	8	0.5°	0.02	3	3	0.025	0.9	L2max	0.015	0.2	L2max	0.045	0.8	L2max	0.0398
4	11	0.5°	0.02	4	4	0.025	1.2	L2max	0.018	0.2	L2max	0.06	1.1	L2max	0.0536
5	13	0.5°	0.03	5	5	0.035	1.5	L2max	0.02	0.2	L2max	0.07	1.3	L2max	0.0614
6	13	0.8°	0.04	6	6	0.045	1.8	L2max	0.022	0.2	L2max	0.09	1.6	L2max	0.0796
8	19	1°	0.05	8	8	0.06	2.4	L2max	0.028	0.2	L2max	0.11	1.9	L2max	0.0936
10	22	1.5°	0.055	10	10	0.07	3	L2max	0.033	0.2	L2max	0.13	2.3	L2max	0.1094
12	26	2°	0.06	12	12	0.08	3.6	L2max	0.035	0.2	L2max	0.15	2.6	L2max	0.1236
16	32	2.5°	0.07	16	16	0.09	4.8	L2max	0.038	0.2	L2max	0.17	3.3	L2max	0.1376
20	41	3°	0.09	20	20	0.11	6	L2max	0.04	0.2	L2max	0.2	3.6	L2max	0.1537

Cooling	
Tolerance	e8
Coating	BetaUni Iron

Strategy	ETC	HPC	UNI	
Application				
Features	HB	≠	2xD	45°

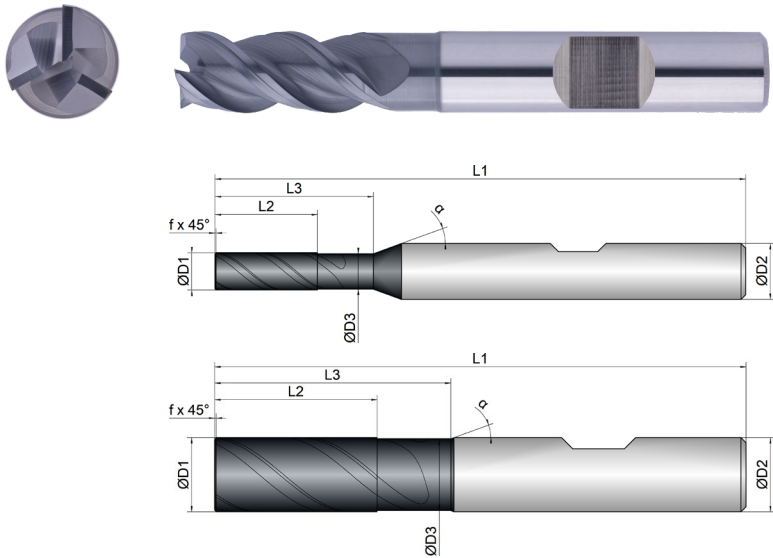- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- Large chip chambers for good chip evacuation



Roughing						Finishing				
inappropriate						optimal				
BCU1-M01-0114	D1	D3	L2	L3	L1	D2	z	45°	α	
2	2.0	1.8	5.0	10.0	57.0	6.0	3	0.10	45	20
3	3.0	2.8	8.0	13.0	57.0	6.0	3	0.10	45	20
4	4.0	3.8	11.0	17.0	57.0	6.0	3	0.10	45	20
5	5.0	4.8	13.0	20.0	57.0	6.0	3	0.20	45	20
6	6.0	5.8	13.0	20.0	57.0	6.0	3	0.20	45	20
8	8.0	7.7	19.0	25.0	63.0	8.0	3	0.20	45	20
10	10.0	9.7	22.0	32.0	72.0	10.0	3	0.20	45	20
12	12.0	11.6	26.0	38.0	83.0	12.0	3	0.20	45	20
16	16.0	15.5	32.0	44.0	92.0	16.0	3	0.30	45	20
20	20.0	19.5	41.0	54.0	104.0	20.0	3	0.30	45	20


Download Catalog Pages (PDF)			Full Slot	Side Milling	Finishing	ETC	Materialgroup Factor fz / α	Materialgroup Factor ae ETC
P	Material	Strength (N/mm²)	Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850	200	200	220	315	1	1
2.1-2.2	low alloyed	<950	190	190	210	232	0.9	0.8
3.1-3.2	high alloyed	<1100	170	170	190	198	0.8	0.7
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000	210	210	230	242	0.9	0.8
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850		90	95	152	0.9	0.7
2.1	austenitic	<650		80	85	132	0.8	0.5
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/cast	<600	400	400	420	500	1.6	2
3.1-3.3	COPPER alloyed	<600	200	200	220	262	1.5	1.6
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000		50	53	75	0.8	0.5
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	HRSA	<1450		25	28	42	0.7	0.3
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1, consider factors for the other groups! When helical and ramping use fz 50 % of the full slot. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material groups T and S, the use of cooling lubricant is recommended!								

D1		Immersion Angle	Full Slot			Side Milling			Finishing			ETC			
Ø	mm		fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
2	5	0.5°	0.015	2	2	0.02	0.6	L2max	0.011	0.2	L2max	0.03	0.6	L2max	0.0275
3	8	0.5°	0.02	3	3	0.025	0.9	L2max	0.015	0.2	L2max	0.045	0.8	L2max	0.0398
4	11	0.5°	0.02	4	4	0.025	1.2	L2max	0.018	0.2	L2max	0.06	1.1	L2max	0.0536
5	13	0.5°	0.03	5	5	0.035	1.5	L2max	0.02	0.2	L2max	0.07	1.3	L2max	0.0614
6	13	0.8°	0.04	6	6	0.045	1.8	L2max	0.022	0.2	L2max	0.09	1.6	L2max	0.0796
8	19	1°	0.05	8	8	0.06	2.4	L2max	0.028	0.2	L2max	0.11	1.9	L2max	0.0936
10	22	1.5°	0.055	10	10	0.07	3	L2max	0.033	0.2	L2max	0.13	2.3	L2max	0.1094
12	26	2°	0.06	12	12	0.08	3.6	L2max	0.035	0.2	L2max	0.15	2.6	L2max	0.1236
16	32	2.5°	0.07	16	16	0.09	4.8	L2max	0.038	0.2	L2max	0.17	3.3	L2max	0.1376
20	41	3°	0.09	20	20	0.11	6	L2max	0.04	0.2	L2max	0.2	3.6	L2max	0.1537

Cooling	   
Tolerance	e8
Coating	BetaUni Iron

Strategy	ETC	HPC	UNI			 Basic
Application						
Features	HA	≠	3xD		45°	

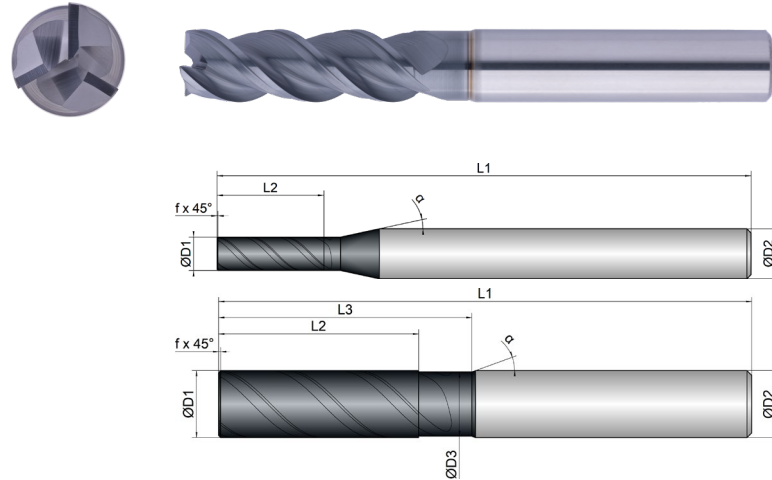- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- Large chip chambers for good chip evacuation





Roughing

inappropriate optimal

Finishing

inappropriate optimal

BCU1-M01- 0123	D1	D3	L2	L3	L1	D2	z			α
	 mm $\varnothing$	 mm $\varnothing$	 mm	 mm	 mm	 mm $\varnothing$	 #	 mm	 °	 °
4	4.0	0.0	13.0	0.0	65.0	6.0	3	0.10	45	12
5	5.0	0.0	16.0	0.0	65.0	6.0	3	0.20	45	12
6	6.0	5.6	18.0	24.0	65.0	6.0	3	0.20	45	20
8	8.0	7.6	24.0	30.0	70.0	8.0	3	0.20	45	20
10	10.0	9.6	30.0	38.0	80.0	10.0	3	0.20	45	20
12	12.0	11.4	36.0	46.0	93.0	12.0	3	0.20	45	20
16	16.0	15.4	48.0	58.0	110.0	16.0	3	0.30	45	20
20	20.0	19.4	60.0	74.0	126.0	20.0	3	0.30	45	20



Download Catalog
Pages (PDF)

 Download Catalog Pages (PDF)														
Material			Strength (N/mm²)											
P	STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min								
1.1-1.3	unalloyed	<850	190	190	210	305	1					1		
2.1-2.2	low alloyed	<950	180	180	200	222	0.9					0.8		
3.1-3.2	high alloyed	<1100	160	160	180	188	0.8					0.7		
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min								
1.1-1.2	grey cast iron	<1000	200	200	220	232	0.9					0.8		
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min								
1.1	ferritic/martensitic	<850		85	90	142	0.9					0.7		
2.1	austenitic	<650		75	80	122	0.8					0.5		
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min								
1.1-2.3	ALUMINIUM alloyed/cast	<600	380	380	400	500	1.6					2		
3.1-3.3	COPPER alloyed	<600	180	180	200	242	1.5					1.6		
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min								
2.1-2.2	pure/alloyed	<1000		45	50	75	0.8					0.5		
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min								
1.1-1.3	HRSA	<1450		20	25	42	0.7					0.3		
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1, consider factors for the other groups! When helical and ramping use fz 50 % of the full slot. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material groups T and S, the use of cooling lubricant is recommended! For coarser roughing operations and ETC operations, we recommend a Weldon in conjunction with a Weldon chuck.														


Material P 1.1-1.3

		Immersion Angle 	Full Slot 			Side Milling 			Finishing 			ETC 			
Ø	mm	α°	fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
4	13	0.5°	0.015	4	4	0.02	1.2	L2max	0.018	0.2	L2max	0.05	0.88	L2max	0.0414
5	16	0.5°	0.025	5	5	0.03	1.5	L2max	0.02	0.2	L2max	0.06	1.04	L2max	0.0487
6	18	0.8°	0.035	6	6	0.04	1.8	L2max	0.025	0.2	L2max	0.08	1.28	L2max	0.0655
8	24	1°	0.045	8	8	0.055	2.4	L2max	0.03	0.2	L2max	0.1	1.52	L2max	0.0785
10	30	1.5°	0.05	10	10	0.065	3	L2max	0.035	0.2	L2max	0.12	1.84	L2max	0.093
12	36	2°	0.055	12	12	0.075	3.6	L2max	0.04	0.2	L2max	0.14	2.08	L2max	0.106
16	48	2.5°	0.065	16	16	0.085	4.8	L2max	0.045	0.2	L2max	0.15	2.64	L2max	0.1114
20	60	3°	0.085	20	20	0.1	6	L2max	0.05	0.2	L2max	0.18	2.88	L2max	0.1264




Cooling	   
Tolerance	e8
Coating	BetaUni Iron

Strategy	ETC	HPC	UNI			 Basic
Application						
Features	HB	≠	3xD		45°	

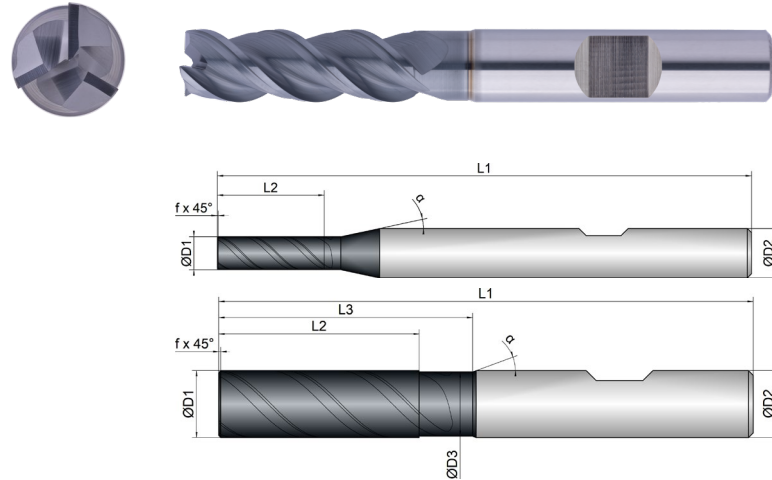- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- Large chip chambers for good chip evacuation



The figure consists of two horizontal bar charts side-by-side. The left chart is titled 'Roughing' and the right chart is titled 'Finishing'. Both charts have a horizontal axis with 'inappropriate' on the left and 'optimal' on the right. The 'Roughing' chart shows a dark blue bar extending from the 'inappropriate' end towards the 'optimal' end. The 'Finishing' chart shows a light blue bar extending from the 'inappropriate' end towards the 'optimal' end.

BCU1-M01-0124	 mm ø	 mm ø	 mm	 mm	 mm	 mm ø	 #	 mm	 °	 °
4	4.0	0.0	13.0	0.0	65.0	6.0	3	0.10	45	12
5	5.0	0.0	16.0	0.0	65.0	6.0	3	0.20	45	12
6	6.0	5.6	18.0	24.0	65.0	6.0	3	0.20	45	20
8	8.0	7.6	24.0	30.0	70.0	8.0	3	0.20	45	20
10	10.0	9.6	30.0	38.0	80.0	10.0	3	0.20	45	20
12	12.0	11.4	36.0	46.0	93.0	12.0	3	0.20	45	20
16	16.0	15.4	48.0	58.0	110.0	16.0	3	0.30	45	20
20	20.0	19.4	60.0	74.0	126.0	20.0	3	0.30	45	20



Download Catalog
Pages (PDF)

 Download Catalog Pages (PDF)								
Material	Strength (N/mm²)							
P	STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850	190	190	210	305	1	1
2.1-2.2	low alloyed	<950	180	180	200	222	0.9	0.8
3.1-3.2	high alloyed	<1100	160	160	180	188	0.8	0.7
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000	200	200	220	232	0.9	0.8
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850		85	90	142	0.9	0.7
2.1	austenitic	<650		75	80	122	0.8	0.5
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/cast	<600	380	380	400	500	1.6	2
3.1-3.3	COPPER alloyed	<600	180	180	200	242	1.5	1.6
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000		45	50	75	0.8	0.5
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	HRSA	<1450		20	25	42	0.7	0.3
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1, consider factors for the other groups! When helical and ramping use fz 50 % of the full slot. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material groups T and S, the use of cooling lubricant is recommended!								


Material P 1.1-1.3

		Immersion Angle 	Full Slot 			Side Milling 			Finishing 			ETC 			
Ø	mm	α°	fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
4	13	0.5°	0.015	4	4	0.02	1.2	L2max	0.018	0.2	L2max	0.05	0.88	L2max	0.0414
5	16	0.5°	0.025	5	5	0.03	1.5	L2max	0.02	0.2	L2max	0.06	1.04	L2max	0.0487
6	18	0.8°	0.035	6	6	0.04	1.8	L2max	0.025	0.2	L2max	0.08	1.28	L2max	0.0655
8	24	1°	0.045	8	8	0.055	2.4	L2max	0.03	0.2	L2max	0.1	1.52	L2max	0.0785
10	30	1.5°	0.05	10	10	0.065	3	L2max	0.035	0.2	L2max	0.12	1.84	L2max	0.093
12	36	2°	0.055	12	12	0.075	3.6	L2max	0.04	0.2	L2max	0.14	2.08	L2max	0.106
16	48	2.5°	0.065	16	16	0.085	4.8	L2max	0.045	0.2	L2max	0.15	2.64	L2max	0.1114
20	60	3°	0.085	20	20	0.1	6	L2max	0.05	0.2	L2max	0.18	2.88	L2max	0.1264

Cooling	   
Tolerance	e8
Coating	BetaUni Iron

Strategy	ETC	HPC	UNI					
Application								
Features	HA	≠		1,5xD	45°			

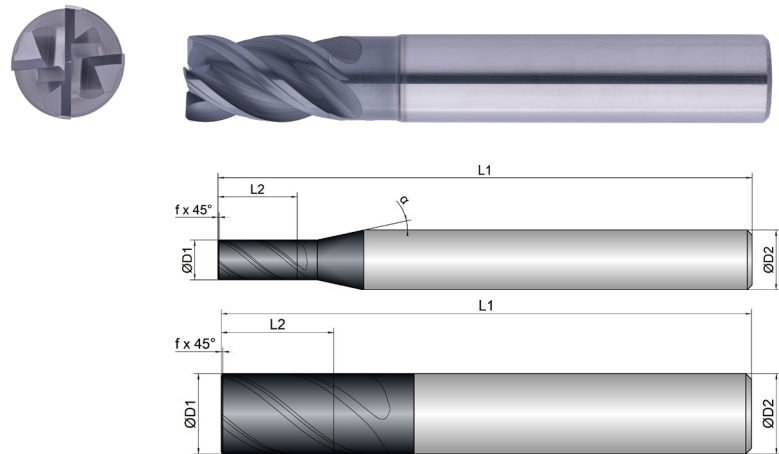- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- Large chip chambers for good chip evacuation




Roughing

inappropriate optimal

Finishing

inappropriate optimal

BCU1-M01-0203								
3	3.0	6.0	54.0	6.0	4	0.10	40	12
4	4.0	8.0	54.0	6.0	4	0.10	40	12
5	5.0	9.0	54.0	6.0	4	0.20	40	12
6	6.0	10.0	54.0	6.0	4	0.20	40	0
8	8.0	12.0	58.0	8.0	4	0.20	40	0
10	10.0	14.0	66.0	10.0	4	0.20	40	0
12	12.0	16.0	73.0	12.0	4	0.20	40	0
16	16.0	22.0	82.0	16.0	4	0.30	40	0
20	20.0	26.0	92.0	20.0	4	0.30	40	0



Download Catalog
Pages (PDF)

 Download Catalog Pages (PDF)			Full Slot 	Side Milling 	Finishing 	ETC 	Materialgroup Factor fz / a	Materialgroup Factor ae ETC
P	STEEL	Strength (N/mm²)	Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850	200	200	220	315	1	1
2.1-2.2	low alloyed	<950	190	190	210	232	0.9	0.8
3.1-3.2	high alloyed	<1100	170	170	190	198	0.8	0.7
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000	210	210	230	242	0.9	0.8
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850		90	95	152	0.9	0.7
2.1	austenitic	<650		80	85	132	0.8	0.5
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/cast	<600	400	400	420	500	1.6	2
3.1-3.3	COPPER alloyed	<600	200	200	220	262	1.5	1.6
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000		50	53	75	0.8	0.5

ADVICE | The values marked in turquoise are side applications!

All f_z/α values in the table for material group 1.1, consider factors for the other groups!

When helical and ramping use fz 50 % of the full slot.

The specified values represent starting values for a solid clamping situation.

To determine the hmax values, please use the provided formula.

For material groups T and S, the use of cooling lubricant is recommended!

For coarser roughing operations and ETC operations, we recommend a Weldon in conjunction with a Weldon chuck.


Material P 1.1-1.3

															
			fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
3	6	0.5°	0.015	3	3	0.02	0.9	L2max	0.013	0.2	L2max	0.045	0.8	L2max	0.0398
4	8	0.5°	0.015	4	4	0.02	1.2	L2max	0.013	0.2	L2max	0.06	1.1	L2max	0.0536
5	9	0.5°	0.025	5	5	0.03	1.5	L2max	0.02	0.2	L2max	0.07	1.3	L2max	0.0614
6	10	0.8°	0.035	6	6	0.04	1.8	L2max	0.025	0.2	L2max	0.09	1.6	L2max	0.0796
8	12	1°	0.045	8	8	0.055	2.4	L2max	0.03	0.2	L2max	0.11	1.9	L2max	0.0936
10	14	1.5°	0.05	10	10	0.065	3	L2max	0.033	0.2	L2max	0.13	2.3	L2max	0.1094
12	16	2°	0.055	12	12	0.075	3.6	L2max	0.035	0.2	L2max	0.15	2.6	L2max	0.1236
16	22	2.5°	0.065	16	16	0.085	4.8	L2max	0.04	0.2	L2max	0.17	3.3	L2max	0.1376
20	26	3°	0.08	20	20	0.1	6	L2max	0.045	0.2	L2max	0.2	3.6	L2max	0.1532

Cooling	
Tolerance	e8
Coating	BetaUni Iron

Strategy	ETC	HPC	UNI	Basic
Application				
Features	HB	≠		

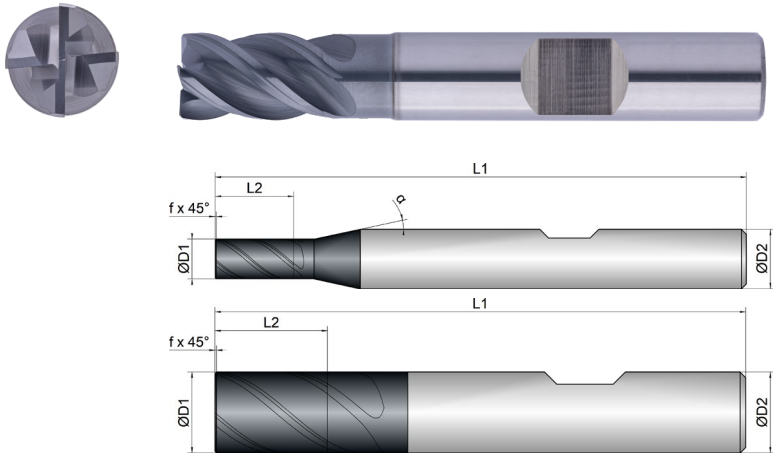- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- Large chip chambers for good chip evacuation



Roughing					Finishing			
inappropriate					optimal			
BCU1-M01-0204	D1 mm Ø	L2 mm	L1 mm	D2 mm Ø	z #	45° mm	°	α °
3	3.0	6.0	54.0	6.0	4	0.10	40	12
4	4.0	8.0	54.0	6.0	4	0.10	40	12
5	5.0	9.0	54.0	6.0	4	0.20	40	12
6	6.0	10.0	54.0	6.0	4	0.20	40	0
8	8.0	12.0	58.0	8.0	4	0.20	40	0
10	10.0	14.0	66.0	10.0	4	0.20	40	0
12	12.0	16.0	73.0	12.0	4	0.20	40	0
16	16.0	22.0	82.0	16.0	4	0.30	40	0
20	20.0	26.0	92.0	20.0	4	0.30	40	0

Download Catalog Pages (PDF)			Full Slot	Side Milling	Finishing	ETC	Materialgroup Factor fz / a	Materialgroup Factor ae ETC
P	STEEL	Strength (N/mm²)	Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850	200	200	220	315	1	1
2.1-2.2	low alloyed	<950	190	190	210	232	0.9	0.8
3.1-3.2	high alloyed	<1100	170	170	190	198	0.8	0.7
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000	210	210	230	242	0.9	0.8
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850		90	95	152	0.9	0.7
2.1	austenitic	<650		80	85	132	0.8	0.5
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/cast	<600	400	400	420	500	1.6	2
3.1-3.3	COPPER alloyed	<600	200	200	220	262	1.5	1.6
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000		50	53	75	0.8	0.5
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	HRSA	<1450		25	28	42	0.7	0.3
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1, consider factors for the other groups! When helical and ramping use fz 50 % of the full slot. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material groups T and S, the use of cooling lubricant is recommended!								

D1	L2	Immersion Angle	Full Slot			Side Milling			Finishing			ETC			
			fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
3	6	0.5°	0.015	3	3	0.02	0.9	L2max	0.013	0.2	L2max	0.045	0.8	L2max	0.0398
4	8	0.5°	0.015	4	4	0.02	1.2	L2max	0.013	0.2	L2max	0.06	1.1	L2max	0.0536
5	9	0.5°	0.025	5	5	0.03	1.5	L2max	0.02	0.2	L2max	0.07	1.3	L2max	0.0614
6	10	0.8°	0.035	6	6	0.04	1.8	L2max	0.025	0.2	L2max	0.09	1.6	L2max	0.0796
8	12	1°	0.045	8	8	0.055	2.4	L2max	0.03	0.2	L2max	0.11	1.9	L2max	0.0936
10	14	1.5°	0.05	10	10	0.065	3	L2max	0.033	0.2	L2max	0.13	2.3	L2max	0.1094
12	16	2°	0.055	12	12	0.075	3.6	L2max	0.035	0.2	L2max	0.15	2.6	L2max	0.1236
16	22	2.5°	0.065	16	16	0.085	4.8	L2max	0.04	0.2	L2max	0.17	3.3	L2max	0.1376
20	26	3°	0.08	20	20	0.1	6	L2max	0.045	0.2	L2max	0.2	3.6	L2max	0.1537

Cooling

Tolerance

e8

Coating

BetaUni Iron

Strategy

ETCHPCUNI

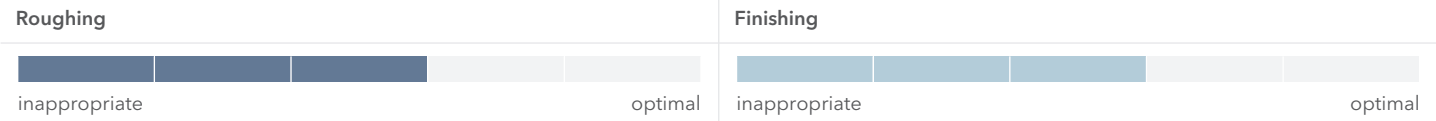
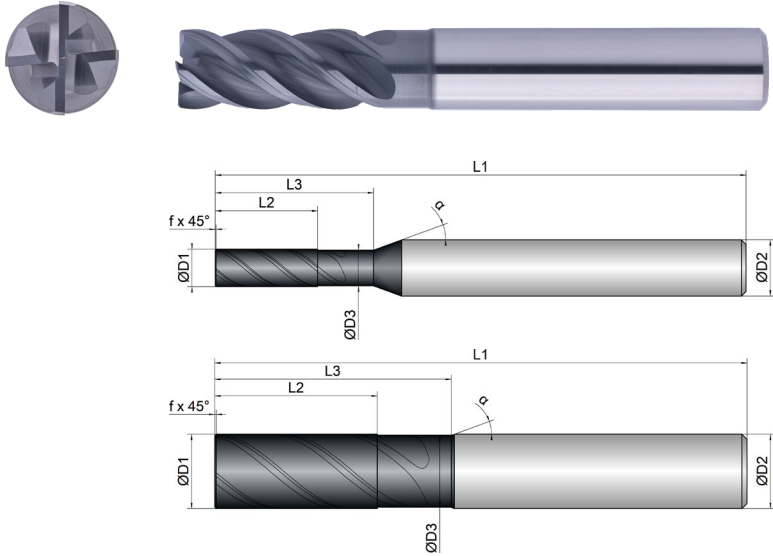
Application

Features

HA≠2xD45°

Basic

- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- Large chip chambers for good chip evacuation



BCU1-M01-0213	D1	D3	L2	L3	L1	D2	z	45°		α
2	2.0	1.8	5.0	10.0	57.0	6.0	4	0.10	40	20
3	3.0	2.8	8.0	13.0	57.0	6.0	4	0.10	40	20
4	4.0	3.8	11.0	17.0	57.0	6.0	4	0.10	40	20
5	5.0	4.8	13.0	20.0	57.0	6.0	4	0.20	40	20
6	6.0	5.8	13.0	20.0	57.0	6.0	4	0.20	40	20
7	7.0	6.5	16.0	25.0	63.0	8.0	4	0.20	40	20
8	8.0	7.7	19.0	25.0	63.0	8.0	4	0.20	40	20
10	10.0	9.7	22.0	32.0	72.0	10.0	4	0.20	40	20
12	12.0	11.6	26.0	38.0	83.0	12.0	4	0.20	40	20
14	14.0	13.0	30.0	36.0	83.0	14.0	4	0.25	40	20
16	16.0	15.5	32.0	44.0	92.0	16.0	4	0.30	40	20
18	18.0	17.0	38.0	42.0	92.0	18.0	4	0.30	40	20

BCU1-M01-0213	D1	D3	L2	L3	L1	D2	z	45°		α
20	20.0	19.5	41.0	54.0	104.0	20.0	4	0.30	40	20
25	25.0	24.0	52.0	62.0	125.0	25.0	4	0.30	40	20



Download Catalog
Pages (PDF)

			Full Slot	Side Milling	Finishing	ETC		
							Materialgroup Factor fz / a	Materialgroup Factor ae ETC
Material		Strength (N/mm²)	Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
P	STEEL							
1.1-1.3	unalloyed	<850	200	200	220	315	1	1
2.1-2.2	low alloyed	<950	190	190	210	232	0.9	0.8
3.1-3.2	high alloyed	<1100	170	170	190	198	0.8	0.7
K	CASTINGS							
1.1-1.2	grey cast iron	<1000	210	210	230	242	0.9	0.8
M	STAINLESS STEEL							
1.1	ferritic/martensitic	<850		90	95	152	0.9	0.7
2.1	austenitic	<650		80	85	132	0.8	0.5
N	NON-FERROUS							
1.1-2.3	ALUMINIUM alloyed/cast	<600	400	400	420	500	1.6	2
3.1-3.3	COPPER alloyed	<600	200	200	220	262	1.5	1.6
T	TITANIUM							
2.1-2.2	pure/alloyed	<1000		50	53	75	0.8	0.5
S	SUPER ALLOYS							
1.1-1.3	HRSA	<1450		25	28	42	0.7	0.3
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1, consider factors for the other groups! When helical and ramping use fz 50 % of the full slot. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material groups T and S, the use of cooling lubricant is recommended! For coarser roughing operations and ETC operations, we recommend a Weldon in conjunction with a Weldon chuck.								

Material P 1.1-1.3

D1 	L2 	Immersion Angle 	Full Slot 			Side Milling 			Finishing 			ETC 			
			fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
2	5	0.5°	0.012	2	2	0.015	0.6	L2max	0.011	0.2	L2max	0.03	0.6	L2max	0.0275
3	8	0.5°	0.015	3	3	0.02	0.9	L2max	0.013	0.2	L2max	0.045	0.8	L2max	0.0398
4	11	0.5°	0.015	4	4	0.02	1.2	L2max	0.013	0.2	L2max	0.06	1.1	L2max	0.0536
5	13	0.5°	0.025	5	5	0.03	1.5	L2max	0.02	0.2	L2max	0.07	1.3	L2max	0.0614
6	13	0.8°	0.035	6	6	0.04	1.8	L2max	0.022	0.2	L2max	0.09	1.6	L2max	0.0796
7	16	0.9°	0.04	7	7	0.045	2.1	L2max	0.025	0.2	L2max	0.1	1.7	L2max	0.0858
8	19	1°	0.045	8	8	0.055	2.4	L2max	0.028	0.2	L2max	0.11	1.9	L2max	0.0936
10	22	1.5°	0.05	10	10	0.065	3	L2max	0.033	0.2	L2max	0.13	2.3	L2max	0.1094
12	26	2°	0.055	12	12	0.075	3.6	L2max	0.035	0.2	L2max	0.15	2.6	L2max	0.1236
14	30	2.2°	0.06	14	14	0.08	4.2	L2max	0.036	0.2	L2max	0.16	3	L2max	0.1313
16	32	2.5°	0.065	16	16	0.085	4.8	L2max	0.038	0.2	L2max	0.17	3.3	L2max	0.1376
18	38	2.8°	0.07	18	18	0.095	5.4	L2max	0.04	0.2	L2max	0.185	3.4	L2max	0.1448
20	41	3°	0.08	20	20	0.1	6	L2max	0.042	0.2	L2max	0.2	3.6	L2max	0.1537
25	52	3.5°	0.09	25	25	0.11	7.5	L2max	0.045	0.2	L2max	0.22	3.9	L2max	0.1597

STILL CAN'T FIND A
SUITABLE MILLING
CUTTER?

No problem – simply customize an existing tool. Using our configurator for special milling cutters, you can customize existing tools to your needs in an instant or create your own tools based on predefined types.

WE WILL RESPOND TO ALL
REQUESTS SUBMITTED VIA THE
CONFIGURATOR WITHIN ONE
WORKING DAY AT THE LATEST



Cooling

Tolerance

e8

Coating

BetaUni Iron

Strategy

ETC

HPC

UNI

Application

Features

HB


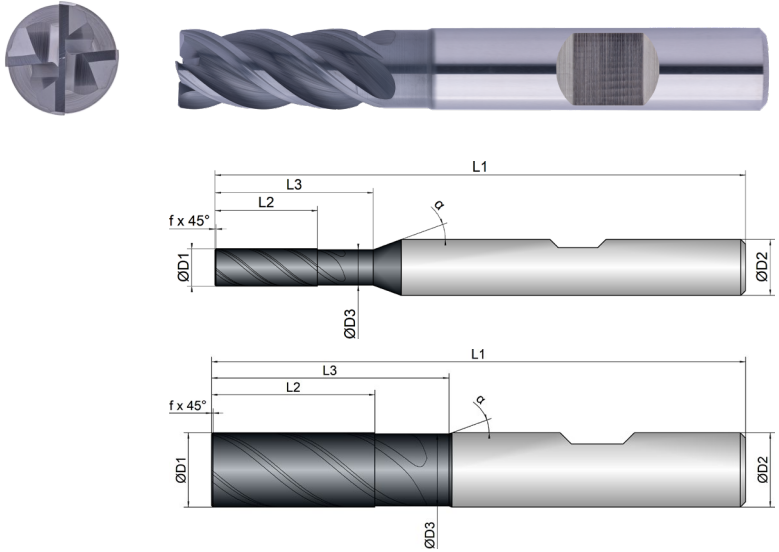
≠

2xD

45°

Basic

- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- Large chip chambers for good chip evacuation



BCU1-M01-0214	D1	D3	L2	L3	L1	D2	z			α
								mm	°	°
2	2.0	1.8	5.0	10.0	57.0	6.0	4	0.10	40	20
3	3.0	2.8	8.0	13.0	57.0	6.0	4	0.10	40	20
4	4.0	3.8	11.0	17.0	57.0	6.0	4	0.10	40	20
5	5.0	4.8	13.0	20.0	57.0	6.0	4	0.20	40	20
6	6.0	5.8	13.0	20.0	57.0	6.0	4	0.20	40	20
7	7.0	6.5	16.0	25.0	63.0	8.0	4	0.20	40	20
8	8.0	7.7	19.0	25.0	63.0	8.0	4	0.20	40	20
10	10.0	9.7	22.0	32.0	72.0	10.0	4	0.20	40	20
12	12.0	11.6	26.0	38.0	83.0	12.0	4	0.20	40	20
14	14.0	13.0	30.0	36.0	83.0	14.0	4	0.25	40	20
16	16.0	15.5	32.0	44.0	92.0	16.0	4	0.30	40	20
18	18.0	17.0	38.0	42.0	92.0	18.0	4	0.30	40	20

BCU1-M01-0214	D1	D3	L2	L3	L1	D2	z			α
								mm	°	°
20	20.0	19.5	41.0	54.0	104.0	20.0	4	0.30	40	20
25	25.0	24.0	52.0	62.0	125.0	25.0	4	0.30	40	20



Download Catalog
Pages (PDF)

			Full Slot	Side Milling	Finishing	ETC		
							Materialgroup Factor fz / a	Materialgroup Factor ae ETC
Material		Strength (N/mm²)	Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
P	STEEL							
1.1-1.3	unalloyed	<850	200	200	220	315	1	1
2.1-2.2	low alloyed	<950	190	190	210	232	0.9	0.8
3.1-3.2	high alloyed	<1100	170	170	190	198	0.8	0.7
K	CASTINGS							
1.1-1.2	grey cast iron	<1000	210	210	230	242	0.9	0.8
M	STAINLESS STEEL							
1.1	ferritic/martensitic	<850		90	95	152	0.9	0.7
2.1	austenitic	<650		80	85	132	0.8	0.5
N	NON-FERROUS							
1.1-2.3	ALUMINIUM alloyed/cast	<600	400	400	420	500	1.6	2
3.1-3.3	COPPER alloyed	<600	200	200	220	262	1.5	1.6
T	TITANIUM							
2.1-2.2	pure/alloyed	<1000		50	53	75	0.8	0.5
S	SUPER ALLOYS							
1.1-1.3	HRSA	<1450		25	28	42	0.7	0.3
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1, consider factors for the other groups! When helical and ramping use fz 50 % of the full slot. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material groups T and S, the use of cooling lubricant is recommended!								

Material P 1.1-1.3

D1 	L2 	Immersion Angle 	Full Slot 			Side Milling 			Finishing 			ETC 			
			fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
2	5	0.5°	0.012	2	2	0.015	0.6	L2max	0.011	0.2	L2max	0.03	0.6	L2max	0.0275
3	8	0.5°	0.015	3	3	0.02	0.9	L2max	0.013	0.2	L2max	0.045	0.8	L2max	0.0398
4	11	0.5°	0.015	4	4	0.02	1.2	L2max	0.013	0.2	L2max	0.06	1.1	L2max	0.0536
5	13	0.5°	0.025	5	5	0.03	1.5	L2max	0.02	0.2	L2max	0.07	1.3	L2max	0.0614
6	13	0.8°	0.035	6	6	0.04	1.8	L2max	0.022	0.2	L2max	0.09	1.6	L2max	0.0796
7	16	0.9°	0.04	7	7	0.045	2.1	L2max	0.025	0.2	L2max	0.1	1.7	L2max	0.0858
8	19	1°	0.045	8	8	0.055	2.4	L2max	0.028	0.2	L2max	0.11	1.9	L2max	0.0936
10	22	1.5°	0.05	10	10	0.065	3	L2max	0.033	0.2	L2max	0.13	2.3	L2max	0.1094
12	26	2°	0.055	12	12	0.075	3.6	L2max	0.035	0.2	L2max	0.15	2.6	L2max	0.1236
14	30	2.2°	0.06	14	14	0.08	4.2	L2max	0.036	0.2	L2max	0.16	3	L2max	0.1313
16	32	2.5°	0.065	16	16	0.085	4.8	L2max	0.038	0.2	L2max	0.17	3.3	L2max	0.1376
18	38	2.8°	0.07	18	18	0.095	5.4	L2max	0.04	0.2	L2max	0.185	3.4	L2max	0.1448
20	41	3°	0.08	20	20	0.1	6	L2max	0.042	0.2	L2max	0.2	3.6	L2max	0.1537
25	52	3.5°	0.09	25	25	0.11	7.5	L2max	0.045	0.2	L2max	0.22	3.9	L2max	0.1597

STILL CAN'T FIND A
SUITABLE MILLING
CUTTER?

No problem – simply customize an existing tool. Using our configurator for special milling cutters, you can customize existing tools to your needs in an instant or create your own tools based on predefined types.

WE WILL RESPOND TO ALL
REQUESTS SUBMITTED VIA THE
CONFIGURATOR WITHIN ONE
WORKING DAY AT THE LATEST




Cooling	
Tolerance	e8
Coating	BetaUni Iron

Strategy	ETC	HPC	UNI	
Application				
Features	HA	≠	3xD	



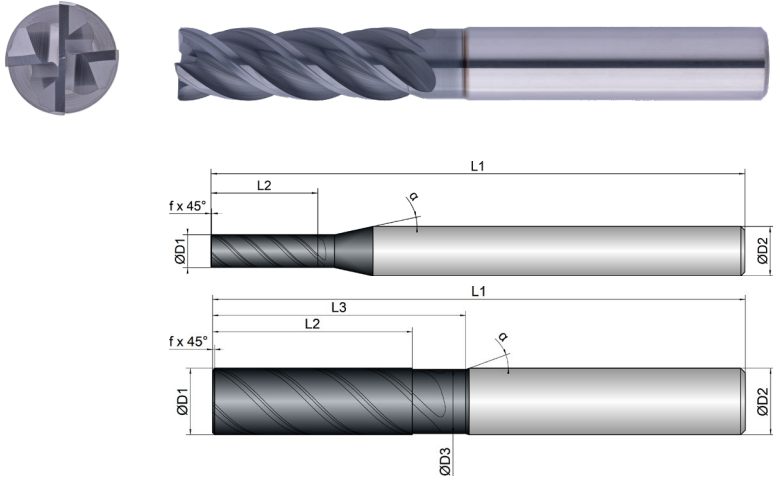- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- Large chip chambers for good chip evacuation



Roughing					Finishing				
inappropriate					inappropriate				
optimal					optimal				

BCU1-M01-0223	D1 mm ø	D3 mm ø	L2 mm	L3 mm	L1 mm	D2 mm ø	z #	mm	°	α °
4	4.0	0.0	13.0	0.0	65.0	6.0	4	0.10	40	12
5	5.0	0.0	16.0	0.0	65.0	6.0	4	0.20	40	12
6	6.0	5.6	18.0	24.0	65.0	6.0	4	0.20	40	20
8	8.0	7.6	24.0	30.0	70.0	8.0	4	0.20	40	20
10	10.0	9.6	30.0	38.0	80.0	10.0	4	0.20	40	20
12	12.0	11.4	36.0	46.0	93.0	12.0	4	0.20	40	20
16	16.0	15.4	48.0	58.0	110.0	16.0	4	0.30	40	20
20	20.0	19.4	60.0	74.0	126.0	20.0	4	0.30	40	20

Download Catalog Pages (PDF)

			Full Slot	Side Milling	Finishing	ETC	Materialgroup Factor fz / α	Materialgroup Factor ae ETC
P	Material	Strength (N/mm²)	Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850	190	190	210	305	1	1
2.1-2.2	low alloyed	<950	180	180	200	222	0.9	0.8
3.1-3.2	high alloyed	<1100	160	160	180	188	0.8	0.7
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000	200	200	220	232	0.9	0.8
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850		85	90	142	0.9	0.7
2.1	austenitic	<650		75	80	122	0.8	0.5
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/cast	<600	380	380	400	500	1.6	2
3.1-3.3	COPPER alloyed	<600	180	180	200	242	1.5	1.6
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000		45	50	75	0.8	0.5
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	HRSA	<1450		20	25	42	0.7	0.3
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1, consider factors for the other groups! When helical and ramping use fz 50 % of the full slot. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material groups T and S, the use of cooling lubricant is recommended! For coarser roughing operations and ETC operations, we recommend a Weldon in conjunction with a Weldon chuck.								


Material P 1.1-1.3

D1 mm ø	L2 mm	Immersion Angle α°	Full Slot			Side Milling			Finishing			ETC			
			fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
4	13	0.5°	0.012	4	4	0.018	1.2	L2max	0.015	0.2	L2max	0.04	0.48	L2max	0.026
5	16	0.5°	0.022	5	5	0.028	1.5	L2max	0.02	0.2	L2max	0.05	0.6	L2max	0.0325
6	18	0.8°	0.032	6	6	0.038	1.8	L2max	0.025	0.2	L2max	0.07	0.72	L2max	0.0455
8	24	1°	0.042	8	8	0.052	2.4	L2max	0.03	0.2	L2max	0.09	0.96	L2max	0.0585
10	30	1.5°	0.048	10	10	0.06	3	L2max	0.035	0.2	L2max	0.11	1.2	L2max	0.0715
12	36	2°	0.052	12	12	0.07	3.6	L2max	0.04	0.2	L2max	0.12	1.44	L2max	0.078
16	48	2.5°	0.06	16	16	0.08	4.8	L2max	0.045	0.2	L2max	0.14	1.92	L2max	0.091
20	60	3°	0.075	20	20	0.09	6	L2max	0.05	0.2	L2max	0.16	2.4	L2max	0.104

Cooling	   
Tolerance	e8
Coating	BetaUni Iron

Strategy	ETC	HPC	UNI			 Basic
Application						
Features	HB	≠	3xD		45°	

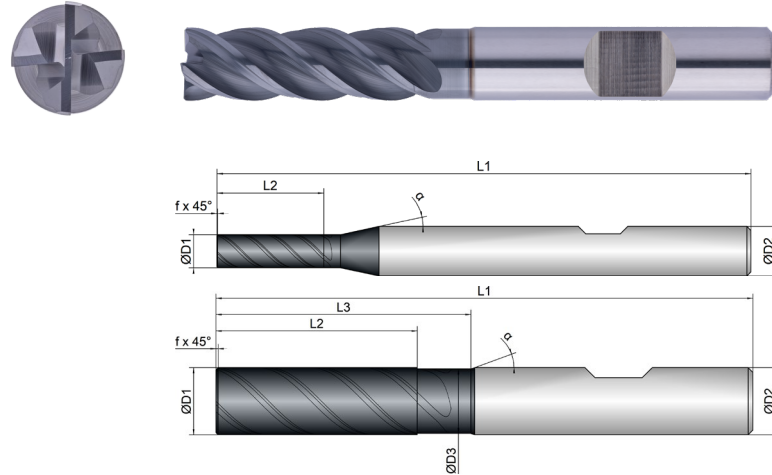- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- Large chip chambers for good chip evacuation





Roughing

inappropriate optimal

Finishing

inappropriate optimal

BCU1-M01-0224	D1	D3	L2	L3	L1	D2	z			α
	 mm $\varnothing$	 mm $\varnothing$	 mm	 mm	 mm	 mm $\varnothing$	 #	 mm	 °	 °
4	4.0	0.0	13.0	0.0	65.0	6.0	4	0.10	40	12
5	5.0	0.0	16.0	0.0	65.0	6.0	4	0.20	40	12
6	6.0	5.6	18.0	24.0	65.0	6.0	4	0.20	40	20
8	8.0	7.6	24.0	30.0	70.0	8.0	4	0.20	40	20
10	10.0	9.6	30.0	38.0	80.0	10.0	4	0.20	40	20
12	12.0	11.4	36.0	46.0	93.0	12.0	4	0.20	40	20
16	16.0	15.4	48.0	58.0	110.0	16.0	4	0.30	40	20
20	20.0	19.4	60.0	74.0	126.0	20.0	4	0.30	40	20



Download Catalog
Pages (PDF)

 Download Catalog Pages (PDF)								
	Material	Strength (N/mm²)	Full Slot	Side Milling	Finishing	ETC	Materialgroup Factor fz / a	Materialgroup Factor ae ETC
P	STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850	190	190	210	305	1	1
2.1-2.2	low alloyed	<950	180	180	200	222	0.9	0.8
3.1-3.2	high alloyed	<1100	160	160	180	188	0.8	0.7
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000	200	200	220	232	0.9	0.8
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850		85	90	142	0.9	0.7
2.1	austenitic	<650		75	80	122	0.8	0.5
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/cast	<600	380	380	400	500	1.6	2
3.1-3.3	COPPER alloyed	<600	180	180	200	242	1.5	1.6
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000		45	50	75	0.8	0.5
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	HRSA	<1450		20	25	42	0.7	0.3
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1, consider factors for the other groups! When helical and ramping use fz 50 % of the full slot. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material groups T and S, the use of cooling lubricant is recommended!								


Material P 1.1-1.3

		Immersion Angle 	Full Slot 			Side Milling 			Finishing 			ETC 			
Ø	mm	α°	fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
4	13	0.5°	0.012	4	4	0.018	1.2	L2max	0.015	0.2	L2max	0.04	0.48	L2max	0.026
5	16	0.5°	0.022	5	5	0.028	1.5	L2max	0.02	0.2	L2max	0.05	0.6	L2max	0.0325
6	18	0.8°	0.032	6	6	0.038	1.8	L2max	0.025	0.2	L2max	0.07	0.72	L2max	0.0455
8	24	1°	0.042	8	8	0.052	2.4	L2max	0.03	0.2	L2max	0.09	0.96	L2max	0.0585
10	30	1.5°	0.048	10	10	0.06	3	L2max	0.035	0.2	L2max	0.11	1.2	L2max	0.0715
12	36	2°	0.052	12	12	0.07	3.6	L2max	0.04	0.2	L2max	0.12	1.44	L2max	0.078
16	48	2.5°	0.06	16	16	0.08	4.8	L2max	0.045	0.2	L2max	0.14	1.92	L2max	0.091
20	60	3°	0.075	20	20	0.09	6	L2max	0.05	0.2	L2max	0.16	2.4	L2max	0.104

Cooling	
Tolerance	e8
Coating	BetaUni Iron

Strategy	ETC	HPC	UNI	Basic
Application				
Features	HA	≠	2xD	

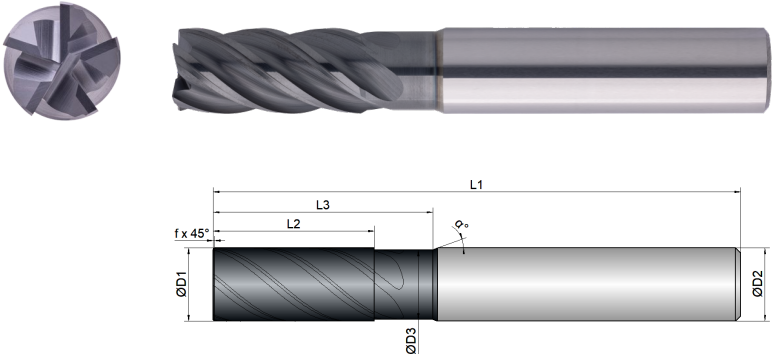- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- 5 cutting edges for high feedrates



Roughing						Finishing				
inappropriateoptimal						inappropriateoptimal				
BCU1-M01-0313	D1	D3	L2	L3	L1	D2	z			α
	mm ø	mm ø	mm	mm	mm	mm ø	#	mm	°	°
6	6.0	5.5	13.0	20.0	57.0	6.0	5	0.15	40	20
8	8.0	7.5	19.0	25.0	63.0	8.0	5	0.20	40	20
10	10.0	9.5	22.0	30.0	72.0	10.0	5	0.20	40	20
12	12.0	11.0	26.0	36.0	83.0	12.0	5	0.25	40	20
16	16.0	15.0	34.0	42.0	92.0	16.0	5	0.30	40	20
20	20.0	19.0	42.0	52.0	104.0	20.0	5	0.30	40	20

Download Catalog Pages (PDF)

		Side Milling		Finishing		ETC		Materialgroup Factor fz / a	Materialgroup Factor ae ETC
Material		Strength (N/mm²)							
P	STEEL	Vc = m/min		Vc = m/min		Vc = m/min			
1.1-1.3	unalloyed	<850	200	220	315	1	1		
2.1-2.2	low alloyed	<950	190	210	232	0.9	0.8		
3.1-3.2	high alloyed	<1100	170	190	198	0.8	0.7		
K	CASTINGS	Vc = m/min		Vc = m/min		Vc = m/min			
1.1-1.2	grey cast iron	<1000	210	230	242	0.9	0.8		
M	STAINLESS STEEL	Vc = m/min		Vc = m/min		Vc = m/min			
1.1	ferritic/martensitic	<850	90	95	152	0.9	0.7		
2.1	austenitic	<650	80	85	132	0.8	0.5		
N	NON-FERROUS	Vc = m/min		Vc = m/min		Vc = m/min			
1.1-2.3	ALUMINIUM alloyed/cast	<600	400	420	500	1.6	2		
3.1-3.3	COPPER alloyed	<600	200	220	262	1.5	1.6		
T	TITANIUM	Vc = m/min		Vc = m/min		Vc = m/min			
2.1-2.2	pure/alloyed	<1000	50	53	75	0.8	0.5		
S	SUPER ALLOYS	Vc = m/min		Vc = m/min		Vc = m/min			
1.1-1.3	HRSA	<1450	25	28	42	0.7	0.3		
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1-1.3, consider factors for the other groups! When helical and ramping use fz 50 % of the full slot. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material groups T and S, the use of cooling lubricant is recommended! For coarser roughing operations and ETC operations, we recommend a Weldon in conjunction with a Weldon chuck.									


Material P 1.1-1.3







D1	L2	Immersion Angle	Side Milling			Finishing			ETC			
			fz	ae = 0.3xD	ap	fz	ae	ap	fz	ae	ap	hmax
Ø	mm	α°	(mm/Z)	(mm)	(mm)	(mm/Z)	(mm)	(mm)	(mm/Z)	(mm)	(mm)	(mm)
6	13	0.8°	0.035	1.8	L2max	0.02	0.2	L2max	0.072	1.2	L2max	0.0576
8	19	0.8°	0.05	2.4	L2max	0.025	0.2	L2max	0.088	1.4	L2max	0.0669
10	22	1°	0.06	3	L2max	0.03	0.2	L2max	0.105	1.7	L2max	0.0789
12	26	1°	0.07	3.6	L2max	0.035	0.2	L2max	0.12	2	L2max	0.0894
16	34	1.3°	0.08	4.8	L2max	0.038	0.2	L2max	0.135	2.5	L2max	0.098
20	42	1.8°	0.095	6	L2max	0.04	0.2	L2max	0.16	2.8	L2max	0.111

Cooling	   
Tolerance	e8
Coating	BetaUni Iron

Strategy	ETC	HPC	UNI					 Basic
Application								
Features	HB	≠	2xD					

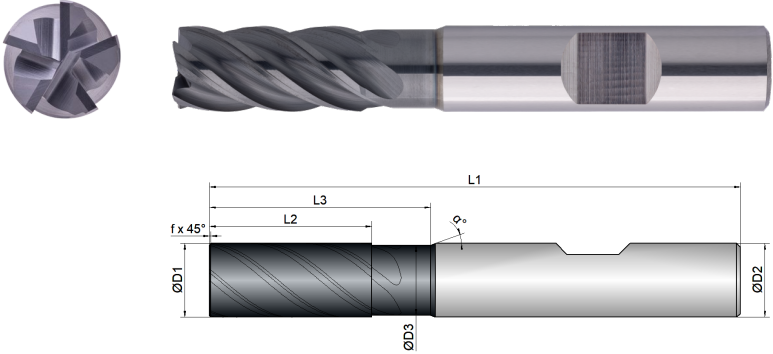- Adapted clearance angle for reliable machining
- Unequal tooth pitch for smooth running
- 5 cutting edges for high feedrates



Roughing						Finishing				
										
inappropriate						optimal				
BCU1-M01-0314	D1  mm Ø	D3  mm Ø	L2  mm	L3  mm	L1  mm	D2  mm Ø	z  #	 mm	 °	α  °
6	6.0	5.5	13.0	20.0	57.0	6.0	5	0.15	40	20
8	8.0	7.5	19.0	25.0	63.0	8.0	5	0.20	40	20
10	10.0	9.5	22.0	30.0	72.0	10.0	5	0.20	40	20
12	12.0	11.0	26.0	36.0	83.0	12.0	5	0.25	40	20
16	16.0	15.0	34.0	42.0	92.0	16.0	5	0.30	40	20
20	20.0	19.0	42.0	52.0	104.0	20.0	5	0.30	40	20

			 Download Catalog Pages (PDF)		Side Milling 	Finishing 	ETC 	Materialgroup Factor fz / α	Materialgroup Factor ae ETC
Material	Strength (N/mm²)				Vc = m/min	Vc = m/min	Vc = m/min		
P	STEEL				Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850			200	220	315	1	1
2.1-2.2	low alloyed	<950			190	210	232	0.9	0.8
3.1-3.2	high alloyed	<1100			170	190	198	0.8	0.7
K	CASTINGS				Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000			210	230	242	0.9	0.8
M	STAINLESS STEEL				Vc = m/min	Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850			90	95	152	0.9	0.7
2.1	austenitic	<650			80	85	132	0.8	0.5
N	NON-FERROUS				Vc = m/min	Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/cast	<600			400	420	500	1.6	2
3.1-3.3	COPPER alloyed	<600			200	220	262	1.5	1.6
T	TITANIUM				Vc = m/min	Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000			50	53	75	0.8	0.5
S	SUPER ALLOYS				Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	HRSA	<1450			25	28	42	0.7	0.3
ADVICE The values marked in turquoise are side applications! All fz/α values in the table for material group 1.1-1.3, consider factors for the other groups! When helical and ramping use fz 50 % of the full slot. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material groups T and S, the use of cooling lubricant is recommended!									


Material P 1.1-1.3






D1 	L2 	Immersion Angle 	Side Milling 			Finishing 			ETC 			
Ø	mm	α°	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
6	13	0.8°	0.035	1.8	L2max	0.02	0.2	L2max	0.072	1.2	L2max	0.0576
8	19	0.8°	0.05	2.4	L2max	0.025	0.2	L2max	0.088	1.4	L2max	0.0669
10	22	1°	0.06	3	L2max	0.03	0.2	L2max	0.105	1.7	L2max	0.0789
12	26	1°	0.07	3.6	L2max	0.035	0.2	L2max	0.12	2	L2max	0.0894
16	34	1.3°	0.08	4.8	L2max	0.038	0.2	L2max	0.135	2.5	L2max	0.098
20	42	1.8°	0.095	6	L2max	0.04	0.2	L2max	0.16	2.8	L2max	0.111




Cooling	   
Tolerance	e8
Coating	BetaUni Iron

Strategy	ETC	HPC	UNI	
Application	   			
Features	HA	≠	2xD	 

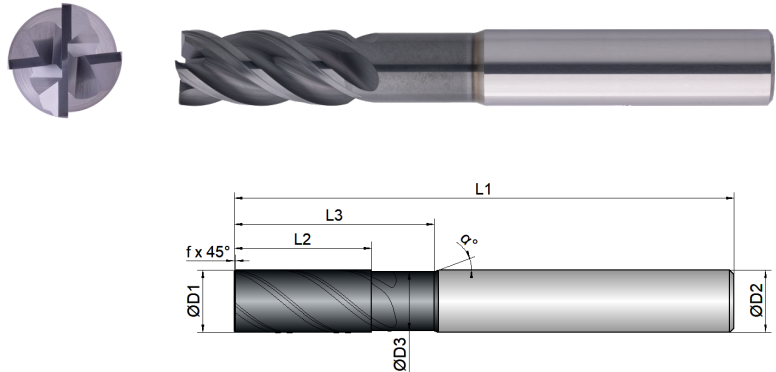- Clearance angle and unequal tooth pitch for vibration-free milling
 - Tool core and chip chambers adapted for stability
- Long version for deeper cavities



Roughing					Finishing				
									
inappropriate					inappropriate				
					optimal				

BCU1-M01-0413	D1  mm ø	D3  mm ø	L2  mm	L3  mm	L1  mm	D2  mm ø	z  #	 mm	 °	 °
6	6.0	5.5	13.0	26.0	65.0	6.0	4	0.15	40	20
8	8.0	7.5	19.0	30.0	70.0	8.0	4	0.20	40	20
10	10.0	9.5	22.0	38.0	80.0	10.0	4	0.20	40	20
12	12.0	11.0	26.0	46.0	93.0	12.0	4	0.25	40	20
16	16.0	15.0	34.0	60.0	110.0	16.0	4	0.30	40	20
20	20.0	19.0	42.0	72.0	126.0	20.0	4	0.30	40	20

 Download Catalog Pages (PDF)			Full Slot	Side Milling	Finishing	ETC	Materialgroup Factor fz / a	Materialgroup Factor ae ETC
Material	Strength (N/mm ²)							
P	STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850	190	190	210	305	1	1
2.1-2.2	low alloyed	<950	180	180	200	222	0.9	0.8
3.1-3.2	high alloyed	<1100	160	160	180	188	0.8	0.7
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000	200	200	220	232	0.9	0.8
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850		85	90	142	0.9	0.7
2.1	austenitic	<650		75	80	122	0.8	0.5
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/ cast	<600	380	380	400	500	1.6	2
3.1-3.3	COPPER alloyed	<600	180	180	200	242	1.5	1.6
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000		45	50	75	0.8	0.5
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	HRSA	<1450		20	25	42	0.7	0.3
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1 - 1.3, consider factors for the other groups! When helical and ramping use fz 50 % of side milling. The specified values represent starting values for a solid clamping situation. For material groups T and S, the use of cooling lubricant is recommended!								


Material P 1.1-1.3



D1  ø	L2  mm	Immersion Angle  α°	Full Slot			Side Milling			Finishing			ETC			
			fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
6	18	0.8°	0.032	6	6	0.038	1.8	L2max	0.025	0.2	L2max	0.07	0.72	L2max	0.0455
8	24	1°	0.042	8	8	0.052	2.4	L2max	0.03	0.2	L2max	0.09	0.96	L2max	0.0585
10	30	1.5°	0.048	10	10	0.06	3	L2max	0.035	0.2	L2max	0.11	1.2	L2max	0.0715
12	36	2°	0.052	12	12	0.07	3.6	L2max	0.04	0.2	L2max	0.12	1.44	L2max	0.078
16	48	2.5°	0.06	16	16	0.08	4.8	L2max	0.045	0.2	L2max	0.14	1.92	L2max	0.091
20	60	3°	0.075	20	20	0.09	6	L2max	0.05	0.2	L2max	0.16	2.4	L2max	0.104

Cooling	   
Tolerance	e8
Coating	BetaUni Iron

Strategy	ETC	HPC	UNI	
Application	   			
Features	HB	≠	2xD	 

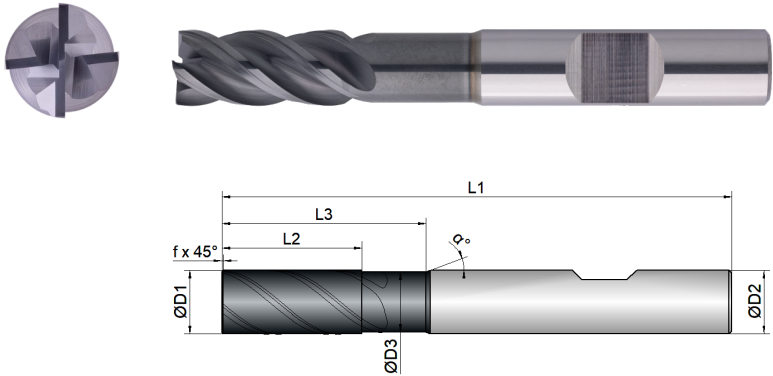- Clearance angle and unequal tooth pitch for vibration-free milling
- Tool core and chip chambers adapted for stability
- Long version for deeper cavities



Roughing					Finishing					
										
inappropriate					inappropriate					
optimal					optimal					
BCU1-M01-0414	D1	D3	L2	L3	L1	D2	z			α
										
	mm Ø	mm Ø	mm	mm	mm	mm Ø	#	mm	°	°
6	6.0	5.5	13.0	26.0	65.0	6.0	4	0.15	40	20
8	8.0	7.5	19.0	30.0	70.0	8.0	4	0.20	40	20
10	10.0	9.5	22.0	38.0	80.0	10.0	4	0.20	40	20
12	12.0	11.0	26.0	46.0	93.0	12.0	4	0.25	40	20
16	16.0	15.0	34.0	60.0	110.0	16.0	4	0.30	40	20
20	20.0	19.0	42.0	72.0	126.0	20.0	4	0.30	40	20

 Download Catalog Pages (PDF)			Full Slot	Side Milling	Finishing	ETC	Materialgroup Factor fz / α	Materialgroup Factor ae ETC
								
Material	Strength (N/mm²)		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
P STEEL			Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3 unalloyed	<850		190	190	210	305	1	1
2.1-2.2 low alloyed	<950		180	180	200	222	0.9	0.8
3.1-3.2 high alloyed	<1100		160	160	180	188	0.8	0.7
K CASTINGS			Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.2 grey cast iron	<1000		200	200	220	232	0.9	0.8
M STAINLESS STEEL			Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1 ferritic/martensitic	<850			85	90	142	0.9	0.7
2.1 austenitic	<650			75	80	122	0.8	0.5
N NON-FERROUS			Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-2.3 ALUMINIUM alloyed/cast	<600		380	380	400	500	1.6	2
3.1-3.3 COPPER alloyed	<600		180	180	200	242	1.5	1.6
T TITANIUM			Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
2.1-2.2 pure/alloyed	<1000			45	50	75	0.8	0.5
S SUPER ALLOYS			Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3 HRSA	<1450			20	25	42	0.7	0.3
ADVICE The values marked in turquoise are side applications! All fz/ α values in the table for material group 1.1 - 1.3, consider factors for the other groups! When helical and ramping use fz 50 % of side milling. The specified values represent starting values for a solid clamping situation. For material groups T and S, the use of cooling lubricant is recommended!								

Material P 1.1-1.3


D1	L2	Immersion Angle	Full Slot			Side Milling			Finishing			ETC			
															
Ø	mm	α°	fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
6	18	0.8°	0.032	6	6	0.038	1.8	L2max	0.025	0.2	L2max	0.07	0.72	L2max	0.0455
8	24	1°	0.042	8	8	0.052	2.4	L2max	0.03	0.2	L2max	0.09	0.96	L2max	0.0585
10	30	1.5°	0.048	10	10	0.06	3	L2max	0.035	0.2	L2max	0.11	1.2	L2max	0.0715
12	36	2°	0.052	12	12	0.07	3.6	L2max	0.04	0.2	L2max	0.12	1.44	L2max	0.078
16	48	2.5°	0.06	16	16	0.08	4.8	L2max	0.045	0.2	L2max	0.14	1.92	L2max	0.091
20	60	3°	0.075	20	20	0.09	6	L2max	0.05	0.2	L2max	0.16	2.4	L2max	0.104


Cooling	   
Tolerance	e8
Coating	BetaUni Iron



Strategy	ETC	HPC	UNI			
Application						
Features	HA	≠		2xD		45°

- Optimized chip chambers for a large chip volume
- Adapted roughing teeth for small chips

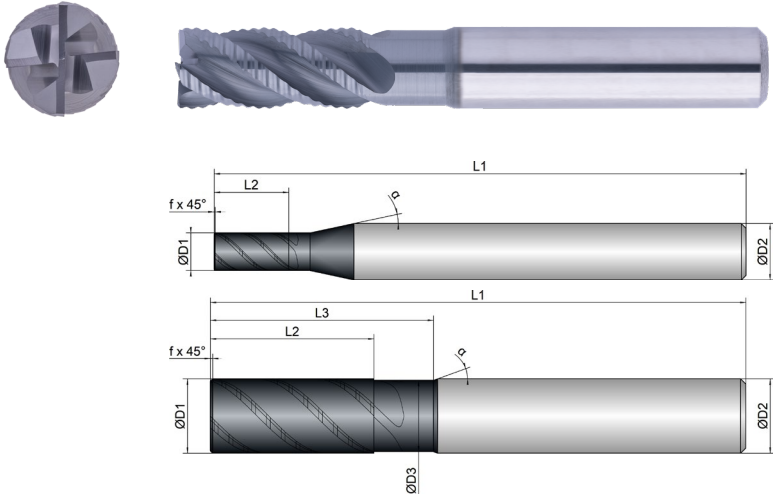- For roughing under HPC conditions



Roughing					Finishing				
									
inappropriate					optimal				

BCU1-M02-0103	D1  mm ø	D3  mm ø	L2  mm	L3  mm	L1  mm	D2  mm ø	z  #	45°  mm	 °	α  °
4	4.0	0.0	8.0	0.0	57.0	6.0	4	0.10	45	12
5	5.0	0.0	9.0	0.0	57.0	6.0	4	0.20	45	12
6	6.0	5.6	13.0	19.0	57.0	6.0	4	0.20	45	20
8	8.0	7.6	19.0	25.0	63.0	8.0	4	0.20	45	20
10	10.0	9.6	22.0	30.0	72.0	10.0	4	0.32	45	20
12	12.0	11.4	26.0	36.0	83.0	12.0	4	0.32	45	20
16	16.0	15.4	32.0	42.0	92.0	16.0	4	0.32	45	20
20	20.0	19.4	41.0	52.0	104.0	20.0	4	0.50	45	20

 Download Catalog Pages (PDF)			Full Slot	Side Milling	ETC	Materialgroup Factor fz / α	Materialgroup Factor ae ETC
P	Material	Strength (N/mm²)	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850	185	185	295	1	1
2.1-2.2	low alloyed	<950	175	175	212	0.9	0.8
3.1-3.2	high alloyed	<1100	165	165	182	0.8	0.7
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000	200	200	224	0.9	0.8
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850	85	85	132	0.9	0.7
2.1	austenitic	<650	75	75	114	0.8	0.5
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/cast	<600	400	400	480	1.6	2
3.1-3.3	COPPER alloyed	<600	200	200	242	1.5	1.6
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000		40	62	0.8	0.5
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	HRSA	<1450					
ADVICE The values marked in turquoise are side applications! All fz/α values in the table for material group 1.1, consider factors for the other groups! When helical and ramping use fz 50 % of the full slot. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material groups T and S, the use of cooling lubricant is recommended! For coarser roughing operations and ETC operations, we recommend a Weldon in conjunction with a Weldon chuck.							

Material P 1.1-1.3


D1  ø	L2  mm	Immersion Angle α° 	Full Slot 			Side Milling 			ETC 			
fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)			
4	8	0.5°	0.015	4	4	0.02	1.2	L2max	0.05	0.58	L2max	0.0352
5	9	0.5°	0.02	5	5	0.03	1.5	L2max	0.06	0.73	L2max	0.0424
6	13	0.8°	0.03	6	6	0.04	1.8	L2max	0.077	0.9	L2max	0.055
8	19	1°	0.04	8	8	0.055	2.4	L2max	0.094	1.2	L2max	0.0671
10	22	1.5°	0.06	10	10	0.08	3	L2max	0.11	1.45	L2max	0.0775
12	26	2°	0.065	12	12	0.09	3.6	L2max	0.128	1.8	L2max	0.0914
16	32	2.5°	0.07	16	16	0.095	4.8	L2max	0.144	2.3	L2max	0.101
20	41	3°	0.08	20	20	0.12	6	L2max	0.17	2.9	L2max	0.1197

Cooling	   
Tolerance	e8
Coating	BetaUni Iron






Strategy							
Application							
Features							

- Optimized chip chambers for a large chip volume
- Adapted roughing teeth for small chips

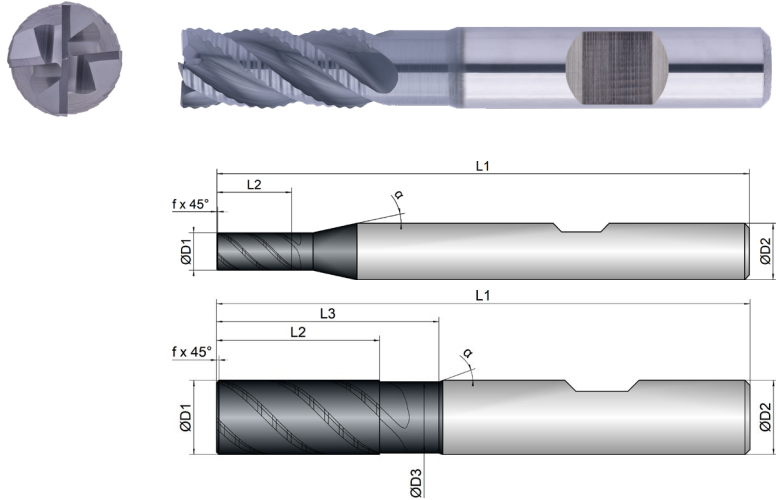- For roughing under HPC conditions



Roughing	Finishing
inappropriateoptimal	inappropriateoptimal

BCU1-M02-0104	D1  mm ø	D3  mm ø	L2  mm	L3  mm	L1  mm	D2  mm ø	z  #	 mm	 °	α  °
4	4.0	0.0	8.0	0.0	57.0	6.0	4	0.10	45	12
5	5.0	0.0	9.0	0.0	57.0	6.0	4	0.20	45	12
6	6.0	5.6	13.0	19.0	57.0	6.0	4	0.20	45	20
8	8.0	7.6	19.0	25.0	63.0	8.0	4	0.20	45	20
10	10.0	9.6	22.0	30.0	72.0	10.0	4	0.32	45	20
12	12.0	11.4	26.0	36.0	83.0	12.0	4	0.32	45	20
16	16.0	15.4	32.0	42.0	92.0	16.0	4	0.32	45	20
20	20.0	19.4	41.0	52.0	104.0	20.0	4	0.50	45	20

			Full Slot	Side Milling	ETC	Materialgroup Factor fz / α	Materialgroup Factor ae ETC
P	Material	Strength (N/mm²)	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850	185	185	295	1	1
2.1-2.2	low alloyed	<950	175	175	212	0.9	0.8
3.1-3.2	high alloyed	<1100	165	165	182	0.8	0.7
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000	200	200	224	0.9	0.8
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850	85	85	132	0.9	0.7
2.1	austenitic	<650	75	75	114	0.8	0.5
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/cast	<600	400	400	480	1.6	2
3.1-3.3	COPPER alloyed	<600	200	200	242	1.5	1.6
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000		40	62	0.8	0.5
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	HRSA	<1450					
ADVICE The values marked in turquoise are side applications! All fz/α values in the table for material group 1.1, consider factors for the other groups! When helical and ramping use fz 50 % of the full slot. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material groups T and S, the use of cooling lubricant is recommended!							


D1 	L2 	Immersion Angle 	Full Slot 			Side Milling 			ETC 			
Ø	mm	α°	fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
4	8	0.5°	0.015	4	4	0.02	1.2	L2max	0.05	0.58	L2max	0.0352
5	9	0.5°	0.02	5	5	0.03	1.5	L2max	0.06	0.73	L2max	0.0424
6	13	0.8°	0.03	6	6	0.04	1.8	L2max	0.077	0.9	L2max	0.055
8	19	1°	0.04	8	8	0.055	2.4	L2max	0.094	1.2	L2max	0.0671
10	22	1.5°	0.06	10	10	0.08	3	L2max	0.11	1.45	L2max	0.0775
12	26	2°	0.065	12	12	0.09	3.6	L2max	0.128	1.8	L2max	0.0914
16	32	2.5°	0.07	16	16	0.095	4.8	L2max	0.144	2.3	L2max	0.101
20	41	3°	0.08	20	20	0.12	6	L2max	0.17	2.9	L2max	0.1197

Cooling	   
Tolerance	e8
Coating	BetaUni Iron




Strategy	ETC	HPC	UNI	
Application	   			
Features	HA	≠	   	

- Optimized chip chambers for a large chip volume
- Adapted roughing teeth for small chips

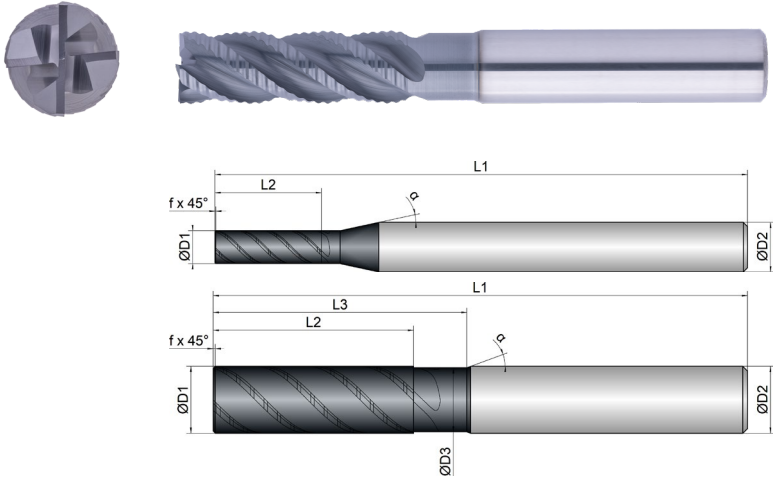- For roughing under HPC conditions



Roughing					Finishing				
									
inappropriate					inappropriate				
optimal					optimal				

BCU1-M02-0113	D1  mm ø	D3  mm ø	L2  mm	L3  mm	L1  mm	D2  mm ø	z  #	 mm	 °	α  °
4	4.0	0.0	13.0	0.0	65.0	6.0	4	0.10	45	12
5	5.0	0.0	16.0	0.0	65.0	6.0	4	0.20	45	12
6	6.0	5.6	18.0	24.0	65.0	6.0	4	0.20	45	20
8	8.0	7.6	24.0	30.0	70.0	8.0	4	0.20	45	20
10	10.0	9.6	30.0	38.0	80.0	10.0	4	0.32	45	20
12	12.0	11.4	36.0	46.0	93.0	12.0	4	0.32	45	20
16	16.0	15.4	48.0	58.0	110.0	16.0	4	0.32	45	20
20	20.0	19.4	60.0	74.0	126.0	20.0	4	0.50	45	20

 Download Catalog Pages (PDF)			Full Slot 	Side Milling 	ETC 	Materialgroup Factor fz / α	Materialgroup Factor αe ETC
Material	Strength (N/mm²)						
P	STEEL		Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850	175	175	285	1	
2.1-2.2	low alloyed	<950	165	165	202	0.9	
3.1-3.2	high alloyed	<1100	155	155	176	0.8	
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000	180	180	214	0.9	
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850	80	80	122	0.9	
2.1	austenitic	<650	70	70	104	0.8	
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/cast	<600	360	360	460	1.6	
3.1-3.3	COPPER alloyed	<600	180	180	222	1.5	
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000		35	52	0.8	
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	HRSA	<1450					
ADVICE The values marked in turquoise are side applications! All fz/α values in the table for material group 1.1, consider factors for the other groups! When helical and ramping use fz 50 % of the full slot. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material groups T and S, the use of cooling lubricant is recommended! For coarser roughing operations and ETC operations, we recommend a Weldon in conjunction with a Weldon chuck.							

Material P 1.1-1.3


D1  ø	L2  mm	Immersion Angle  α°	Full Slot			Side Milling			ETC			
			fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
4	13	0.5°	0.012	4	4	0.015	1.2	L2max	0.04	0.48	L2max	0.026
5	16	0.5°	0.015	5	5	0.022	1.5	L2max	0.05	0.63	L2max	0.0332
6	18	0.8°	0.022	6	6	0.032	1.8	L2max	0.067	0.8	L2max	0.0456
8	24	1°	0.032	8	8	0.048	2.4	L2max	0.084	1.1	L2max	0.0579
10	30	1.5°	0.05	10	10	0.07	3	L2max	0.1	1.25	L2max	0.0661
12	36	2°	0.055	12	12	0.08	3.6	L2max	0.118	1.6	L2max	0.0802
16	48	2.5°	0.06	16	16	0.085	4.8	L2max	0.134	2.1	L2max	0.0905
20	60	3°	0.07	20	20	0.1	6	L2max	0.16	2.6	L2max	0.1076





Cooling	   
Tolerance	e8
Coating	BetaUni Iron

Strategy	ETC	HPC	UNI	
Application	   			
Features	HB	≠	   	

- Optimized chip chambers for a large chip volume
- Adapted roughing teeth for small chips

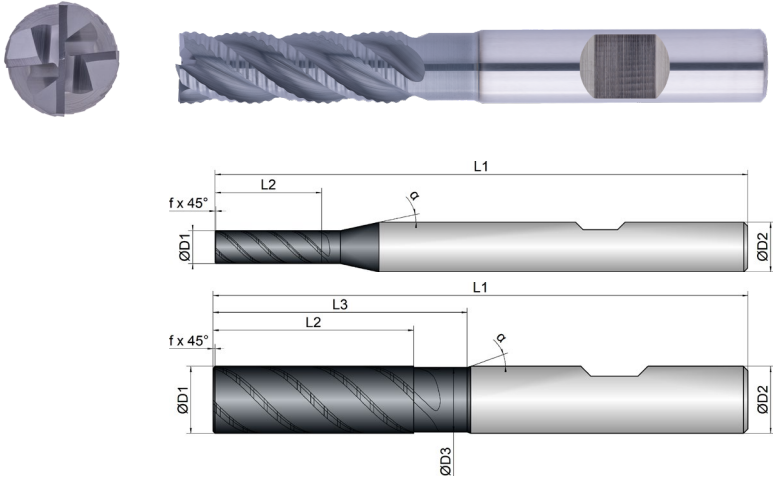- For roughing under HPC conditions



Roughing						Finishing				
										
BCU1-M02-0114	 mm Ø	 mm Ø	 mm	 mm	 mm	 mm Ø	 #	 mm	 °	 °
4	4.0	0.0	13.0	0.0	65.0	6.0	4	0.10	45	12
5	5.0	0.0	16.0	0.0	65.0	6.0	4	0.20	45	12
6	6.0	5.6	18.0	24.0	65.0	6.0	4	0.20	45	20
8	8.0	7.6	24.0	30.0	70.0	8.0	4	0.20	45	20
10	10.0	9.6	30.0	38.0	80.0	10.0	4	0.32	45	20
12	12.0	11.4	36.0	46.0	93.0	12.0	4	0.32	45	20
16	16.0	15.4	48.0	58.0	110.0	16.0	4	0.32	45	20
20	20.0	19.4	60.0	74.0	126.0	20.0	4	0.50	45	20

			Full Slot	Side Milling	ETC	Materialgroup Factor fz / α	Materialgroup Factor ae ETC
P	Material	Strength (N/mm²)	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850	175	175	285	1	1
2.1-2.2	low alloyed	<950	165	165	202	0.9	0.8
3.1-3.2	high alloyed	<1100	155	155	176	0.8	0.7
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000	180	180	214	0.9	0.8
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850	80	80	122	0.9	0.7
2.1	austenitic	<650	70	70	104	0.8	0.5
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/cast	<600	360	360	460	1.6	2
3.1-3.3	COPPER alloyed	<600	180	180	222	1.5	1.6
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000		35	52	0.8	0.5
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	HRSA	<1450					
ADVICE The values marked in turquoise are side applications! All fz/α values in the table for material group 1.1, consider factors for the other groups! When helical and ramping use fz 50 % of the full slot. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material groups T and S, the use of cooling lubricant is recommended!							

Material P 1.1-1.3


D1	L2	Immersion Angle	Full Slot			Side Milling			ETC			
												
Ø	mm	α°	fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)
4	13	0.5°	0.012	4	4	0.015	1.2	L2max	0.04	0.48	L2max	0.026
5	16	0.5°	0.015	5	5	0.022	1.5	L2max	0.05	0.63	L2max	0.0332
6	18	0.8°	0.022	6	6	0.032	1.8	L2max	0.067	0.8	L2max	0.0456
8	24	1°	0.032	8	8	0.048	2.4	L2max	0.084	1.1	L2max	0.0579
10	30	1.5°	0.05	10	10	0.07	3	L2max	0.1	1.25	L2max	0.0661
12	36	2°	0.055	12	12	0.08	3.6	L2max	0.118	1.6	L2max	0.0802
16	48	2.5°	0.06	16	16	0.085	4.8	L2max	0.134	2.1	L2max	0.0905
20	60	3°	0.07	20	20	0.1	6	L2max	0.16	2.6	L2max	0.1076




Cooling	   
Tolerance	e8
Coating	BetaUni Iron

Strategy	ETC	UNI	 Basic	
Application	  			
Features	HA	≠	 	
		3,5xD	R	

- Unequal tooth pitch for smooth running
- Large chip chambers for good chip evacuation

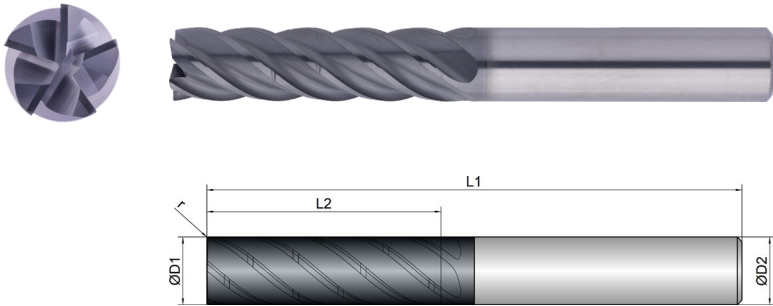- For roughing and finishing due to the adapted positioning of the chip breakers



Roughing				Finishing			
							
inappropriate				optimal			
BCU1-M03-0123	D1  mm Ø	L2  mm	L1  mm	D2  mm Ø	z  #	r  mm	 °
6	6.0	22.0	65.0	6.0	5	0.15	40
8	8.0	28.0	70.0	8.0	5	0.20	40
10	10.0	35.0	80.0	10.0	5	0.20	40
12	12.0	43.0	93.0	12.0	5	0.20	40
16	16.0	56.0	110.0	16.0	5	0.30	40

 Download Catalog Pages (PDF)			 ETC	 Finishing	 Materialgroup Factor fz	 Materialgroup Factor ae ETC
Material	Strength (N/mm ²)					
P	STEEL		Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850	274	230	1	1
2.1-2.2	low alloyed	<950	226	170	0.9	0.8
3.1-3.2	high alloyed	<1100	198	140	0.8	0.7
K	CASTINGS		Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000	234	190	0.9	0.8
M	STAINLESS STEEL		Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850	158	90	0.9	0.7
2.1	austenitic	<650	134	80	0.8	0.5
N	NON-FERROUS		Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/cast	<600	460	460	1.6	2
3.1-3.3	COPPER alloyed	<600	198	222	1.5	1.6
T	TITANIUM		Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000	80	50	0.8	0.5
S	SUPER ALLOYS		Vc = m/min	Vc = m/min		
1.1-1.3	HRSA	<1450				
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1, consider factors for the other groups! When helical, use fz 50 %. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material group T, the use of cooling lubricant is recommended! For coarser roughing operations and ETC operations, we recommend a Weldon in conjunction with a Weldon chuck.						


Material P 1.1-1.3

D1 	L2 	Immersion Angle 	ETC high dynamic 				ETC low dynamic 				Finishing 	
Ø	mm	α°	fz (mm/Z)	ae = 0.07xD (mm)	ap (mm)	hmax (mm)	fz (mm/Z)	ae = 0.15xD (mm)	ap (mm)	hmax (mm)	fz (mm/Z)	ae (mm)
6	22	0.8°	0.08	0.42	L2max	0.0408	0.066	0.9	L2max	0.0471	0.022	0.2
8	28	1°	0.095	0.56	L2max	0.0485	0.078	1.2	L2max	0.0557	0.028	0.2
10	35	1°	0.11	0.7	L2max	0.0561	0.090	1.5	L2max	0.0643	0.032	0.2
12	43	1.3°	0.125	0.84	L2max	0.0638	0.103	1.8	L2max	0.0736	0.034	0.2
16	56	1.3°	0.15	1.12	L2max	0.0765	0.123	2.4	L2max	0.0878	0.036	0.2

Cooling	   
Tolerance	e8
Coating	BetaUni Iron

Strategy	ETC	UNI	 Basic	
Application	  			
Features	HB	≠	 	  
		3,5xD	R	

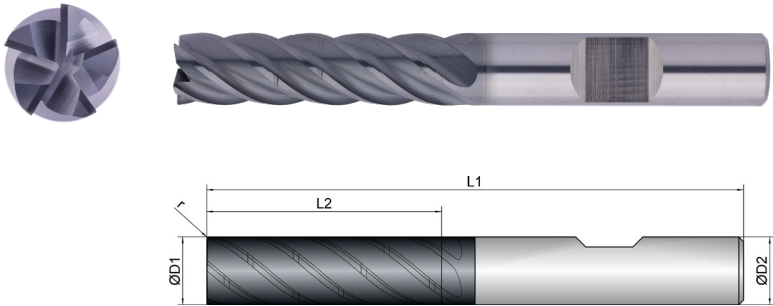- Unequal tooth pitch for smooth running
- Large chip chambers for good chip evacuation



Roughing				Finishing			
							
inappropriate				inappropriate			
				optimal			
BCU1-M03-0124	D1  mm ø	L2  mm	L1  mm	D2  mm ø	z  #	r  mm	 °
6	6.0	22.0	65.0	6.0	5	0.15	40
8	8.0	28.0	70.0	8.0	5	0.20	40
10	10.0	35.0	80.0	10.0	5	0.20	40
12	12.0	43.0	93.0	12.0	5	0.20	40
16	16.0	56.0	110.0	16.0	5	0.30	40

 Download Catalog Pages (PDF)			ETC	Finishing	Materialgroup Factor fz	Materialgroup Factor ae ETC
Material			Strength (N/mm²)	Vc = m/min	Vc = m/min	
P	STEEL			Vc = m/min	Vc = m/min	
1.1-1.3	unalloyed	<850	274	230	1	1
2.1-2.2	low alloyed	<950	226	170	0.9	0.8
3.1-3.2	high alloyed	<1100	198	140	0.8	0.7
K	CASTINGS			Vc = m/min	Vc = m/min	
1.1-1.2	grey cast iron	<1000	234	190	0.9	0.8
M	STAINLESS STEEL			Vc = m/min	Vc = m/min	
1.1	ferritic/martensitic	<850	158	90	0.9	0.7
2.1	austenitic	<650	134	80	0.8	0.5
N	NON-FERROUS			Vc = m/min	Vc = m/min	
1.1-2.3	ALUMINIUM alloyed/cast	<600	460	460	1.6	2
3.1-3.3	COPPER alloyed	<600	198	222	1.5	1.6
T	TITANIUM			Vc = m/min	Vc = m/min	
2.1-2.2	pure/alloyed	<1000	80	50	0.8	0.5
S	SUPER ALLOYS			Vc = m/min	Vc = m/min	
1.1-1.3	HRSA	<1450				
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1, consider factors for the other groups! When helical, use fz 50 %. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material group T, the use of cooling lubricant is recommended!						

Material P 1.1-1.3												
D1 	L2 	Immersion Angle 	ETC high dynamic 				ETC low dynamic 				Finishing 	
Ø	mm	α°	fz (mm/Z)	ae = 0.07xD (mm)	ap (mm)	hmax (mm)	fz (mm/Z)	ae = 0.15xD (mm)	ap (mm)	hmax (mm)	fz (mm/Z)	ae (mm)
6	22	0.8°	0.08	0.42	L2max	0.0408	0.066	0.9	L2max	0.0471	0.022	0.2
8	28	1°	0.095	0.56	L2max	0.0485	0.078	1.2	L2max	0.0557	0.028	0.2
10	35	1°	0.11	0.7	L2max	0.0561	0.090	1.5	L2max	0.0643	0.032	0.2
12	43	1.3°	0.125	0.84	L2max	0.0638	0.103	1.8	L2max	0.0736	0.034	0.2
16	56	1.3°	0.15	1.12	L2max	0.0765	0.123	2.4	L2max	0.0878	0.036	0.2

Cooling

Tolerance

e8

Coating

BetaUni Iron

Strategy

HPCUNI

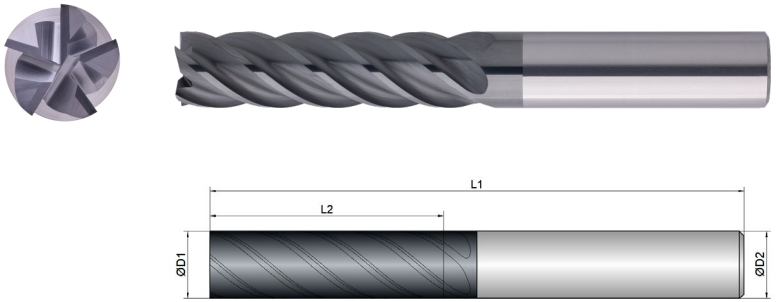
Application

Features

HA≠3.5xD90°

Basic

- 5 cutting edges for solid finishing surfaces in different materials
- Unequal tooth pitch for smooth running
- Groove profile for the removal of long chips



Roughing				Finishing		
inappropriateoptimal				inappropriateoptimal		
BCU1-M04-0123	D1 mm ø	L2 mm	L1 mm	D2 mm ø	z #	 °
6	6.0	22.0	65.0	6.0	5	40
8	8.0	28.0	70.0	8.0	5	40
10	10.0	35.0	80.0	10.0	5	40
12	12.0	43.0	93.0	12.0	5	40
16	16.0	56.0	110.0	16.0	5	40

Download Catalog Pages (PDF)

Material		Strength (N/mm²)	Finishing 	Materialgroup Factor fz / α
P STEEL			Vc = m/min	
1.1-1.3	unalloyed	<850	210	1
2.1-2.2	low alloyed	<950	190	0.9
3.1-3.2	high alloyed	<1100	180	0.9
K CASTINGS			Vc = m/min	
1.1-1.2	grey cast iron	<1000	190	0.9
M STAINLESS STEEL			Vc = m/min	
1.1	ferritic/martensitic	<850	85	0.9
2.1	austenitic	<650	72	0.9
N NON-FERROUS			Vc = m/min	
1.1-2.3	ALUMINIUM alloyed/cast	<600	290	1.1
3.1-3.3	COPPER alloyed	<600	145	1
T TITANIUM			Vc = m/min	
2.1-2.2	pure/alloyed	<1000	38	0.9
S SUPER ALLOYS			Vc = m/min	
1.1-1.3	HRSA	<1450	18	0.8

ADVICE | The values marked in turquoise are side applications!
All fz/α values in the table for material group 1.1 - 1.3, consider factors for the other groups!
The specified values represent starting values for finishing.
Depending on the material it may be necessary to change the Vc or Fz value.
For a very good straightness of the surface an additional blank path is recommended.

D1 Ø	L2 mm	Immersion Angle α°	Semi Finishing 			Finishing 		
			fz (mm/Z)	ae (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)
6	22		0.022	0.2	L2max	0.019	0.2	L2max
8	28		0.027	0.2	L2max	0.023	0.2	L2max
10	35		0.035	0.2	L2max	0.026	0.2	L2max
12	43		0.042	0.2	L2max	0.03	0.2	L2max
16	56		0.052	0.2	L2max	0.034	0.2	L2max

Cooling









Tolerance

e8

Coating

BetaUni Iron

Strategy

ETC

HSC

HPC

UNI

Application











Features

HA

≠

2xD



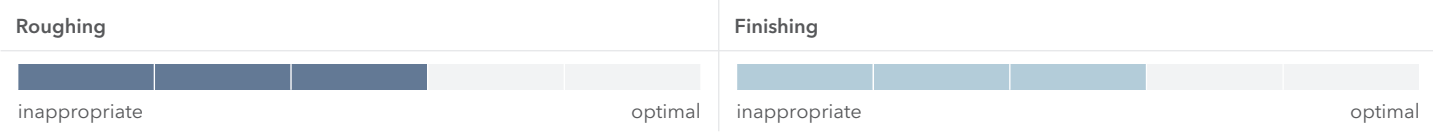
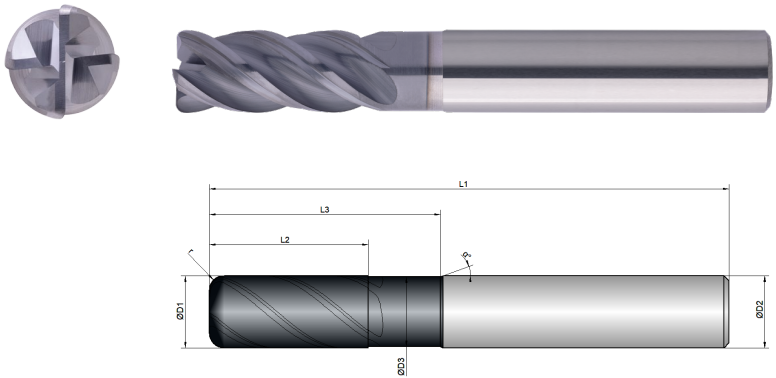











Basic



- Adapted clearance angle for reliable machining
 - Unequal tooth pitch for smooth running
 - Large chip chambers for good chip evacuation
- With big corner radius for 3D contours



BCU1-M06-0123	D1  mm ø	D3  mm ø	L2  mm	L3  mm	L1  mm	D2  mm ø	z  #	r  mm	 °	α  °
6/0,5	6.0	5.8	13.0	20.0	57.0	6.0	4	0.50	40	20
6/1	6.0	5.8	13.0	20.0	57.0	6.0	4	1.00	40	20
6/1,5	6.0	5.8	13.0	20.0	57.0	6.0	4	1.50	40	20
8/0,5	8.0	7.7	19.0	25.0	63.0	8.0	4	0.50	40	20
8/1	8.0	7.7	19.0	25.0	63.0	8.0	4	1.00	40	20
8/2	8.0	7.7	19.0	25.0	63.0	8.0	4	2.00	40	20
8/3	8.0	7.7	19.0	25.0	63.0	8.0	4	3.00	40	20
10/0,5	10.0	9.7	22.0	32.0	72.0	10.0	4	0.50	40	20
10/1	10.0	9.7	22.0	32.0	72.0	10.0	4	1.00	40	20
10/2	10.0	9.7	22.0	32.0	72.0	10.0	4	2.00	40	20
10/3	10.0	9.7	22.0	32.0	72.0	10.0	4	3.00	40	20
12/0,5	12.0	11.6	26.0	38.0	83.0	12.0	4	0.50	40	20

BCU1-M06-0123	D1  mm ø	D3  mm ø	L2  mm	L3  mm	L1  mm	D2  mm ø	z  #	r  mm	 °	α  °
12/1	12.0	11.6	26.0	38.0	83.0	12.0	4	1.00	40	20
12/2	12.0	11.6	26.0	38.0	83.0	12.0	4	2.00	40	20
12/3	12.0	11.6	26.0	38.0	83.0	12.0	4	3.00	40	20
16/0,5	16.0	15.5	32.0	44.0	92.0	16.0	4	0.50	40	20
16/1	16.0	15.5	32.0	44.0	92.0	16.0	4	1.00	40	20
16/2	16.0	15.5	32.0	44.0	92.0	16.0	4	2.00	40	20
16/3	16.0	15.5	32.0	44.0	92.0	16.0	4	3.00	40	20
20/1	20.0	19.5	41.0	54.0	104.0	20.0	4	1.00	40	20
20/2	20.0	19.5	41.0	54.0	104.0	20.0	4	2.00	40	20
20/3	20.0	19.5	41.0	54.0	104.0	20.0	4	3.00	40	20
20/4	20.0	19.5	41.0	54.0	104.0	20.0	4	4.00	40	20



Download Catalog Pages (PDF)

		Strength (N/mm²)	Full Slot	Side Milling	Finishing / Multipass Milling	ETC	Materialgroup Factor fz / a	Materialgroup Factor ae ETC
	Material		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
P	STEEL							
1.1-1.3	unalloyed	<850	200	200	220	315	1	1
2.1-2.2	low alloyed	<950	190	190	210	232	0.9	0.8
3.1-3.2	high alloyed	<1100	170	170	190	198	0.8	0.7
K	CASTINGS							
1.1-1.2	grey cast iron	<1000	210	210	230	242	0.9	0.8
M	STAINLESS STEEL							
1.1	ferritic/martensitic	<850		90	95	152	0.9	0.7
2.1	austenitic	<650		80	85	132	0.8	0.5
N	NON-FERROUS							
1.1-2.3	ALUMINIUM alloyed/cast	<600	400	400	420	500	1.6	2
3.1-3.3	COPPER alloyed	<600	200	200	220	262	1.5	1.6
T	TITANIUM							
2.1-2.2	pure/alloyed	<1000		50	53	75	0.8	0.5
S	SUPER ALLOYS							
1.1-1.3	HRSA	<1450		25	28	42	0.7	0.3
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1, consider factors for the other groups! When helical, use fz 50 %. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material groups T and S, the use of cooling lubricant is recommended! For coarser roughing operations and ETC operations, we recommend a Weldon in conjunction with a Weldon chuck.								

Material P 1.1-1.3

D1 	L2 	ETC 				Multipass Milling 		
		fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)	fz (mm/Z)	ae = 0.04xD (mm)	ap = 0.04xD (mm)
Ø	mm							
6	13	0.09	1.6	L2max	0.0796	0.045	0.24	0.24
8	19	0.11	1.9	L2max	0.0936	0.06	0.32	0.32
10	22	0.13	2.3	L2max	0.1094	0.07	0.4	0.4
12	26	0.15	2.6	L2max	0.1236	0.085	0.48	0.48
16	32	0.17	3.3	L2max	0.1376	0.095	0.64	0.64
20	41	0.2	3.6	L2max	0.1537	0.11	0.8	0.8

Material P 1.1-1.3

D1 	L2 	Immersion Angle 	Full Slot 			Side Milling 			Finishing 		
			fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)
Ø	mm	α°									
6	13	0.8°	0.035	6	6	0.04	1.8	L2max	0.022	0.2	L2max
8	19	1°	0.045	8	8	0.055	2.4	L2max	0.028	0.2	L2max
10	22	1.5°	0.05	10	10	0.065	3	L2max	0.033	0.2	L2max
12	26	2°	0.055	12	12	0.075	3.6	L2max	0.035	0.2	L2max
16	32	2.5°	0.065	16	16	0.085	4.8	L2max	0.038	0.2	L2max
20	41	3°	0.085	20	20	0.1	6	L2max	0.04	0.2	L2max

STILL CAN'T FIND A SUITABLE MILLING CUTTER?

No problem – simply customize an existing tool. Using our configurator for special milling cutters, you can customize existing tools to your needs in an instant or create your own tools based on predefined types.

WE WILL RESPOND TO ALL REQUESTS SUBMITTED VIA THE CONFIGURATOR WITHIN ONE WORKING DAY AT THE LATEST



Cooling



Tolerance

e8

Coating

BetaUni Iron

Strategy

ETCHSCHPCUNI

Application



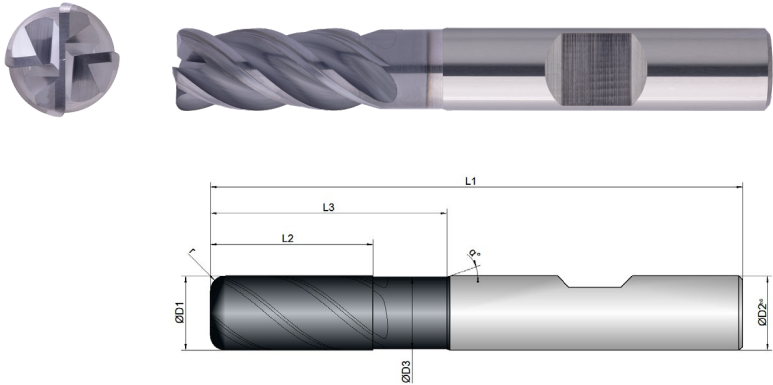
Features



HB≠2xD+R



Basic



- Adapted clearance angle for reliable machining
 - Unequal tooth pitch for smooth running
 - Large chip chambers for good chip evacuation
-
- With big corner radius for 3D contours



Roughing						Finishing				
inappropriateoptimal						inappropriateoptimal				
BCU1-M06-0124	D1  mm ø	D3  mm ø	L2  mm	L3  mm	L1  mm	D2  mm ø	z  #	r  mm	 °	α  °
6/0,5	6.0	5.8	13.0	20.0	57.0	6.0	4	0.50	40	20
6/1	6.0	5.8	13.0	20.0	57.0	6.0	4	1.00	40	20
6/1,5	6.0	5.8	13.0	20.0	57.0	6.0	4	1.50	40	20
8/0,5	8.0	7.7	19.0	25.0	63.0	8.0	4	0.50	40	20
8/1	8.0	7.7	19.0	25.0	63.0	8.0	4	1.00	40	20
8/2	8.0	7.7	19.0	25.0	63.0	8.0	4	2.00	40	20
8/3	8.0	7.7	19.0	25.0	63.0	8.0	4	3.00	40	20
10/0,5	10.0	9.7	22.0	32.0	72.0	10.0	4	0.50	40	20
10/1	10.0	9.7	22.0	32.0	72.0	10.0	4	1.00	40	20
10/2	10.0	9.7	22.0	32.0	72.0	10.0	4	2.00	40	20
10/3	10.0	9.7	22.0	32.0	72.0	10.0	4	3.00	40	20

BCU1-M06-0124	D1  mm ø	D3  mm ø	L2  mm	L3  mm	L1  mm	D2  mm ø	z  #	r  mm	 °	α  °
12/0,5	12.0	11.6	26.0	38.0	83.0	12.0	4	0.50	40	20
12/1	12.0	11.6	26.0	38.0	83.0	12.0	4	1.00	40	20
12/2	12.0	11.6	26.0	38.0	83.0	12.0	4	2.00	40	20
12/3	12.0	11.6	26.0	38.0	83.0	12.0	4	3.00	40	20
16/0,5	16.0	15.5	32.0	44.0	92.0	16.0	4	0.50	40	20
16/1	16.0	15.5	32.0	44.0	92.0	16.0	4	1.00	40	20
16/2	16.0	15.5	32.0	44.0	92.0	16.0	4	2.00	40	20
16/3	16.0	15.5	32.0	44.0	92.0	16.0	4	3.00	40	20
20/1	20.0	19.5	41.0	54.0	104.0	20.0	4	1.00	40	20
20/2	20.0	19.5	41.0	54.0	104.0	20.0	4	2.00	40	20
20/3	20.0	19.5	41.0	54.0	104.0	20.0	4	3.00	40	20
20/4	20.0	19.5	41.0	54.0	104.0	20.0	4	4.00	40	20



Download Catalog Pages (PDF)

		Strength (N/mm²)	Full Slot 	Side Milling 	Finishing / Multipass Milling 	ETC 	Materialgroup Factor fz / α	Materialgroup Factor ae ETC
P	STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850	200	200	220	315	1	1
2.1-2.2	low alloyed	<950	190	190	210	232	0.9	0.8
3.1-3.2	high alloyed	<1100	170	170	190	198	0.8	0.7
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000	210	210	230	242	0.9	0.8
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850		90	95	152	0.9	0.7
2.1	austenitic	<650		80	85	132	0.8	0.5
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/cast	<600	400	400	420	500	1.6	2
3.1-3.3	COPPER alloyed	<600	200	200	220	262	1.5	1.6
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000		50	53	75	0.8	0.5
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min	Vc = m/min		
1.1-1.3	HRSA	<1450		25	28	42	0.7	0.3
ADVICE The values marked in turquoise are side applications! All fz/α values in the table for material group 1.1, consider factors for the other groups! When helical, use fz 50 %. The specified values represent starting values for a solid clamping situation. To determine the hmax values, please use the provided formula. For material groups T and S, the use of cooling lubricant is recommended!								

Material P 1.1-1.3

D1 	L2 	ETC 				Multipass Milling 		
		fz (mm/Z)	ae (mm)	ap (mm)	hmax (mm)	fz (mm/Z)	ae = 0.04xD (mm)	ap = 0.04xD (mm)
6	13	0.09	1.6	L2max	0.0796	0.045	0.24	0.24
8	19	0.11	1.9	L2max	0.0936	0.06	0.32	0.32
10	22	0.13	2.3	L2max	0.1094	0.07	0.4	0.4
12	26	0.15	2.6	L2max	0.1236	0.085	0.48	0.48
16	32	0.17	3.3	L2max	0.1376	0.095	0.64	0.64
20	41	0.2	3.6	L2max	0.1537	0.11	0.8	0.8

Material P 1.1-1.3

D1 	L2 	Immersion Angle 	Full Slot 			Side Milling 			Finishing 		
			fz (mm/Z)	ae = 1xD (mm)	ap = 1xD (mm)	fz (mm/Z)	ae = 0.3xD (mm)	ap (mm)	fz (mm/Z)	ae (mm)	ap (mm)
6	13	0.8°	0.035	6	6	0.04	1.8	L2max	0.022	0.2	L2max
8	19	1°	0.045	8	8	0.055	2.4	L2max	0.028	0.2	L2max
10	22	1.5°	0.05	10	10	0.065	3	L2max	0.033	0.2	L2max
12	26	2°	0.055	12	12	0.075	3.6	L2max	0.035	0.2	L2max
16	32	2.5°	0.065	16	16	0.085	4.8	L2max	0.038	0.2	L2max
20	41	3°	0.085	20	20	0.1	6	L2max	0.04	0.2	L2max

DO YOU HAVE BLUNT MILLING CUTTERS
THAT URGENTLY NEED REGRINDING?



➔ DISCOVER OUR H&V REGRINDING SERVICE AND HAVE YOUR
TOOLS RECONDITIONED TO THEIR ORIGINAL STATE!



Cooling

Tolerance

f8

Coating

BetaUni Iron

Strategy

HSCUNI

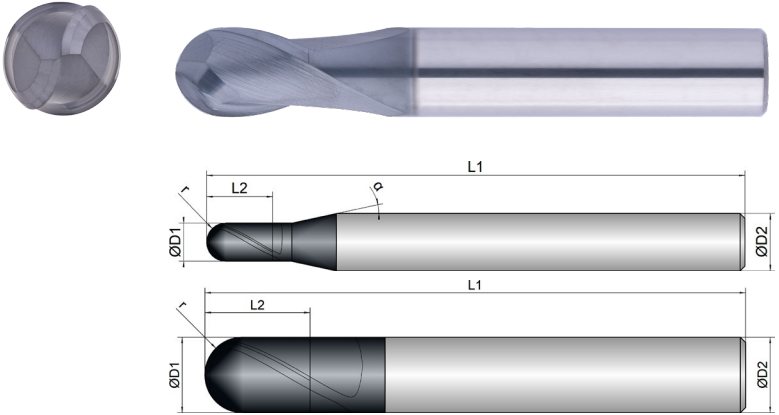
Application

Features

HA1xD(R)

Basic

- Geometry of the face cutting edge designed for a soft and even cut
- Adapted chip chambers for roughing and finishing
- Suitable for wet and dry machining
- Short version



Roughing				Finishing				
inappropriateoptimal				inappropriateoptimal				
BCU1-M08-0053	D1 mm Ø	L2 mm	L1 mm	D2 mm Ø	z #	r mm	 °	α °
0,5	0.5	1.5	57.0	6.0	2	0.25	30	12
1	1.0	2.0	57.0	6.0	2	0.50	30	12
1,5	1.5	3.0	57.0	6.0	2	0.75	30	12
2	2.0	4.0	57.0	6.0	2	1.00	30	12
2,5	2.5	5.0	57.0	6.0	2	1.25	30	12
3	3.0	6.0	57.0	6.0	2	1.50	30	12
4	4.0	7.0	57.0	6.0	2	2.00	30	12
5	5.0	8.0	57.0	6.0	2	2.50	30	12
6	6.0	10.0	57.0	6.0	2	3.00	30	0
8	8.0	12.0	63.0	8.0	2	4.00	30	0
10	10.0	14.0	72.0	10.0	2	5.00	30	0
12	12.0	16.0	83.0	12.0	2	6.00	30	0

Download Catalog Pages (PDF)

		Strength (N/mm²)	Roughing	Semi Finishing	Finishing	Materialgroup Factor fz
P	STEEL		Vc = m/min	Vc = m/min	Vc = m/min	
1.1-1.3	unalloyed	<850	260	280	290	1
2.1-2.2	low alloyed	<950	210	230	240	0.9
3.1-3.2	high alloyed	<1100	200	220	230	0.8
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min	
1.1-1.2	grey cast iron	<1000	270	290	300	0.9
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min	
1.1	ferritic/martensitic	<850	90	95	100	1
2.1	austenitic	<650	75	80	85	0.9
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min	
1.1-2.3	ALUMINIUM alloyed/cast	<600	470	490	500	1.6
3.1-3.3	COPPER alloyed	<600	190	210	220	1.5
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min	
2.1-2.2	pure/alloyed	<1000	40	45	50	0.8
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min	
1.1-1.3	HRSA	<1450	30	35	40	0.7
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1, consider factors for the other groups! The specified values represent starting values. Depending on the material, it may be necessary to change the Vc or Fz value.						

Material P 1.1-1.3

D1 Ø	Roughing			Semi Finishing			Finishing		
	fz (mm/Z)	ae 0.3xD (mm)	ap 0.3xD (mm)	fz (mm/Z)	ae 0.1xD (mm)	ap 0.1xD (mm)	fz (mm/Z)	ae 0.05xD (mm)	ap 0.05xD (mm)
0.5	0.007	0.15	0.15	0.012	0.05	0.05	0.01	0.025	0.025
1	0.013	0.3	0.3	0.023	0.1	0.1	0.02	0.05	0.05
1.5	0.020	0.45	0.45	0.035	0.15	0.15	0.03	0.075	0.075
2	0.026	0.6	0.6	0.046	0.2	0.2	0.04	0.1	0.1
2.5	0.029	0.75	0.75	0.052	0.25	0.25	0.045	0.125	0.125
3	0.033	0.9	0.9	0.058	0.3	0.3	0.05	0.15	0.15
4	0.039	1.2	1.2	0.069	0.4	0.4	0.06	0.2	0.2
5	0.046	1.5	1.5	0.081	0.5	0.5	0.07	0.25	0.25
6	0.055	1.8	1.8	0.098	0.6	0.6	0.085	0.3	0.3
8	0.078	2.4	2.4	0.138	0.8	0.8	0.12	0.4	0.4
10	0.085	3	3	0.150	1	1	0.13	0.5	0.5
12	0.091	3.6	3.6	0.161	1.2	1.2	0.14	0.6	0.6


Cooling	   
Tolerance	f8
Coating	BetaUni Iron

Strategy	HSC	UNI			 Basic
Application					
Features	HA		1xD		

- Geometry of the face cutting edge designed for a soft and even cut
- Adapted chip chambers for roughing and finishing

- Suitable for wet and dry machining

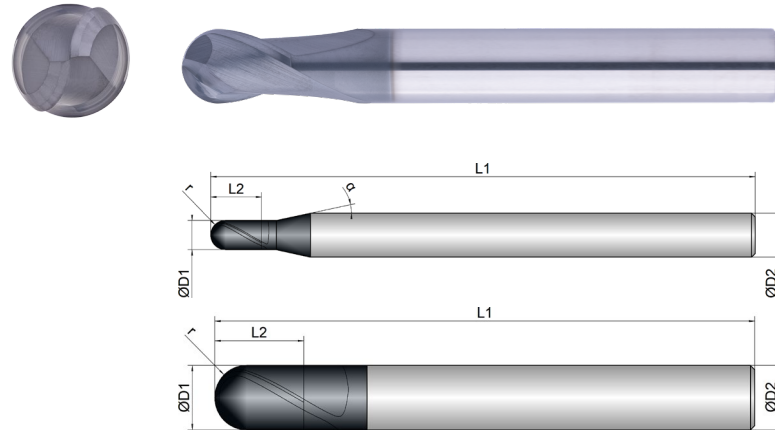- Long version



Roughing				Finishing				
inappropriateoptimal				inappropriateoptimal				
BCU1-M08-0063	D1	L2	L1	D2	z	r		α
								
	mm ø	mm	mm	mm ø	#	mm	°	°
	0,5	1.5	75.0	6.0	2	0.25	30	12
	1	2.0	75.0	6.0	2	0.50	30	12
	1,5	3.0	75.0	6.0	2	0.75	30	12
	2	4.0	75.0	6.0	2	1.00	30	12
	2,5	5.0	75.0	6.0	2	1.25	30	12
	3	6.0	75.0	6.0	2	1.50	30	12
	4	7.0	75.0	6.0	2	2.00	30	12
	5	8.0	75.0	6.0	2	2.50	30	12
	6	10.0	75.0	6.0	2	3.00	30	0
	8	12.0	75.0	8.0	2	4.00	30	0
10	14.0	85.0	10.0	2	5.00	30	0	
12	16.0	100.0	12.0	2	6.00	30	0	



Download Catalog
Pages (PDF)

 Download Catalog Pages (PDF)			Roughing 	Semi Finishing 	Finishing 	Materialgroup Factor fz
	Material	Strength (N/mm²)				
P	STEEL		Vc = m/min	Vc = m/min	Vc = m/min	
1.1-1.3	unalloyed	<850	240	260	270	1
2.1-2.2	low alloyed	<950	190	210	220	0.9
3.1-3.2	high alloyed	<1100	180	200	210	0.8
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min	
1.1-1.2	grey cast iron	<1000	250	270	280	0.9
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min	
1.1	ferritic/martensitic	<850	80	85	90	1
2.1	austenitic	<650	65	70	75	0.9
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min	
1.1-2.3	ALUMINIUM alloyed/cast	<600	440	460	470	1.6
3.1-3.3	COPPER alloyed	<600	170	190	200	1.5
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min	
2.1-2.2	pure/alloyed	<1000	40	42	45	0.8
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min	
1.1-1.3	HRSA	<1450	30	33	35	0.7
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1, consider factors for the other groups! The specified values represent starting values. Depending on the material, it may be necessary to change the Vc or Fz value.						

Material P 1.1-1.3

D1 	Roughing			Semi Finishing			Finishing		
	fz (mm/Z)	ae 0.3xD (mm)	ap 0.3xD (mm)	fz (mm/Z)	ae 0.1xD (mm)	ap 0.1xD (mm)	fz (mm/Z)	ae 0.05xD (mm)	ap 0.05xD (mm)
0.5	0.007	0.15	0.15	0.012	0.05	0.05	0.01	0.025	0.025
1	0.013	0.3	0.3	0.023	0.1	0.1	0.02	0.05	0.05
1.5	0.020	0.45	0.45	0.035	0.15	0.15	0.03	0.075	0.075
2	0.026	0.6	0.6	0.046	0.2	0.2	0.04	0.1	0.1
2.5	0.029	0.75	0.75	0.052	0.25	0.25	0.045	0.125	0.125
3	0.033	0.9	0.9	0.058	0.3	0.3	0.05	0.15	0.15
4	0.039	1.2	1.2	0.069	0.4	0.4	0.06	0.2	0.2
5	0.046	1.5	1.5	0.081	0.5	0.5	0.07	0.25	0.25
6	0.055	1.8	1.8	0.098	0.6	0.6	0.085	0.3	0.3
8	0.078	2.4	2.4	0.138	0.8	0.8	0.12	0.4	0.4
10	0.085	3	3	0.150	1	1	0.13	0.5	0.5
12	0.091	3.6	3.6	0.161	1.2	1.2	0.14	0.6	0.6

Cooling

Tolerance

f8

Coating

BetaUni Iron

Strategy

HSCUNI

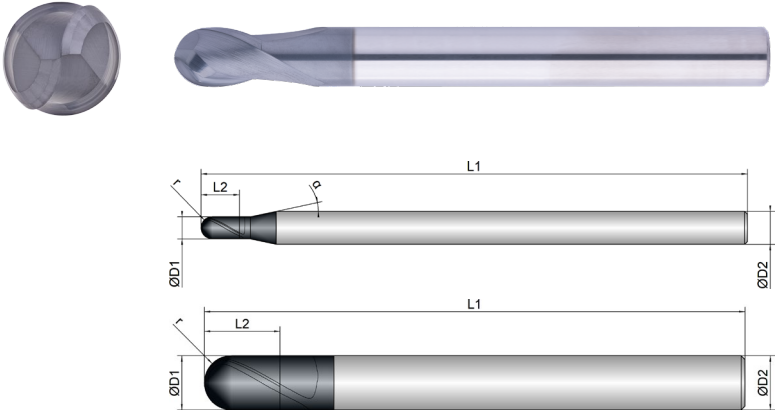
Application

Features

HA1xD(R)

Basic

- Geometry of the face cutting edge designed for a soft and even cut
 - Adapted chip chambers for roughing and finishing
- Suitable for wet and dry machining
- Overlong version



Roughing				Finishing				
inappropriateoptimal				inappropriateoptimal				
BCU1-M08-0073	D1 mm Ø	L2 mm	L1 mm	D2 mm Ø	z #	r mm	 °	α °
1	1.0	2.0	100.0	6.0	2	0.50	30	12
1,5	1.5	3.0	100.0	6.0	2	0.75	30	12
2	2.0	4.0	100.0	6.0	2	1.00	30	12
2,5	2.5	5.0	100.0	6.0	2	1.25	30	12
3	3.0	6.0	100.0	6.0	2	1.50	30	12
4	4.0	7.0	100.0	6.0	2	2.00	30	12
5	5.0	8.0	100.0	6.0	2	2.50	30	12
6	6.0	10.0	100.0	6.0	2	3.00	30	0
8	8.0	12.0	100.0	8.0	2	4.00	30	0
10	10.0	14.0	100.0	10.0	2	5.00	30	0
12	12.0	16.0	120.0	12.0	2	6.00	30	0

Download Catalog Pages (PDF)

	Material	Strength (N/mm²)	Roughing 	Semi Finishing 	Finishing 	Materialgroup Factor fz
P	STEEL		Vc = m/min	Vc = m/min	Vc = m/min	
1.1-1.3	unalloyed	<850	210	230	240	1
2.1-2.2	low alloyed	<950	170	190	200	0.9
3.1-3.2	high alloyed	<1100	165	185	195	0.8
K	CASTINGS		Vc = m/min	Vc = m/min	Vc = m/min	
1.1-1.2	grey cast iron	<1000	230	250	260	0.9
M	STAINLESS STEEL		Vc = m/min	Vc = m/min	Vc = m/min	
1.1	ferritic/martensitic	<850	75	80	85	1
2.1	austenitic	<650	60	65	70	0.9
N	NON-FERROUS		Vc = m/min	Vc = m/min	Vc = m/min	
1.1-2.3	ALUMINIUM alloyed/cast	<600	410	430	440	1.6
3.1-3.3	COPPER alloyed	<600	150	170	180	1.5
T	TITANIUM		Vc = m/min	Vc = m/min	Vc = m/min	
2.1-2.2	pure/alloyed	<1000	30	35	40	0.8
S	SUPER ALLOYS		Vc = m/min	Vc = m/min	Vc = m/min	
1.1-1.3	HRSA	<1450	25	28	30	0.7
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1, consider factors for the other groups! The specified values represent starting values. Depending on the material, it may be necessary to change the Vc or Fz value.						

Material P 1.1-1.3

D1 Ø	Roughing 			Semi Finishing 			Finishing 		
	fz (mm/Z)	ae 0.3xD (mm)	ap 0.3xD (mm)	fz (mm/Z)	ae 0.1xD (mm)	ap 0.1xD (mm)	fz (mm/Z)	ae 0.05xD (mm)	ap 0.05xD (mm)
1	0.013	0.3	0.3	0.023	0.1	0.1	0.02	0.05	0.05
1.5	0.020	0.45	0.45	0.035	0.15	0.15	0.03	0.075	0.075
2	0.026	0.6	0.6	0.046	0.2	0.2	0.04	0.1	0.1
2.5	0.029	0.75	0.75	0.052	0.25	0.25	0.045	0.125	0.125
3	0.033	0.9	0.9	0.058	0.3	0.3	0.05	0.15	0.15
4	0.039	1.2	1.2	0.069	0.4	0.4	0.06	0.2	0.2
5	0.046	1.5	1.5	0.081	0.5	0.5	0.07	0.25	0.25
6	0.055	1.8	1.8	0.098	0.6	0.6	0.085	0.3	0.3
8	0.078	2.4	2.4	0.138	0.8	0.8	0.12	0.4	0.4
10	0.085	3	3	0.150	1	1	0.13	0.5	0.5
12	0.091	3.6	3.6	0.161	1.2	1.2	0.14	0.6	0.6

Cooling

Tolerance

a9

Coating

BetaUni Iron

Strategy

UNI

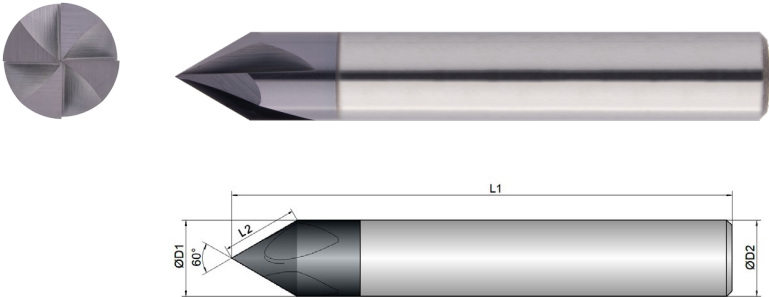
Application

Features

HA

Basic

For universal chamfering of work pieces



Roughing				Finishing		
inappropriateoptimal				inappropriateoptimal		
BCU1-M09-0103	D1 mm ø	L2 mm	L1 mm	D2 mm ø	z #	α °
1	1.0	0.9	50.0	3.0	3	8
2	2.0	1.9	50.0	3.0	3	8
3	3.0	2.9	50.0	3.0	3	
4	4.0	3.9	50.0	4.0	4	
6	6.0	5.9	50.0	6.0	4	
8	8.0	7.9	58.0	8.0	4	
10	10.0	9.9	66.0	10.0	4	
12	12.0	11.9	73.0	12.0	4	
16	16.0	15.8	82.0	16.0	4	



Download Catalog Pages (PDF)

Dimension	Ø1	Ø2	Ø3	Ø4	Ø6	Ø8	Ø10	Ø12	Ø16			
Infeed in mm	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max			
Application												
Material	Strength (N/mm²)	Feed (mm/Z)	fz	fz	fz	fz	fz	fz	fz	fz		
P STEEL		Vc (m/min)										
1.1-1.3	unalloyed	<850	110	0.012	0.014	0.018	0.024	0.035	0.045	0.055	0.065	0.09
2.1-2.2	low-alloyed	<950	100	0.01	0.012	0.015	0.02	0.03	0.04	0.05	0.06	0.08
3.1-3.2	high-alloyed	<1100	70	0.008	0.01	0.012	0.016	0.025	0.035	0.045	0.055	0.07
K CASTINGS		Vc (m/min)										
1.1-1.2	grey cast iron	<1000	95	0.01	0.012	0.015	0.02	0.03	0.04	0.05	0.06	0.08
M STAINLESS STEEL		Vc (m/min)										
1.1	ferritic/martensitic	<850	75	0.008	0.01	0.011	0.015	0.023	0.032	0.042	0.05	0.065
2.1	austenitic	<650	55	0.006	0.009	0.01	0.014	0.021	0.03	0.04	0.048	0.062
N NON-FERROUS		Vc (m/min)										
1.1-2.3	ALUMINIUM alloyed/cast	<600	280	0.015	0.022	0.025	0.03	0.04	0.05	0.06	0.07	0.1
3.1-3.3	COPPER alloyed	<600	150	0.01	0.012	0.015	0.02	0.03	0.04	0.05	0.06	0.08
T TITANIUM		Vc (m/min)										
2.1-2.2	pure/alloyed	<1000	40	0.008	0.009	0.01	0.014	0.021	0.03	0.04	0.048	0.062
S SUPER ALLOYS		Vc (m/min)										
1.1-1.3	HRSA	<1450	30	0.006	0.007	0.008	0.012	0.018	0.026	0.035	0.042	0.055
ADVICE The values marked in turquoise are side applications!												

Cooling

Tolerance

a9

Coating

BetaUni Iron

Strategy

UNI

Application

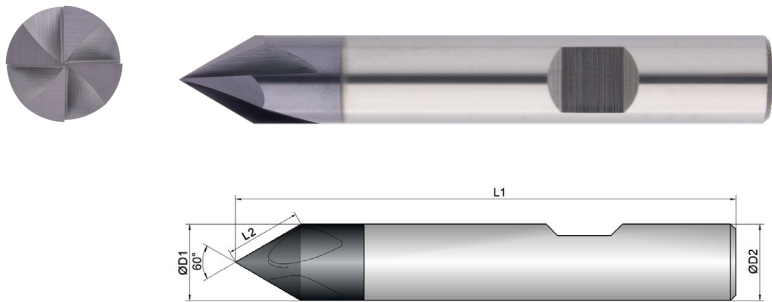
Features

HB

60°

Basic

■ For universal chamfering of work pieces



Roughing					Finishing				
inappropriate					inappropriate				
BCU1-M09-0104	D1	L2	L1	D2	z				
	mm ø	mm	mm	mm ø	#				
	6	5.9	50.0	6.0	4				
	8	7.9	58.0	8.0	4				
10	10.0	9.9	66.0	10.0	4				
12	12.0	11.9	73.0	12.0	4				
16	16.0	15.8	82.0	16.0	4				

Download Catalog Pages (PDF)

Dimension	Ø6	Ø8	Ø10	Ø12	Ø16
Infeed in mm	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max
Application					

Material	Strength (N/mm²)	Feed (mm/Z)	fz	fz	fz	fz	fz
P STEEL		Vc (m/min)					
1.1-1.3	unalloyed	<850	110	0.035	0.045	0.055	0.065
2.1-2.2	low-alloyed	<950	100	0.03	0.04	0.05	0.06
3.1-3.2	high-alloyed	<1100	70	0.025	0.035	0.045	0.055
K CASTINGS		Vc (m/min)					
1.1-1.2	grey cast iron	<1000	95	0.03	0.04	0.05	0.06
M STAINLESS STEEL		Vc (m/min)					
1.1	ferritic/martensitic	<850	75	0.023	0.032	0.042	0.05
2.1	austenitic	<650	55	0.021	0.03	0.04	0.048
N NON-FERROUS		Vc (m/min)					
1.1-2.3	ALUMINIUM alloyed/cast	<600	280	0.04	0.05	0.06	0.07
3.1-3.3	COPPER alloyed	<600	150	0.03	0.04	0.05	0.06
T TITANIUM		Vc (m/min)					
2.1-2.2	pure/alloyed	<1000	40	0.021	0.03	0.04	0.048
S SUPER ALLOYS		Vc (m/min)					
1.1-1.3	HRSA	<1450	30	0.018	0.026	0.035	0.042

ADVICE | The values marked in turquoise are side applications!

STILL CAN'T FIND A SUITABLE MILLING CUTTER?

No problem – simply customize an existing tool. Using our configurator for special milling cutters, you can customize existing tools to your needs in an instant or create your own tools based on predefined types.

WE WILL RESPOND TO ALL REQUESTS SUBMITTED VIA THE CONFIGURATOR WITHIN ONE WORKING DAY AT THE LATEST



Cooling

Tolerance

a9

Coating

BetaUni Iron

Strategy

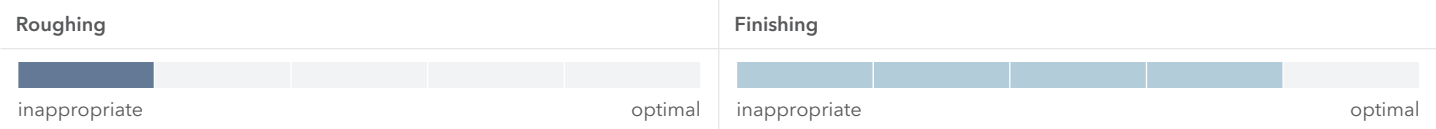
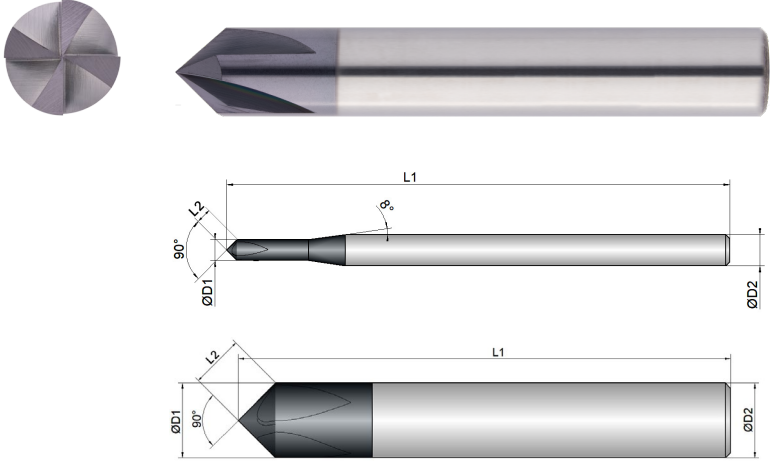
UNI

Application

Features

HA

■ For universal chamfering of work pieces



	D1	L2	L1	D2	z	α
BCU1-M09-0153						
1	1.0	0.7	50.0	3.0	3	8
2	2.0	1.4	50.0	3.0	3	8
3	3.0	2.1	50.0	3.0	3	
4	4.0	2.8	50.0	4.0	4	
6	6.0	4.2	50.0	6.0	4	
8	8.0	5.6	58.0	8.0	4	
10	10.0	7.0	66.0	10.0	4	
12	12.0	8.5	73.0	12.0	4	
16	16.0	11.2	82.0	16.0	4	



Download Catalog Pages (PDF)

			Dimension	Ø1	Ø2	Ø3	Ø4	Ø6	Ø8	Ø10	Ø12	Ø16
			Infeed in mm	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max
			Application									
Material	Strength (N/mm²)	Feed (mm/Z)	fz	fz	fz	fz	fz	fz	fz	fz	fz	fz
P	STEEL	Vc (m/min)										
1.1-1.3	unalloyed	<850	110	0.012	0.014	0.018	0.024	0.035	0.045	0.055	0.065	0.09
2.1-2.2	low-alloyed	<950	100	0.01	0.012	0.015	0.02	0.03	0.04	0.05	0.06	0.08
3.1-3.2	high-alloyed	<1100	70	0.008	0.01	0.012	0.016	0.025	0.035	0.045	0.055	0.07
K	CASTINGS	Vc (m/min)										
1.1-1.2	grey cast iron	<1000	95	0.01	0.012	0.015	0.02	0.03	0.04	0.05	0.06	0.08
M	STAINLESS STEEL	Vc (m/min)										
1.1	ferritic/martensitic	<850	75	0.008	0.01	0.011	0.015	0.023	0.032	0.042	0.05	0.065
2.1	austenitic	<650	55	0.006	0.009	0.01	0.014	0.021	0.03	0.04	0.048	0.062
N	NON-FERROUS	Vc (m/min)										
1.1-2.3	ALUMINIUM alloyed/cast	<600	280	0.015	0.022	0.025	0.03	0.04	0.05	0.06	0.07	0.1
3.1-3.3	COPPER alloyed	<600	150	0.01	0.012	0.015	0.02	0.03	0.04	0.05	0.06	0.08
T	TITANIUM	Vc (m/min)										
2.1-2.2	pure/alloyed	<1000	40	0.008	0.009	0.01	0.014	0.021	0.03	0.04	0.048	0.062
S	SUPER ALLOYS	Vc (m/min)										
1.1-1.3	HRSA	<1450	30	0.006	0.007	0.008	0.012	0.018	0.026	0.035	0.042	0.055
ADVICE The values marked in turquoise are side applications!												

Cooling

Tolerance

a9

Coating

BetaUni Iron

Strategy

UNI

Application

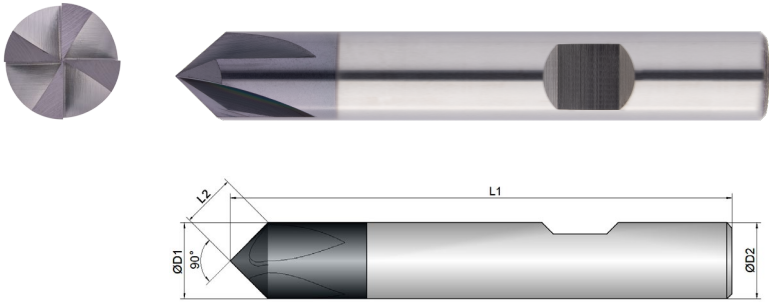
Features

HB

90°

Basic

■ For universal chamfering of work pieces



Roughing			Finishing		
inappropriateoptimal			inappropriateoptimal		
BCU1-M09-0154	D1 mm ø	L2 mm	L1 mm	D2 mm ø	z #
6	6.0	4.2	50.0	6.0	4
8	8.0	5.6	58.0	8.0	4
10	10.0	7.0	66.0	10.0	4
12	12.0	8.5	73.0	12.0	4
16	16.0	11.2	82.0	16.0	4



Download Catalog Pages (PDF)

			Dimension	Ø 6	Ø 8	Ø 10	Ø 12	Ø 16
			Infeed in mm	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max
			Application					
	Material	Strength (N/mm²)	Feed (mm/Z)	fz	fz	fz	fz	fz
P	STEEL		Vc (m/min)					
1.1-1.3	unalloyed	<850	110	0.035	0.045	0.055	0.065	0.09
2.1-2.2	low-alloyed	<950	100	0.03	0.04	0.05	0.06	0.08
3.1-3.2	high-alloyed	<1100	70	0.025	0.035	0.045	0.055	0.07
K	CASTINGS		Vc (m/min)					
1.1-1.2	grey cast iron	<1000	95	0.03	0.04	0.05	0.06	0.08
M	STAINLESS STEEL		Vc (m/min)					
1.1	ferritic/martensitic	<850	75	0.023	0.032	0.042	0.05	0.065
2.1	austenitic	<650	55	0.021	0.03	0.04	0.048	0.062
N	NON-FERROUS		Vc (m/min)					
1.1-2.3	ALUMINIUM alloyed/cast	<600	280	0.04	0.05	0.06	0.07	0.1
3.1-3.3	COPPER alloyed	<600	150	0.03	0.04	0.05	0.06	0.08
T	TITANIUM		Vc (m/min)					
2.1-2.2	pure/alloyed	<1000	40	0.021	0.03	0.04	0.048	0.062
S	SUPER ALLOYS		Vc (m/min)					
1.1-1.3	HRSA	<1450	30	0.018	0.026	0.035	0.042	0.055
ADVICE The values marked in turquoise are side applications!								

Cooling

Tolerance

a9

Coating

BetaUni Iron

Strategy

UNI

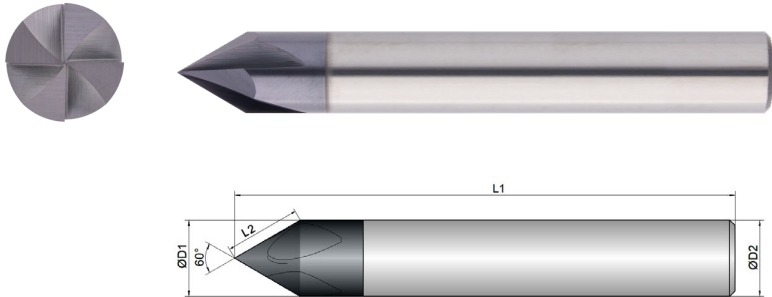
Application

Features

HA

Basic

■ For universal chamfering of work pieces



Roughing

inappropriateoptimal

Finishing

inappropriateoptimal

BCU1-M09-0203	D1 mm ø	L2 mm	L1 mm	D2 mm ø	z #
4	4.0	3.9	54.0	4.0	4
6	6.0	5.9	57.0	6.0	4
8	8.0	7.9	63.0	8.0	4
10	10.0	9.9	72.0	10.0	4
12	12.0	11.9	83.0	12.0	4
16	16.0	15.8	92.0	16.0	4

Download Catalog Pages (PDF)

Dimension	Ø1	Ø2	Ø3	Ø4	Ø6	Ø8	Ø10	Ø12	Ø16			
Infeed in mm	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max			
Application												
Material	Strength (N/mm²)											
P	STEEL	Vc (m/min)										
1.1-1.3	unalloyed	<850	110	fz 0.012	fz 0.014	fz 0.018	fz 0.024	fz 0.035	fz 0.045	fz 0.055	fz 0.065	fz 0.09
2.1-2.2	low-alloyed	<950	100	fz 0.01	fz 0.012	fz 0.015	fz 0.02	fz 0.03	fz 0.04	fz 0.05	fz 0.06	fz 0.08
3.1-3.2	high-alloyed	<1100	70	fz 0.008	fz 0.01	fz 0.012	fz 0.016	fz 0.025	fz 0.035	fz 0.045	fz 0.055	fz 0.07
K	CASTINGS	Vc (m/min)										
1.1-1.2	grey cast iron	<1000	95	fz 0.01	fz 0.012	fz 0.015	fz 0.02	fz 0.03	fz 0.04	fz 0.05	fz 0.06	fz 0.08
M	STAINLESS STEEL	Vc (m/min)										
1.1	ferritic/martensitic	<850	75	fz 0.008	fz 0.01	fz 0.011	fz 0.015	fz 0.023	fz 0.032	fz 0.042	fz 0.05	fz 0.065
2.1	austenitic	<650	55	fz 0.006	fz 0.009	fz 0.01	fz 0.014	fz 0.021	fz 0.03	fz 0.04	fz 0.048	fz 0.062
N	NON-FERROUS	Vc (m/min)										
1.1-2.3	ALUMINIUM alloyed/cast	<600	280	fz 0.015	fz 0.022	fz 0.025	fz 0.03	fz 0.04	fz 0.05	fz 0.06	fz 0.07	fz 0.1
3.1-3.3	COPPER alloyed	<600	150	fz 0.01	fz 0.012	fz 0.015	fz 0.02	fz 0.03	fz 0.04	fz 0.05	fz 0.06	fz 0.08
T	TITANIUM	Vc (m/min)										
2.1-2.2	pure/alloyed	<1000	40	fz 0.008	fz 0.009	fz 0.01	fz 0.014	fz 0.021	fz 0.03	fz 0.04	fz 0.048	fz 0.062
S	SUPER ALLOYS	Vc (m/min)										
1.1-1.3	HRSA	<1450	30	fz 0.006	fz 0.007	fz 0.008	fz 0.012	fz 0.018	fz 0.026	fz 0.035	fz 0.042	fz 0.055
ADVICE The values marked in turquoise are side applications!												

Cooling

Tolerance

a9

Coating

BetaUni Iron

Strategy

UNI

Application

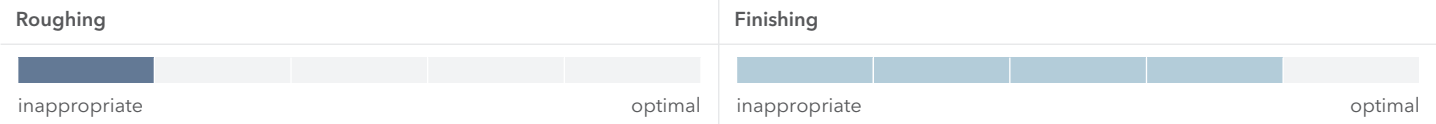
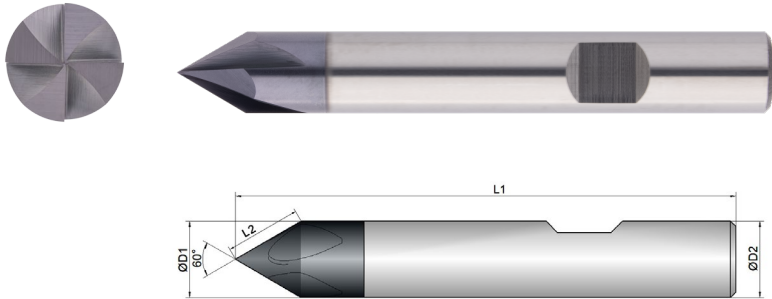
Features

HB

60°

Basic

■ For universal chamfering of work pieces



BCU1-M09-0204	D1 mm ø	L2 mm	L1 mm	D2 mm ø	z #
6	6.0	5.9	57.0	6.0	4
8	8.0	7.9	63.0	8.0	4
10	10.0	9.9	72.0	10.0	4
12	12.0	11.9	83.0	12.0	4
16	16.0	15.8	92.0	16.0	4



Download Catalog Pages (PDF)

			Dimension	Ø 6	Ø 8	Ø 10	Ø 12	Ø 16
			Infeed in mm	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max
			Application					
Material	Strength (N/mm²)	Feed (mm/Z)	fz	fz	fz	fz	fz	
P	STEEL	Vc (m/min)						
1.1-1.3	unalloyed	<850	110	0.035	0.045	0.055	0.065	0.09
2.1-2.2	low-alloyed	<950	100	0.03	0.04	0.05	0.06	0.08
3.1-3.2	high-alloyed	<1100	70	0.025	0.035	0.045	0.055	0.07
K	CASTINGS	Vc (m/min)						
1.1-1.2	grey cast iron	<1000	95	0.03	0.04	0.05	0.06	0.08
M	STAINLESS STEEL	Vc (m/min)						
1.1	ferritic/martensitic	<850	75	0.023	0.032	0.042	0.05	0.065
2.1	austenitic	<650	55	0.021	0.03	0.04	0.048	0.062
N	NON-FERROUS	Vc (m/min)						
1.1-2.3	ALUMINIUM alloyed/cast	<600	280	0.04	0.05	0.06	0.07	0.1
3.1-3.3	COPPER alloyed	<600	150	0.03	0.04	0.05	0.06	0.08
T	TITANIUM	Vc (m/min)						
2.1-2.2	pure/alloyed	<1000	40	0.021	0.03	0.04	0.048	0.062
S	SUPER ALLOYS	Vc (m/min)						
1.1-1.3	HRSA	<1450	30	0.018	0.026	0.035	0.042	0.055
ADVICE The values marked in turquoise are side applications!								

STILL CAN'T FIND A SUITABLE MILLING CUTTER?

No problem – simply customize an existing tool. Using our configurator for special milling cutters, you can customize existing tools to your needs in an instant or create your own tools based on predefined types.

WE WILL RESPOND TO ALL REQUESTS SUBMITTED VIA THE CONFIGURATOR WITHIN ONE WORKING DAY AT THE LATEST



Cooling

Tolerance

a9

Coating

BetaUni Iron

Strategy

UNI

Application

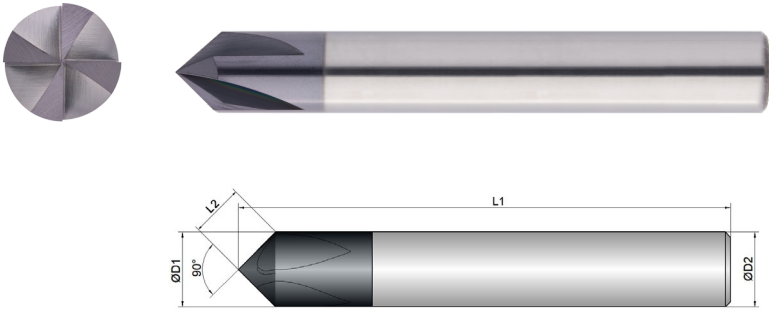
Features

HA

90°

Basic

■ For universal chamfering of work pieces



Roughing			Finishing		
inappropriateoptimal			inappropriateoptimal		
BCU1-M09-0253	D1 mm ø	L2 mm	L1 mm	D2 mm ø	z #
4	4.0	2.8	54.0	4.0	4
6	6.0	4.2	57.0	6.0	4
8	8.0	5.6	63.0	8.0	4
10	10.0	7.0	72.0	10.0	4
12	12.0	8.5	83.0	12.0	4
16	16.0	11.2	92.0	16.0	4

Download Catalog Pages (PDF)

Dimension	Ø1	Ø2	Ø3	Ø4	Ø6	Ø8	Ø10	Ø12	Ø16			
Infeed in mm	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max			
Application												
Material	Strength (N/mm²)	Feed (mm/Z)	fz	fz	fz	fz	fz	fz	fz			
P STEEL		Vc (m/min)										
1.1-1.3	unalloyed	<850	110	0.012	0.014	0.018	0.024	0.035	0.045	0.055	0.065	0.09
2.1-2.2	low-alloyed	<950	100	0.01	0.012	0.015	0.02	0.03	0.04	0.05	0.06	0.08
3.1-3.2	high-alloyed	<1100	70	0.008	0.01	0.012	0.016	0.025	0.035	0.045	0.055	0.07
K CASTINGS		Vc (m/min)										
1.1-1.2	grey cast iron	<1000	95	0.01	0.012	0.015	0.02	0.03	0.04	0.05	0.06	0.08
M STAINLESS STEEL		Vc (m/min)										
1.1	ferritic/martensitic	<850	75	0.008	0.01	0.011	0.015	0.023	0.032	0.042	0.05	0.065
2.1	austenitic	<650	55	0.006	0.009	0.01	0.014	0.021	0.03	0.04	0.048	0.062
N NON-FERROUS		Vc (m/min)										
1.1-2.3	ALUMINIUM alloyed/cast	<600	280	0.015	0.022	0.025	0.03	0.04	0.05	0.06	0.07	0.1
3.1-3.3	COPPER alloyed	<600	150	0.01	0.012	0.015	0.02	0.03	0.04	0.05	0.06	0.08
T TITANIUM		Vc (m/min)										
2.1-2.2	pure/alloyed	<1000	40	0.008	0.009	0.01	0.014	0.021	0.03	0.04	0.048	0.062
S SUPER ALLOYS		Vc (m/min)										
1.1-1.3	HRSA	<1450	30	0.006	0.007	0.008	0.012	0.018	0.026	0.035	0.042	0.055
ADVICE The values marked in turquoise are side applications!												

Cooling

Tolerance

a9

Coating

BetaUni Iron

Strategy

UNI

Application

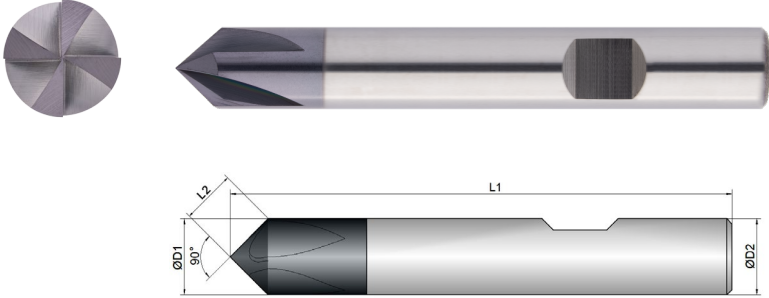
Features

HB

90°

Basic

■ For universal chamfering of work pieces



Roughing			Finishing		
inappropriateoptimal			inappropriateoptimal		
BCU1-M09-0254	D1 mm ø	L2 mm	L1 mm	D2 mm ø	z #
6	6.0	4.2	57.0	6.0	4
8	8.0	5.6	63.0	8.0	4
10	10.0	7.0	72.0	10.0	4
12	12.0	8.5	83.0	12.0	4
16	16.0	11.2	92.0	16.0	4



Download Catalog Pages (PDF)

			Dimension	Ø 6	Ø8	Ø10	Ø12	Ø16
		Strength (N/mm²)	Infeed in mm	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max	ae= 0.1xD ap= L2 max
			Application					
	Material		Feed (mm/Z)	fz	fz	fz	fz	fz
P	STEEL		Vc (m/min)					
1.1-1.3	unalloyed	<850	110	0.035	0.045	0.055	0.065	0.09
2.1-2.2	low-alloyed	<950	100	0.03	0.04	0.05	0.06	0.08
3.1-3.2	high-alloyed	<1100	70	0.025	0.035	0.045	0.055	0.07
K	CASTINGS		Vc (m/min)					
1.1-1.2	grey cast iron	<1000	95	0.03	0.04	0.05	0.06	0.08
M	STAINLESS STEEL		Vc (m/min)					
1.1	ferritic/martensitic	<850	75	0.023	0.032	0.042	0.05	0.065
2.1	austenitic	<650	55	0.021	0.03	0.04	0.048	0.062
N	NON-FERROUS		Vc (m/min)					
1.1-2.3	ALUMINIUM alloyed/cast	<600	280	0.04	0.05	0.06	0.07	0.1
3.1-3.3	COPPER alloyed	<600	150	0.03	0.04	0.05	0.06	0.08
T	TITANIUM		Vc (m/min)					
2.1-2.2	pure/alloyed	<1000	40	0.021	0.03	0.04	0.048	0.062
S	SUPER ALLOYS		Vc (m/min)					
1.1-1.3	HRSA	<1450	30	0.018	0.026	0.035	0.042	0.055
ADVICE The values marked in turquoise are side applications!								

Cooling

Tolerance

-

Coating

BetaUni Iron

Strategy

UNI

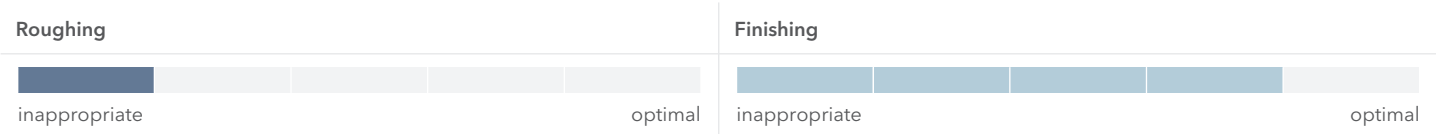
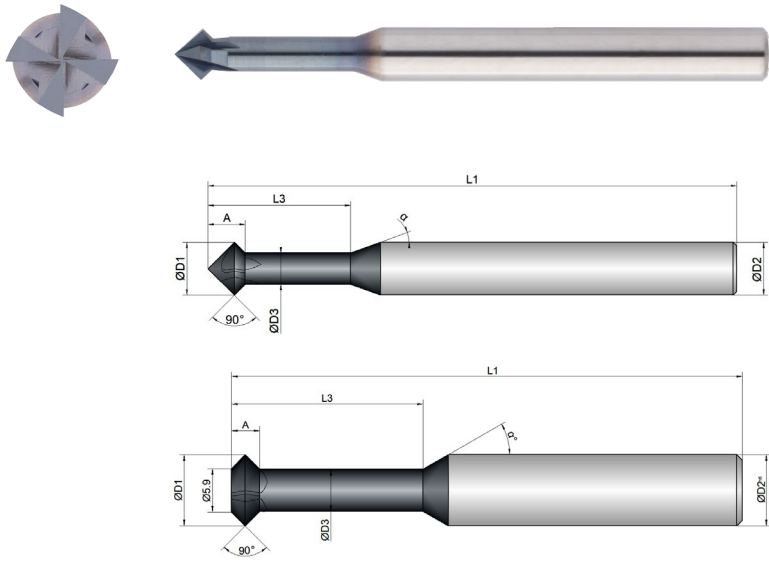
Application

Features

HA

Basic

- For universal chamfering of work pieces
- Forwards and backwards cutting



BCU1-M10-0023	D1 mm Ø	D3 mm Ø	A mm	L3 mm	L1 mm	D2 mm Ø	z #	α °
2	2.0	1.0	1.5	9.5	50.0	4.0	4	20
3	3.0	2.2	2.0	12.0	50.0	4.0	4	20
4	4.0	2.9	2.5	12.5	50.0	4.0	4	20
5	5.0	3.9	3.0	18.0	65.0	6.0	4	20
6	6.0	3.9	4.0	19.0	65.0	6.0	4	20
8	8.0	5.9	2.5	22.5	70.0	8.0	4	30
10	10.0	5.9	4.0	27.0	72.0	10.0	4	30
12	12.0	5.9	6.0	29.0	73.0	12.0	4	30



Download Catalog Pages (PDF)

			Dimension	Ø2	Ø3	Ø4	Ø5	Ø6	Ø8	Ø10	Ø12
			Infeed in mm	ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD
			Application								
	Material	Strength (N/mm²)	Feed (mm/Z)	fz	fz	fz	fz	fz	fz	fz	fz
P	STEEL		Vc (m/min)								
1.1-1.3	unalloyed	<850	75	0.012	0.015	0.018	0.02	0.025	0.03	0.035	0.04
2.1-2.2	low-alloyed	<950	55	0.01	0.012	0.016	0.018	0.023	0.028	0.033	0.038
3.1-3.2	high-alloyed	<1100	40	0.008	0.01	0.014	0.015	0.02	0.025	0.03	0.035
K	CASTINGS		Vc (m/min)								
1.1-1.2	grey cast iron	<1000	45	0.01	0.012	0.016	0.018	0.023	0.028	0.033	0.038
M	STAINLESS STEEL		Vc (m/min)								
1.1	ferritic/martensitic	<850	35	0.008	0.01	0.014	0.016	0.02	0.024	0.028	0.034
2.1	austenitic	<650	30	0.006	0.008	0.012	0.014	0.018	0.022	0.026	0.032
N	NON-FERROUS		Vc (m/min)								
1.1-2.3	ALUMINIUM alloyed/cast	<600	150	0.018	0.02	0.023	0.025	0.03	0.035	0.04	0.045
3.1-3.3	COPPER alloyed	<600	80	0.01	0.012	0.014	0.015	0.02	0.025	0.03	0.035
T	TITANIUM		Vc (m/min)								
2.1-2.2	pure/alloyed	<1000	30	0.006	0.008	0.012	0.014	0.018	0.022	0.026	0.032
S	SUPER ALLOYS		Vc (m/min)								
1.1-1.3	HRSA	<1450	20	0.005	0.007	0.01	0.012	0.016	0.02	0.024	0.03
ADVICE The values marked in turquoise are side applications!											

STILL CAN'T FIND A SUITABLE MILLING CUTTER?

No problem – simply customize an existing tool. Using our configurator for special milling cutters, you can customize existing tools to your needs in an instant or create your own tools based on predefined types.

WE WILL RESPOND TO ALL REQUESTS SUBMITTED VIA THE CONFIGURATOR WITHIN ONE WORKING DAY AT THE LATEST



Cooling

Tolerance

rs

Coating

BetaUni Iron

Strategy

UNI

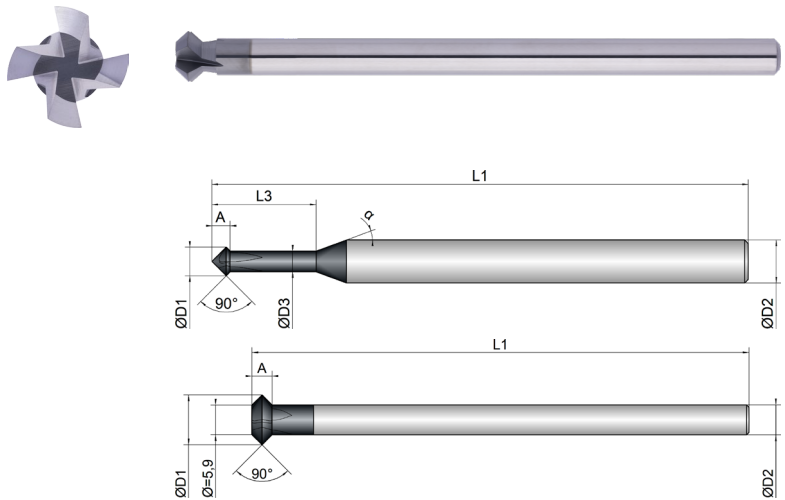
Application

Features

HA

Basic

- For universal chamfering of work pieces
- Variant made of blank form for deep cavities
- Forwards and backwards cutting



Roughing					Finishing			
inappropriate					inappropriate			
optimal					optimal			

BCU1-M10-0123	D1 mm ø	D3 mm ø	A mm	L3 mm	L1 mm	D2 mm ø	z #	α °
3	3.0	2.2	2.0	10.0	75.0	4.0	4	20
3,8	3.8	2.9	2.7	13.0	75.0	4.0	4	20
4	4.0	2.9	2.7	13.0	75.0	4.0	4	20
4,8	4.8	3.9	3.0	15.0	75.0	5.0	4	20
5	5.0	3.9	3.0	15.0	75.0	5.0	4	20
5,8	5.8	3.9	4.0	15.0	100.0	6.0	4	20
6	6.0	3.9	4.0	15.0	100.0	6.0	4	20
7,8	7.8		2.0		100.0	6.0	4	0
8	8.0		2.0		100.0	6.0	4	0
9,8	9.8		4.0		100.0	6.0	4	0
10	10.0		4.0		100.0	6.0	4	0
11,8	11.8		6.0		100.0	6.0	4	0
12	12.0		6.0		100.0	6.0	4	0

Download Catalog Pages (PDF)

		Dimension	Ø3	Ø3.8	Ø4	Ø4.8	Ø5	Ø5.8	Ø6	Ø7.8	Ø8	Ø9.8
Infeed in mm			ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD
Application												
		Strength (N/mm²)	Feed (mm/Z)	fz	fz	fz	fz	fz	fz	fz	fz	fz
P		STEEL	Vc (m/min)									
1.1-1.3	unalloyed	<850	75	0.015	0.018	0.018	0.02	0.02	0.025	0.025	0.03	0.035
2.1-2.2	low-alloyed	<950	55	0.012	0.016	0.016	0.018	0.018	0.023	0.023	0.028	0.033
3.1-3.2	high-alloyed	<1100	40	0.01	0.014	0.014	0.015	0.015	0.02	0.02	0.025	0.03
K		CASTINGS	Vc (m/min)									
1.1-1.2	grey cast iron	<1000	45	0.012	0.016	0.016	0.018	0.018	0.023	0.023	0.028	0.033
M		STAINLESS STEEL	Vc (m/min)									
1.1	ferritic/martensitic	<850	35	0.01	0.014	0.014	0.016	0.016	0.02	0.02	0.024	0.028
2.1	austenitic	<650	30	0.008	0.012	0.012	0.014	0.014	0.018	0.018	0.022	0.026
N		NON-FERROUS	Vc (m/min)									
1.1-2.3	ALUMINIUM alloyed/cast	<600	150	0.02	0.023	0.023	0.025	0.025	0.03	0.03	0.035	0.04
3.1-3.3	COPPER alloyed	<600	80	0.012	0.014	0.014	0.015	0.015	0.02	0.02	0.025	0.03
T		TITANIUM	Vc (m/min)									
2.1-2.2	pure/alloyed	<1000	30	0.008	0.012	0.012	0.014	0.014	0.018	0.018	0.022	0.026
S		SUPER ALLOYS	Vc (m/min)									
1.1-1.3	HRSA	<1450	20	0.007	0.01	0.01	0.012	0.012	0.016	0.016	0.02	0.024

			Dimension	Ø10	Ø11.8	Ø12
			Infeed in mm	ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD	ae= 0.1xD ap= 0.1xD
			Application			
	Material	Strength (N/mm²)	Feed (mm/Z)	fz	fz	fz
P	STEEL		Vc (m/min)			
1.1-1.3	unalloyed	<850	75	0.035	0.04	0.04
2.1-2.2	low-alloyed	<950	55	0.033	0.038	0.038
3.1-3.2	high-alloyed	<1100	40	0.03	0.035	0.035
K	CASTINGS		Vc (m/min)			
1.1-1.2	grey cast iron	<1000	45	0.033	0.038	0.038
M	STAINLESS STEEL		Vc (m/min)			
1.1	ferritic/martensitic	<850	35	0.028	0.034	0.034
2.1	austenitic	<650	30	0.026	0.032	0.032
N	NON-FERROUS		Vc (m/min)			
1.1-2.3	ALUMINIUM alloyed/cast	<600	150	0.04	0.045	0.045
3.1-3.3	COPPER alloyed	<600	80	0.03	0.035	0.035
T	TITANIUM		Vc (m/min)			
2.1-2.2	pure/alloyed	<1000	30	0.026	0.032	0.032
S	SUPER ALLOYS		Vc (m/min)			
1.1-1.3	HRSA	<1450	20	0.024	0.03	0.03
ADVICE The values marked in turquoise are side applications!						

Cooling









Tolerance

V1

Coating

BetaUni Iron

Strategy

UNI

Application



Features

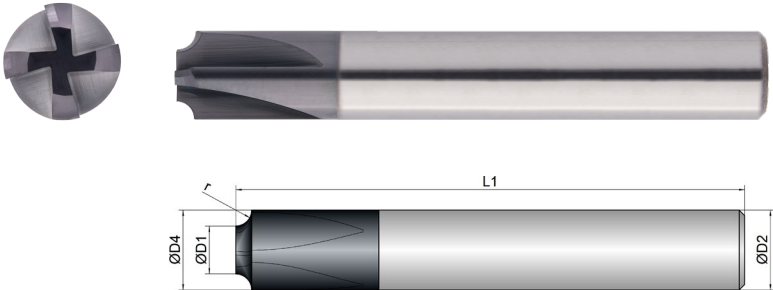
HA





Basic



■ For the universal manufacturing of radii to components



Roughing					Finishing				
inappropriate					inappropriate				
optimal					optimal				

BCU1-M11-0023	D1  mm ø	D4  mm ø	L1  mm	D2  mm ø	z  #	r  mm
3/0,5	3.0	4	50.0	4.0	4	0.50
3,2/0,4	3.2	4	50.0	4.0	4	0.40
3,4/0,3	3.4	4	50.0	4.0	4	0.30
3,6/0,2	3.6	4	50.0	4.0	4	0.20
4/1	4.0	6	50.0	6.0	4	1.00
4,4/0,8	4.4	6	50.0	6.0	4	0.80
4,8/0,6	4.8	6	50.0	6.0	4	0.60
5/10	5.0	25	100.0	25.0	4	10.00
6/2	6.0	10	66.0	10.0	4	2.00
6/3	6.0	12	73.0	12.0	4	3.00
7/1,5	7.0	10	66.0	10.0	4	1.50
7/2,5	7.0	12	73.0	12.0	4	2.50
7/4,5	7.0	16	82.0	16.0	4	4.50
8/4	8.0	16	82.0	16.0	4	4.00
8/6	8.0	20	80.0	20.0	4	6.00
9/3,5	9.0	16	82.0	16.0	4	3.50
9/8	9.0	25	100.0	25.0	4	8.00
10/5	10.0	20	80.0	20.0	4	5.00



Download Catalog Pages (PDF)

		Dimension	Ø3.6 R0.2	Ø3.4 R0.3	Ø3.2 R0.4	Ø3 R0.5	Ø4.8 R0.6	Ø4.4 R0.8	Ø4 R1	Ø7 R1.5	Ø6 R2	Ø7 R2.5	
		Infeed in mm	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	
		Application											
Material	Strength (N/mm²)	Feed (mm/Z)	fz	fz	fz	fz	fz	fz	fz	fz	fz	fz	
P	STEEL	Vc (m/min)											
1.1-1.3	unalloyed	<850	170	0.024	0.024	0.024	0.024	0.028	0.028	0.028	0.03	0.034	0.038
2.1-2.2	low-alloyed	<950	150	0.02	0.02	0.02	0.02	0.024	0.024	0.024	0.026	0.03	0.034
3.1-3.2	high-alloyed	<1100	100	0.016	0.016	0.016	0.016	0.02	0.02	0.02	0.022	0.026	0.03
K	CASTINGS	Vc (m/min)											
1.1-1.2	grey cast iron	<1000	125	0.016	0.016	0.016	0.016	0.02	0.02	0.02	0.022	0.026	0.03
M	STAINLESS STEEL	Vc (m/min)											
1.1	ferritic/martensitic	<850	85	0.012	0.012	0.012	0.012	0.016	0.016	0.016	0.018	0.022	0.026
2.1	austenitic	<650	75	0.01	0.01	0.01	0.01	0.014	0.014	0.014	0.016	0.02	0.024
N	NON-FERROUS	Vc (m/min)											
1.1-2.3	ALUMINIUM alloyed/cast	<600	500	0.029	0.029	0.029	0.029	0.033	0.033	0.033	0.035	0.039	0.043
3.1-3.3	COPPER alloyed	<600	180	0.02	0.02	0.02	0.02	0.024	0.024	0.024	0.026	0.03	0.034
T	TITANIUM	Vc (m/min)											
2.1-2.2	pure/alloyed	<1000	40	0.012	0.012	0.012	0.012	0.016	0.016	0.016	0.018	0.022	0.026
S	SUPER ALLOYS	Vc (m/min)											
1.1-1.3	HRSA	<1450	25	0.01	0.01	0.01	0.01	0.014	0.014	0.014	0.016	0.02	0.024

		Dimension	Ø6 R3	Ø9 R3.5	Ø8 R4	Ø7 R4.5	Ø10 R5	Ø8 R6	Ø9 R8	Ø5 R10	
		Infeed in mm	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	
		Application									
Material	Strength (N/mm²)	Feed (mm/Z)	fz	fz	fz	fz	fz	fz	fz	fz	
P	STEEL	Vc (m/min)									
1.1-1.3	unalloyed	<850	170	0.038	0.04	0.04	0.04	0.041	0.041	0.045	0.045
2.1-2.2	low-alloyed	<950	150	0.034	0.036	0.036	0.036	0.037	0.037	0.04	0.04
3.1-3.2	high-alloyed	<1100	100	0.03	0.032	0.032	0.032	0.033	0.033	0.035	0.035
K	CASTINGS	Vc (m/min)									
1.1-1.2	grey cast iron	<1000	125	0.03	0.032	0.032	0.032	0.033	0.033	0.035	0.035
M	STAINLESS STEEL	Vc (m/min)									
1.1	ferritic/martensitic	<850	85	0.026	0.028	0.028	0.028	0.029	0.029	0.03	0.03
2.1	austenitic	<650	75	0.024	0.026	0.026	0.026	0.027	0.027	0.028	0.028
N	NON-FERROUS	Vc (m/min)									
1.1-2.3	ALUMINIUM alloyed/cast	<600	500	0.043	0.045	0.045	0.045	0.046	0.046	0.05	0.05
3.1-3.3	COPPER alloyed	<600	180	0.034	0.036	0.036	0.036	0.037	0.037	0.04	0.04
T	TITANIUM	Vc (m/min)									
2.1-2.2	pure/alloyed	<1000	40	0.026	0.028	0.028	0.028	0.029	0.029	0.03	0.03
S	SUPER ALLOYS	Vc (m/min)									
1.1-1.3	HRSA	<1450	25	0.024	0.026	0.026	0.026	0.027	0.027	0.028	0.028
ADVICE The values marked in turquoise are side applications!											
Please use the arithmetic average from D2 and D1 to calculate cutting datas. For example tool Ø5 R10, D1=Ø5; R=10 calculated diameter = Ø15 Formula: D1+R= Result Example: 5mm+10mm=15mm											

 BCUI SERIES | 123

Cooling









Tolerance

V1

Coating

BetaUni Iron

Strategy

UNI

Application



Features

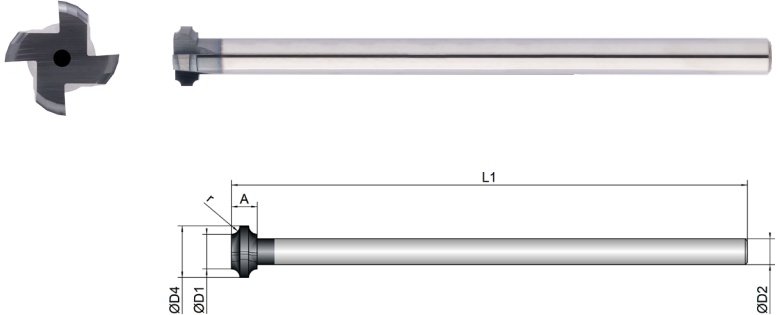
HA





Basic



- For the universal manufacturing of radii to components
- Variant made of blank form for deep cavities
- Forwards and backwards cutting



Roughing					Finishing				
inappropriate					inappropriate				
optimal					optimal				

BCU1-M12-0023	D1  mm ø	D4  mm ø	A  mm	L1  mm	D2  mm ø	z  #	r  mm
5/0,5	5.0	6	2.0	75.0	4.0	4	0.50
5,2/0,4	5.2	6	2.0	75.0	4.0	4	0.40
5,4/0,3	5.4	6	2.0	75.0	4.0	4	0.30
5,6/0,2	5.6	6	2.0	75.0	4.0	4	0.20
7/0,5	7.0	8	2.0	100.0	6.0	4	0.50
7/1,5	7.0	10	5.0	100.0	6.0	4	1.50
7/2,5	7.0	12	8.0	100.0	6.0	4	2.50
7,2/0,4	7.2	8	2.0	100.0	6.0	4	0.40
7,4/0,3	7.4	8	2.0	100.0	6.0	4	0.30
7,6/0,2	7.6	8	2.0	100.0	6.0	4	0.20
7,6/1,2	7.6	10	5.0	100.0	6.0	4	1.20
8/1	8.0	10	4.0	100.0	6.0	4	1.00
8/2	8.0	12	7.0	100.0	6.0	4	2.00
8,4/0,8	8.4	10	4.0	100.0	6.0	4	0.80
8,4/1,8	8.4	12	6.0	100.0	6.0	4	1.80



Download Catalog Pages (PDF)

		Dimension	Ø5.6 R0.2	Ø7.6 R0.2	Ø5.4 R0.3	Ø7.4 R0.3	Ø5.2 R0.4	Ø7.2 R0.4	Ø5 R0.5	Ø7 R0.5	Ø8.4 R0.8	Ø8 R1	
Infeed in mm			ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	
Application													
		Feed (mm/Z)	fz	fz	fz	fz	fz	fz	fz	fz	fz	fz	
P	STEEL	Vc (m/min)											
1.1-1.3	unalloyed	<850	70	0.012	0.015	0.012	0.015	0.012	0.015	0.012	0.015	0.018	0.018
2.1-2.2	low-alloyed	<950	40	0.01	0.013	0.01	0.013	0.01	0.013	0.01	0.013	0.016	0.016
3.1-3.2	high-alloyed	<1100	35	0.008	0.011	0.008	0.011	0.008	0.011	0.008	0.011	0.014	0.014
K	CASTINGS	Vc (m/min)											
1.1-1.2	grey cast iron	<1000	40	0.01	0.013	0.01	0.013	0.01	0.013	0.01	0.013	0.016	0.016
M	STAINLESS STEEL	Vc (m/min)											
1.1	ferritic/martensitic	<850	35	0.008	0.011	0.008	0.011	0.008	0.011	0.008	0.011	0.014	0.014
2.1	austenitic	<650	30	0.007	0.01	0.007	0.01	0.007	0.01	0.007	0.01	0.013	0.013
N	NON-FERROUS	Vc (m/min)											
1.1-2.3	ALUMINIUM alloyed/cast	<600	120	0.014	0.018	0.014	0.018	0.014	0.018	0.014	0.018	0.021	0.021
3.1-3.3	COPPER alloyed	<600	60	0.01	0.013	0.01	0.013	0.01	0.013	0.01	0.013	0.016	0.016
T	TITANIUM	Vc (m/min)											
2.1-2.2	pure/alloyed	<1000	20	0.008	0.011	0.008	0.011	0.008	0.011	0.008	0.011	0.014	0.014
S	SUPER ALLOYS	Vc (m/min)											
1.1-1.3	HRSA	<1450	12	0.007	0.01	0.007	0.01	0.007	0.01	0.007	0.01	0.013	0.013

		Dimension	Ø7.6 R1.2	Ø7 R1.5	Ø8.4 R1.8	Ø8 R2	Ø7 R2.5	
Infeed in mm			ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	ae= rmax ap= rmax	
Application								
		Feed (mm/Z)	fz	fz	fz	fz	fz	
P	STEEL	Vc (m/min)						
1.1-1.3	unalloyed	<850	70	0.018	0.018	0.02	0.02	0.02
2.1-2.2	low-alloyed	<950	40	0.016	0.016	0.018	0.018	0.018
3.1-3.2	high-alloyed	<1100	35	0.014	0.014	0.016	0.016	0.016
K	CASTINGS	Vc (m/min)						
1.1-1.2	grey cast iron	<1000	40	0.016	0.016	0.018	0.018	0.018
M	STAINLESS STEEL	Vc (m/min)						
1.1	ferritic/martensitic	<850	35	0.014	0.014	0.016	0.016	0.016
2.1	austenitic	<650	30	0.013	0.013	0.015	0.015	0.015
N	NON-FERROUS	Vc (m/min)						
1.1-2.3	ALUMINIUM alloyed/cast	<600	120	0.021	0.021	0.024	0.024	0.024
3.1-3.3	COPPER alloyed	<600	60	0.016	0.016	0.018	0.018	0.018
T	TITANIUM	Vc (m/min)						
2.1-2.2	pure/alloyed	<1000	20	0.014	0.014	0.016	0.016	0.016
S	SUPER ALLOYS	Vc (m/min)						
1.1-1.3	HRSA	<1450	12	0.013	0.013	0.015	0.015	0.015

ADVICE |

The values marked in turquoise are side applications!

Please use the arithmetic average from D2 and D1 to calculate cutting datas.
For example tool Ø5 R10, D1=Ø5; R=10 calculated diameter = Ø15 Formula: D1+R= Result Example: 5mm+10mm=15mm

Cooling









Tolerance

h6

Coating

BetaUni Iron

Strategy

UNI

Application



Features

HA

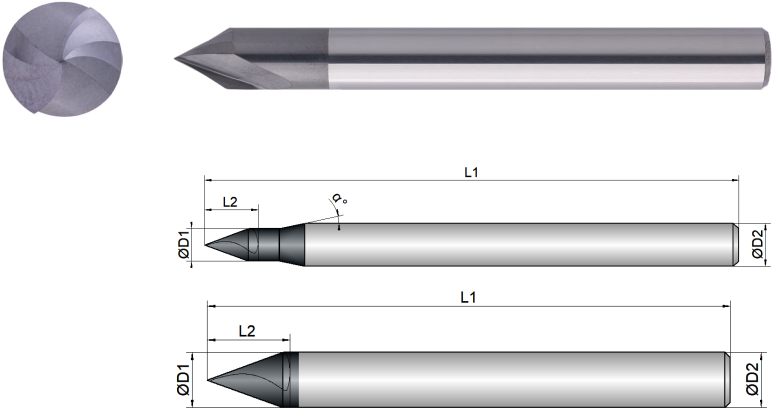




Basic



■ Rounded face for a longer tool life

■ For universal engraving and inscribing



Roughing				Finishing		
inappropriate				inappropriate		
optimal				optimal		
BCU1-M13-0123	D1  mm Ø	L2  mm	L1  mm	D2  mm Ø	z  #	 °
3	3.0	3.0	50.0	4.0	2	35
4	4.0	5.0	50.0	4.0	2	35
6	6.0	7.0	57.0	6.0	2	35



Download Catalog Pages (PDF)

Material		Strength (N/mm²)	Engraving	Materialgroup Factor fz
P STEEL			Vc = m/min	
1.1-1.3	unalloyed	<850	130	1
2.1-2.2	low alloyed	<950	110	0.9
3.1-3.2	high alloyed	<1100	80	0.8
K CASTINGS			Vc = m/min	
1.1-1.2	grey cast iron	<1000	100	0.9
M STAINLESS STEEL			Vc = m/min	
1.1	ferritic/martensitic	<850	85	1
2.1	austenitic	<650	70	0.9
N NON-FERROUS			Vc = m/min	
1.1-2.3	ALUMINIUM alloyed/cast	<600	300	1.6
3.1-3.3	COPPER alloyed	<600	110	1.5
T TITANIUM			Vc = m/min	
2.1-2.2	pure/alloyed	<1000	40	0.8
S SUPER ALLOYS			Vc = m/min	
1.1-1.3	HRSA	<1450	20	0.7
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1 - 1.3, consider factors for the other groups! The specified values represent starting values. Depending on the material, it may be necessary to change the Vc or Fz value.				

D1	L2	Immersion Angle	Engraving		
			fz (mm/Z)	ae = 0.1xD (mm)	ap = 0.1xD (mm)
					
Ø	mm	α°			
3	3		0.03	0.3	0.3
4	5		0.04	0.4	0.4
6	7		0.05	0.6	0.6

Cooling

Tolerance

f8

Coating

BetaUni Iron

Strategy

HSCUNI

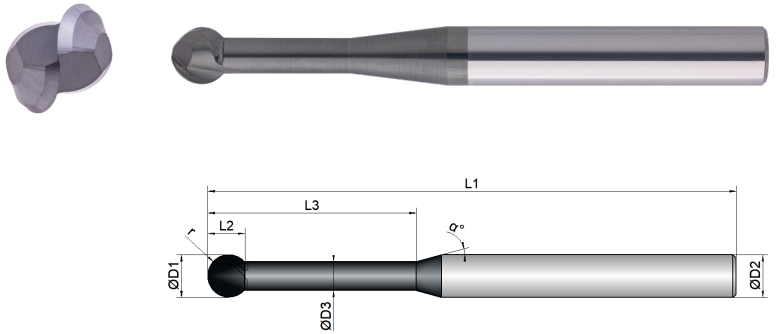
Application

Features

HA

Basic

- For universal forward and backward deburring of work pieces
- Suitable for undercut machining thanks to the 260° cutting edge



Roughing					Finishing			
inappropriateoptimal					inappropriateoptimal			
BCU1-M26-0123	D1 mm ø	D3 mm ø	L3 mm	L1 mm	D2 mm ø	z #	r mm	 °
0,8	0.8	0.5	3.0	50.0	4.0	2	0.40	30
1,3	1.3	0.8	5.0	50.0	4.0	2	0.65	30
1,8	1.8	1.1	6.0	50.0	4.0	2	0.90	30
2,3	2.3	1.4	8.0	70.0	6.0	2	1.15	30
2,8	2.8	1.7	9.0	70.0	6.0	2	1.40	30
3,3	3.3	2.0	11.0	70.0	6.0	2	1.65	30
3,8	3.8	2.4	12.0	70.0	6.0	2	1.90	30
4,8	4.8	3.0	15.0	70.0	6.0	2	2.40	30
5,8	5.8	3.5	18.0	70.0	6.0	2	2.90	30
7,8	7.8	4.7	24.0	90.0	8.0	2	3.90	30
9,8	9.8	5.9	30.0	100.0	10.0	2	4.90	30

Download Catalog Pages (PDF)


		Finishing		Deburring		Materialgroup Factor fz / a
P	STEEL	Vc = m/min		Vc = m/min		
1.1-1.3	unalloyed	<850		260		1
2.1-2.2	low alloyed	<950		220		0.9
3.1-3.2	high alloyed	<1100		200		0.8
K	CASTINGS	Vc = m/min		Vc = m/min		
1.1-1.2	grey cast iron	<1000		280		0.9
M	STAINLESS STEEL	Vc = m/min		Vc = m/min		
1.1	ferritic/martensitic	<850		85		1
2.1	austenitic	<650		70		0.9
N	NON-FERROUS	Vc = m/min		Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/cast	<600		440		1.6
3.1-3.3	COPPER alloyed	<600		180		1.5
T	TITANIUM	Vc = m/min		Vc = m/min		
2.1-2.2	pure/alloyed	<1000		40		0.8
S	SUPER ALLOYS	Vc = m/min		Vc = m/min		
1.1-1.3	HRSA	<1450		30		0.7
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1 - 1.3, consider factors for the other groups! The specified values represent starting values. Depending on the material, it may be necessary to change the Vc or Fz value.						

Material P 1.1-1.3							
D1 ø	Immersion Angle α°	Finishing			Deburring		
		fz (mm/Z)	ae = 0.1xD (mm)	ap = 0.1xD (mm)	fz (mm/Z)	ae = 0.1xD (mm)	ap = 0.1xD (mm)
0.8		0.015	0.08	0.08	0.008	0.08	0.08
1.3		0.025	0.13	0.13	0.01	0.13	0.13
1.8		0.038	0.18	0.18	0.012	0.18	0.18
2.3		0.042	0.23	0.23	0.012	0.23	0.23
2.8		0.048	0.28	0.28	0.015	0.28	0.28
3.3		0.054	0.33	0.33	0.018	0.33	0.33
3.8		0.058	0.38	0.38	0.018	0.38	0.38
4.8		0.065	0.48	0.48	0.02	0.48	0.48
5.8		0.08	0.58	0.58	0.025	0.58	0.58
7.8		0.11	0.78	0.78	0.03	0.78	0.78
9.8		0.12	0.98	0.98	0.035	0.98	0.98

Cooling	
Tolerance	e8
Coating	BetaUni Iron

Strategy	UNI	Basic
Application		
Features	HA 60°	

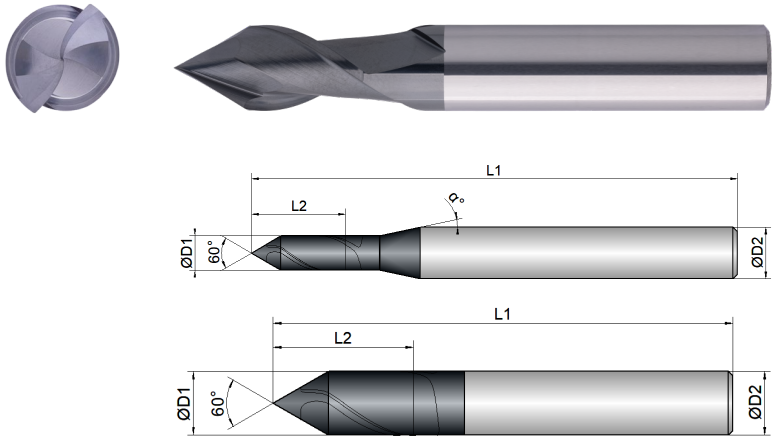■ Universal tool for spot drilling, countersinking, deburring and centering in various materials



Roughing				Finishing			
inappropriateoptimal				inappropriateoptimal			
BCU1-M27-0123	D1 mm Ø	L2 mm	L1 mm	D2 mm Ø	z #	°	α °
3	3.0	8.0	57.0	6.0	2	35	12
4	4.0	11.0	57.0	6.0	2	35	12
5	5.0	13.0	57.0	6.0	2	35	12
6	6.0	13.0	57.0	6.0	2	35	0
8	8.0	19.0	63.0	8.0	2	35	0
10	10.0	22.0	72.0	10.0	2	35	0
12	12.0	26.0	83.0	12.0	2	35	0

		Deburring / Milling		Centering / Drilling		Materialgroup Factor fz / a
Download Catalog Pages (PDF)						
Material	Strength (N/mm²)					
P	STEEL	Vc = m/min	Vc = m/min			
1.1-1.3	unalloyed	<850	140	100	1	
2.1-2.2	low alloyed	<950	115	85	0.9	
3.1-3.2	high alloyed	<1100	85	60	0.8	
K	CASTINGS	Vc = m/min	Vc = m/min			
1.1-1.2	grey cast iron	<1000	110	100	0.9	
M	STAINLESS STEEL	Vc = m/min	Vc = m/min			
1.1	ferritic/martensitic	<850	90	35	1	
2.1	austenitic	<650	75	30	0.9	
N	NON-FERROUS	Vc = m/min	Vc = m/min			
1.1-2.3	ALUMINIUM alloyed/cast	<600	320	240	1.6	
3.1-3.3	COPPER alloyed	<600	140	100	1.5	
T	TITANIUM	Vc = m/min	Vc = m/min			
2.1-2.2	pure/alloyed	<1000	50	40	0.8	
S	SUPER ALLOYS	Vc = m/min	Vc = m/min			
1.1-1.3	HRSA	<1450	25	15	0.7	
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1 - 1.3, consider factors for the other groups! The specified values represent starting values. Depending on the material, it may be necessary to change the Vc or Fz value.						

Material P 1.1-1.3


D1 Ø	L2 mm	Immersion Angle α°	Deburring / Milling			Centering / Drilling		
			fz (mm/Z)	ae = 0.1xD (mm)	ap (mm)	fu (mm/r)	ae = 1xD (mm)	ap (mm)
3	8		0.02	0.3	L2max	0.035	3	L2max
4	11		0.03	0.4	L2max	0.04	4	L2max
5	13		0.04	0.5	L2max	0.04	5	L2max
6	13		0.05	0.6	L2max	0.045	6	L2max
8	19		0.06	0.8	L2max	0.05	8	L2max
10	22		0.07	1	L2max	0.055	10	L2max
12	26		0.08	1.2	L2max	0.06	12	L2max

Cooling	
Tolerance	e8
Coating	BetaUni Iron

Strategy	UNI	
Application		
Features	HA	90°



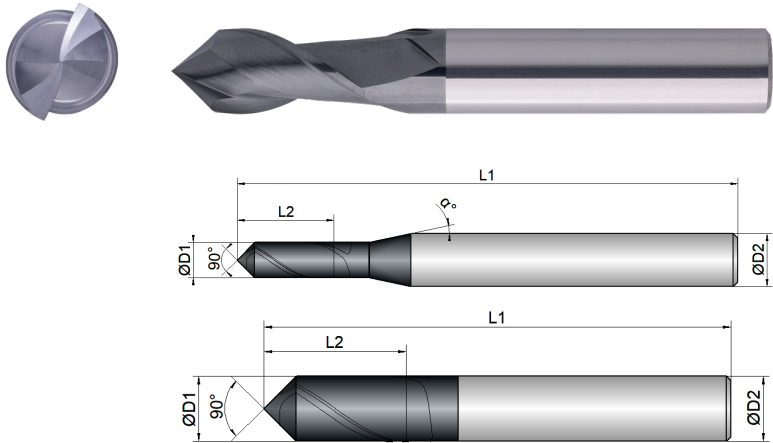■ Universal tool for spot drilling, countersinking, deburring and centering in various materials



Roughing				Finishing			
inappropriate				optimal			
BCU1-M27-0143	D1 mm Ø	L2 mm	L1 mm	D2 mm Ø	z #	°	α °
1	1.0	2.5	50.0	4.0	2	35	12
1,2	1.2	3.0	50.0	4.0	2	35	12
1,5	1.5	3.5	50.0	4.0	2	35	12
2	2.0	5.0	50.0	4.0	2	35	12
2,5	2.5	6.0	50.0	4.0	2	35	12
3	3.0	8.0	57.0	6.0	2	35	12
4	4.0	11.0	57.0	6.0	2	35	12
5	5.0	13.0	57.0	6.0	2	35	12
6	6.0	13.0	57.0	6.0	2	35	0
8	8.0	19.0	63.0	8.0	2	35	0
10	10.0	22.0	72.0	10.0	2	35	0
12	12.0	26.0	83.0	12.0	2	35	0



Download Catalog Pages (PDF)

		Deburring / Milling		Centering / Drilling		Materialgroup Factor fz / a
						
	Material	Strength (N/mm²)				
P	STEEL		Vc = m/min	Vc = m/min		
1.1-1.3	unalloyed	<850	140	100		1
2.1-2.2	low alloyed	<950	115	85		0.9
3.1-3.2	high alloyed	<1100	85	60		0.8
K	CASTINGS		Vc = m/min	Vc = m/min		
1.1-1.2	grey cast iron	<1000	110	100		0.9
M	STAINLESS STEEL		Vc = m/min	Vc = m/min		
1.1	ferritic/martensitic	<850	90	35		1
2.1	austenitic	<650	75	30		0.9
N	NON-FERROUS		Vc = m/min	Vc = m/min		
1.1-2.3	ALUMINIUM alloyed/cast	<600	320	240		1.6
3.1-3.3	COPPER alloyed	<600	140	100		1.5
T	TITANIUM		Vc = m/min	Vc = m/min		
2.1-2.2	pure/alloyed	<1000	50	40		0.8
S	SUPER ALLOYS		Vc = m/min	Vc = m/min		
1.1-1.3	HRSA	<1450	25	15		0.7
ADVICE The values marked in turquoise are side applications! All fz/a values in the table for material group 1.1 - 1.3, consider factors for the other groups! The specified values represent starting values. Depending on the material, it may be necessary to change the Vc or Fz value.						


Material P 1.1-1.3



D1	L2	Immersion Angle α°	Deburring / Milling			Centering / Drilling		
			fz (mm/Z)	ae = 0.1xD (mm)	ap (mm)	fu (mm/r)	ae = 1xD (mm)	ap (mm)
Ø	mm	α°						
1	2.5		0.008	0.1	L2max	0.02	1	L2max
1.2	3		0.01	0.12	L2max	0.02	1.2	L2max
1.5	3.5		0.012	0.15	L2max	0.025	1.5	L2max
2	5		0.015	0.2	L2max	0.03	2	L2max
2.5	6		0.018	0.25	L2max	0.03	2.5	L2max
3	8		0.02	0.3	L2max	0.035	3	L2max
4	11		0.03	0.4	L2max	0.04	4	L2max
5	13		0.04	0.5	L2max	0.04	5	L2max
6	13		0.05	0.6	L2max	0.045	6	L2max
8	19		0.06	0.8	L2max	0.05	8	L2max
10	22		0.07	1	L2max	0.055	10	L2max
12	26		0.08	1.2	L2max	0.06	12	L2max


Cooling	
Tolerance	h7
Coating	BetaUni Iron

Strategy	UNI	HPC	 Basic
Application			
Features	HA	3xD	
			

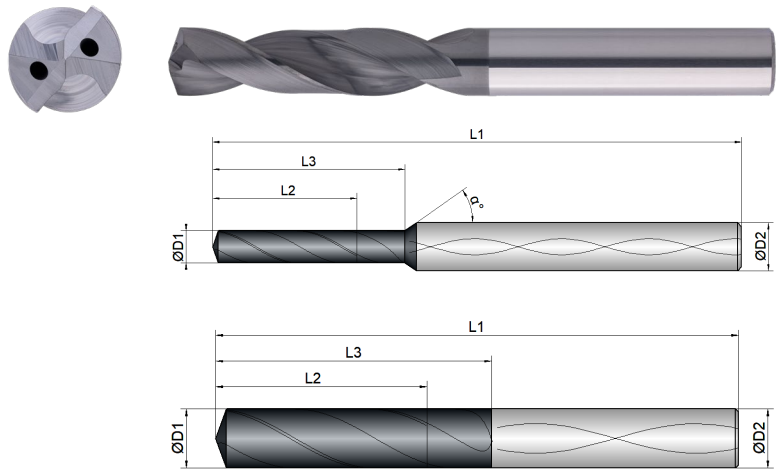- Versatile universal geometry
 - Double-guided chip space for ideal chip evacuation
 - Polished surfaces for minimised frictional resistance
- Specially curved face cutting edge for higher feed rates and secure centring



BCU1-D01-0213	 mm Ø	 mm	 mm	 mm Ø	 mm
3	3	15	20	6	62
3,1	3.1	15	20	6	62
1/8	3.175 (1/8 ")	15	20	6	62
3,2	3.2	15	20	6	62
3,3	3.3	15	20	6	62
3,4	3.4	15	20	6	62
3,5	3.5	15	20	6	62
3,6	3.6	15	20	6	62
3,7	3.7	15	20	6	62
3,8	3.8	18	24	6	66
3,9	3.9	18	24	6	66
5/32	3.96875 (5/32 ")	18	24	6	66
4	4	18	24	6	66
4,1	4.1	18	24	6	66
4,2	4.2	18	24	6	66
4,3	4.3	18	24	6	66

BCU1-D01-0213	 mm Ø	 mm	 mm	 mm Ø	 mm
4,4	4.4	18	24	6	66
4,5	4.5	18	24	6	66
4,6	4.6	18	24	6	66
4,7	4.7	18	24	6	66
3/16	4.7625 (3/16 ")	21	28	6	66
4,8	4.8	21	28	6	66
4,9	4.9	21	28	6	66
5	5	21	28	6	66
5,1	5.1	21	28	6	66
5,2	5.2	21	28	6	66
5,3	5.3	21	28	6	66
5,4	5.4	21	28	6	66
7/32	5.55625 (7/32 ")	21	28	6	66
5,5	5.5	21	28	6	66
5,6	5.6	21	28	6	66
5,7	5.7	21	28	6	66
5,8	5.8	21	28	6	66
5,9	5.9	21	28	6	66
6	6	21	28	6	66
6,1	6.1	25	34	8	79
6,15	6.15	25	34	8	79
6,2	6.2	25	34	8	79
6,3	6.3	25	34	8	79
6,35	6.35	25	34	8	79
6,4	6.4	25	34	8	79
6,5	6.5	25	34	8	79
6,6	6.6	25	34	8	79
6,7	6.7	25	34	8	79
6,8	6.8	25	34	8	79

BCU1-D01-0213	D1	L2	L3	D2	L1
					
6,9	6.9	25	34	8	79
7	7	25	34	8	79
7,1	7.1	31	41	8	79
9/32	7.14375 (9/32 ")	31	41	8	79
7,2	7.2	31	41	8	79
7,3	7.3	31	41	8	79
7,4	7.4	31	41	8	79
7,5	7.5	31	41	8	79
7,6	7.6	31	41	8	79
7,7	7.7	31	41	8	79
7,8	7.8	31	41	8	79
7,9	7.9	31	41	8	79
5/16	7.9375 (5/16 ")	31	41	8	79
8	8	31	41	8	79
8,1	8.1	36	47	10	89
8,2	8.2	36	47	10	89
8,3	8.3	36	47	10	89
8,4	8.4	36	47	10	89
8,5	8.5	36	47	10	89
8,6	8.6	36	47	10	89
8,7	8.7	36	47	10	89
11/32	8.73125 (11/32 ")	36	47	10	89
8,8	8.8	36	47	10	89
8,9	8.9	36	47	10	89
9	9	36	47	10	89
9,1	9.1	36	47	10	89
9,2	9.2	36	47	10	89
9,3	9.3	36	47	10	89
9,4	9.4	36	47	10	89

BCU1-D01-0213	D1	L2	L3	D2	L1
					
9,5	9.5	36	47	10	89
3/8	9.525 (3/8 ") 3/8	36	47	10	89
9,6	9.6	36	47	10	89
9,7	9.7	36	47	10	89
9,8	9.8	36	47	10	89
9,9	9.9	36	47	10	89
10	10	36	47	10	89
10,1	10.1	41	55	12	102
10,2	10.2	41	55	12	102
10,3	10.3	41	55	12	102
13/32	10.3187 (13/32 ")	41	55	12	102
10,4	10.4	41	55	12	102
10,5	10.5	41	55	12	102
10,6	10.6	41	55	12	102
10,7	10.7	41	55	12	102
10,8	10.8	41	55	12	102
10,9	10.9	41	55	12	102
11	11	41	55	12	102
11,1	11.1	41	55	12	102
7/16	11.1125 (7/16 ")	41	55	12	102
11,2	11.2	41	55	12	102
11,3	11.3	41	55	12	102
11,4	11.4	41	55	12	102
11,5	11.5	41	55	12	102
11,6	11.6	41	55	12	102
11,7	11.7	41	55	12	102
11,8	11.8	41	55	12	102
11,9	11.9	41	55	12	102
12	12	41	55	12	102



Download Catalog
Pages (PDF)

				Dimension	Ø2,5 - Ø3	Ø3,1 - Ø4	Ø4,1 - Ø5	Ø5,1 - Ø6	Ø6,1 - Ø7,5	Ø7,6 - Ø9	Ø9,1 - Ø10,5	Ø10,6 - Ø12	Ø12,2 - Ø14
				Depth (mm)	L2	L2	L2	L2	L2	L2	L2	L2	L2
				Application									
				Feed (mm/r)	fu	fu	fu	fu	fu	fu	fu	fu	fu
				Strength (N/mm²)									
				Material									
					Vc (m/min)								
P				STEEL									
1.1	1.1	unalloyed	<500	190	0.095	0.115	0.14	0.16	0.2	0.22	0.25	0.27	0.29
1.2-1.5	1.2-1.5	unalloyed	<1100	170	0.09	0.11	0.13	0.15	0.19	0.21	0.24	0.27	0.28
2.1-2.2	2.1-2.2	low alloyed	<950	130	0.09	0.11	0.13	0.15	0.19	0.21	0.24	0.27	0.28
2.3-2.4	2.3-2.4	low alloyed	<1300	90	0.085	0.1	0.12	0.14	0.18	0.2	0.23	0.25	0.27
3.1-3.2	3.1-3.2	high alloyed	<1100	110	0.085	0.1	0.12	0.14	0.18	0.2	0.23	0.25	0.27
3.3	3.3	high alloyed	<1400	85	0.075	0.09	0.11	0.13	0.17	0.19	0.22	0.24	0.26
K				CASTINGS	Vc (m/min)								
1.1-1.2	1.1-1.2	grey cast iron	<1000	150	0.11	0.13	0.15	0.17	0.21	0.23	0.26	0.28	0.3
M				STAINLESS STEEL	Vc (m/min)								
1.1	1.1	ferritic/martensitic	<850	110	0.065	0.08	0.09	0.11	0.13	0.15	0.17	0.19	0.2
2.1	2.1	austenitic	<650	90	0.06	0.07	0.08	0.1	0.12	0.13	0.14	0.16	0.18
2.2	2.2	austenitic	<750	80	0.06	0.07	0.08	0.1	0.12	0.13	0.14	0.16	0.18
3.1	3.1	DUPLEX STEEL super austenitic	<1100	80	0.05	0.058	0.067	0.09	0.11	0.12	0.13	0.145	0.16
N				NON-FERROUS	Vc (m/min)								
1.1-2.3	1.1-2.3	ALUMINIUM alloyed/cast	<600	250	0.15	0.16	0.18	0.2	0.21	0.23	0.26	0.3	0.32
3.1-3.3	3.1-3.3	COPPER alloyed	<600	180	0.07	0.085	0.095	0.125	0.145	0.16	0.175	0.19	0.22
T				TITANIUM	Vc (m/min)								
2.1-2.2	2.1-2.2	pure/alloyed	<1000	35	0.06	0.07	0.08	0.1	0.11	0.12	0.13	0.15	0.16
S				SUPER ALLOYS	Vc (m/min)								
1.1-1.3	1.1-1.3	HRSA	<1450	20	0.03	0.05	0.065	0.08	0.1	0.12	0.13	0.14	0.15
ADVICE The values marked in turquoise are side applications! Use maximum IC pressure. When using air cooling, please only use air through the spindle. Air cooling is only suitable to a limited extent, meaning that the tool needs some time to cool down after a certain number of holes have been drilled.													

DO YOU HAVE BLUNT
MILLING CUTTERS
THAT URGENTLY NEED
REGRINDING?



➔ DISCOVER OUR H&V
REGRINDING SERVICE


... and have your tools reconditioned to their
original state!






Cooling	
Tolerance	h7
Coating	BetaUni Iron

Strategy	UNI	HPC	
Application			
Features	HB	3xD	 

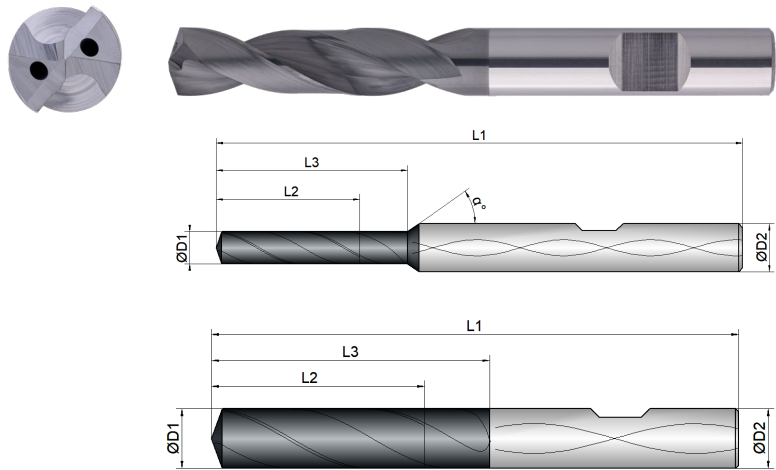- Versatile universal geometry
 - Double-guided chip space for ideal chip evacuation
 - Polished surfaces for minimised frictional resistance
- Specially curved face cutting edge for higher feed rates and secure centring



BCU1-D01-0214	 mm Ø	 mm	 mm	 mm Ø	 mm
3	3	15	20	6	62
3,1	3.1	15	20	6	62
1/8	3.175 (1/8 ")	15	20	6	62
3,2	3.2	15	20	6	62
3,3	3.3	15	20	6	62
3,4	3.4	15	20	6	62
3,5	3.5	15	20	6	62
3,6	3.6	15	20	6	62
3,7	3.7	15	20	6	62
3,8	3.8	18	24	6	66
3,9	3.9	18	24	6	66
5/32	3.96875 (5/32 ")	18	24	6	66
4	4	18	24	6	66
4,1	4.1	18	24	6	66
4,2	4.2	18	24	6	66
4,3	4.3	18	24	6	66

BCU1-D01-0214	 mm Ø	 mm	 mm	 mm Ø	 mm
4,4	4.4	18	24	6	66
4,5	4.5	18	24	6	66
4,6	4.6	18	24	6	66
4,7	4.7	18	24	6	66
3/16	4.7625 (3/16 ")	21	28	6	66
4,8	4.8	21	28	6	66
4,9	4.9	21	28	6	66
5	5	21	28	6	66
5,1	5.1	21	28	6	66
5,2	5.2	21	28	6	66
5,3	5.3	21	28	6	66
5,4	5.4	21	28	6	66
7/32	5.55625 (7/32 ")	21	28	6	66
5,5	5.5	21	28	6	66
5,6	5.6	21	28	6	66
5,7	5.7	21	28	6	66
5,8	5.8	21	28	6	66
5,9	5.9	21	28	6	66
6	6	21	28	6	66
6,1	6.1	25	34	8	79
6,15	6.15	25	34	8	79
6,2	6.2	25	34	8	79
6,3	6.3	25	34	8	79
6,35	6.35	25	34	8	79
6,4	6.4	25	34	8	79
6,5	6.5	25	34	8	79
6,6	6.6	25	34	8	79
6,7	6.7	25	34	8	79
6,8	6.8	25	34	8	79

BCU1-D01-0214	D1	L2	L3	D2	L1
	 mm ø	 mm	 mm	 mm ø	 mm
6,9	6.9	25	34	8	79
7	7	25	34	8	79
7,1	7.1	31	41	8	79
9/32	7.14375 (9/32 ")	31	41	8	79
7,2	7.2	31	41	8	79
7,3	7.3	31	41	8	79
7,4	7.4	31	41	8	79
7,5	7.5	31	41	8	79
7,6	7.6	31	41	8	79
7,7	7.7	31	41	8	79
7,8	7.8	31	41	8	79
7,9	7.9	31	41	8	79
5/16	7.9375 (5/16 ")	31	41	8	79
8	8	31	41	8	79
8,1	8.1	36	47	10	89
8,2	8.2	36	47	10	89
8,3	8.3	36	47	10	89
8,4	8.4	36	47	10	89
8,5	8.5	36	47	10	89
8,6	8.6	36	47	10	89
8,7	8.7	36	47	10	89
11/32	8.73125 (11/32 ")	36	47	10	89
8,8	8.8	36	47	10	89
8,9	8.9	36	47	10	89
9	9	36	47	10	89
9,1	9.1	36	47	10	89
9,2	9.2	36	47	10	89
9,3	9.3	36	47	10	89
9,4	9.4	36	47	10	89

BCU1-D01-0214	D1	L2	L3	D2	L1
	 mm ø	 mm	 mm	 mm ø	 mm
9,5	9.5	36	47	10	89
3/8	9.525 (3/8 ") 3/8	36	47	10	89
9,6	9.6	36	47	10	89
9,7	9.7	36	47	10	89
9,8	9.8	36	47	10	89
9,9	9.9	36	47	10	89
10	10	36	47	10	89
10,1	10.1	41	55	12	102
10,2	10.2	41	55	12	102
10,3	10.3	41	55	12	102
13/32	10.3187 (13/32 ")	41	55	12	102
10,4	10.4	41	55	12	102
10,5	10.5	41	55	12	102
10,6	10.6	41	55	12	102
10,7	10.7	41	55	12	102
10,8	10.8	41	55	12	102
10,9	10.9	41	55	12	102
11	11	41	55	12	102
11,1	11.1	41	55	12	102
7/16	11.1125 (7/16 ")	41	55	12	102
11,2	11.2	41	55	12	102
11,3	11.3	41	55	12	102
11,4	11.4	41	55	12	102
11,5	11.5	41	55	12	102
11,6	11.6	41	55	12	102
11,7	11.7	41	55	12	102
11,8	11.8	41	55	12	102
11,9	11.9	41	55	12	102
12	12	41	55	12	102



Download Catalog Pages (PDF)

				Dimension	Ø2,5 - Ø3	Ø3,1 - Ø4	Ø4,1 - Ø5	Ø5,1 - Ø6	Ø6,1 - Ø7,5	Ø7,6 - Ø9	Ø9,1 - Ø10,5	Ø10,6 - Ø12	Ø12,2 - Ø14
				Depth (mm)	L2	L2	L2	L2	L2	L2	L2	L2	L2
				Application									
				Feed (mm/r)	fu	fu	fu	fu	fu	fu	fu	fu	fu
				Strength (N/mm²)									
				Material									
					Vc (m/min)								
P	STEEL												
1.1	unalloyed	<500	190	0.095	0.115	0.14	0.16	0.2	0.22	0.25	0.27	0.29	
1.2-1.5	unalloyed	<1100	170	0.09	0.11	0.13	0.15	0.19	0.21	0.24	0.27	0.28	
2.1-2.2	low alloyed	<950	130	0.09	0.11	0.13	0.15	0.19	0.21	0.24	0.27	0.28	
2.3-2.4	low alloyed	<1300	90	0.085	0.1	0.12	0.14	0.18	0.2	0.23	0.25	0.27	
3.1-3.2	high alloyed	<1100	110	0.085	0.1	0.12	0.14	0.18	0.2	0.23	0.25	0.27	
3.3	high alloyed	<1400	85	0.075	0.09	0.11	0.13	0.17	0.19	0.22	0.24	0.26	
					Vc (m/min)								
K	CASTINGS												
1.1-1.2	grey cast iron	<1000	150	0.11	0.13	0.15	0.17	0.21	0.23	0.26	0.28	0.3	
					Vc (m/min)								
M	STAINLESS STEEL												
1.1	ferritic/martensitic	<850	110	0.065	0.08	0.09	0.11	0.13	0.15	0.17	0.19	0.2	
2.1	austenitic	<650	90	0.06	0.07	0.08	0.1	0.12	0.13	0.14	0.16	0.18	
2.2	austenitic	<750	80	0.06	0.07	0.08	0.1	0.12	0.13	0.14	0.16	0.18	
3.1	DUPLEX STEEL super austenitic	<1100	80	0.05	0.058	0.067	0.09	0.11	0.12	0.13	0.145	0.16	
					Vc (m/min)								
N	NON-FERROUS												
1.1-2.3	ALUMINIUM alloyed/cast	<600	250	0.15	0.16	0.18	0.2	0.21	0.23	0.26	0.3	0.32	
3.1-3.3	COPPER alloyed	<600	180	0.07	0.085	0.095	0.125	0.145	0.16	0.175	0.19	0.22	
					Vc (m/min)								
T	TITANIUM												
2.1-2.2	pure/alloyed	<1000	35	0.06	0.07	0.08	0.1	0.11	0.12	0.13	0.15	0.16	
					Vc (m/min)								
S	SUPER ALLOYS												
1.1-1.3	HRSA	<1450	20	0.03	0.05	0.065	0.08	0.1	0.12	0.13	0.14	0.15	
ADVICE The values marked in turquoise are side applications! Use maximum IC pressure. When using air cooling, please only use air through the spindle. Air cooling is only suitable to a limited extent, meaning that the tool needs some time to cool down after a certain number of holes have been drilled.													

STILL CAN'T FIND A SUITABLE MILLING CUTTER?

No problem – simply customize an existing tool. Using our configurator for special milling cutters, you can customize existing tools to your needs in an instant or create your own tools based on predefined types.

WE WILL RESPOND TO ALL REQUESTS SUBMITTED VIA THE CONFIGURATOR WITHIN ONE WORKING DAY AT THE LATEST



Cooling

Toleranceh7

CoatingBetaUni Iron

Strategy

UNI

HPC

Application

Features

HE

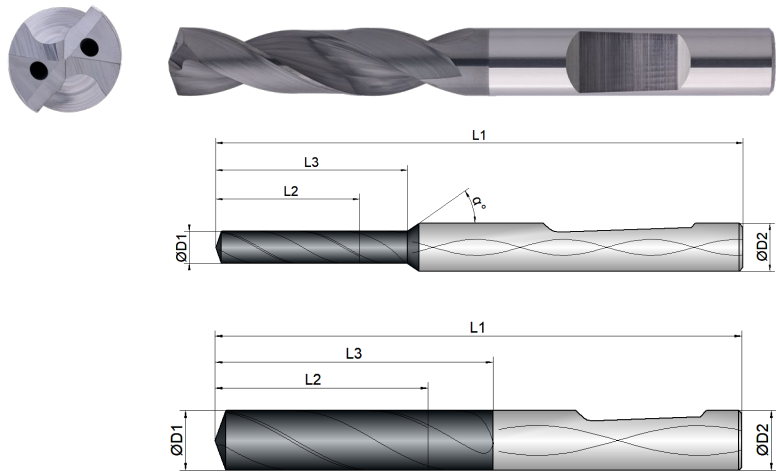
3xD



140°





Basic

- Versatile universal geometry
- Double-guided chip space for ideal chip evacuation
- Polished surfaces for minimised frictional resistance

 Specially curved face cutting edge for higher feed rates and secure centring Increased delivery time due to warehouse rework (HE)

BCU1-D01-0215	D1 mm ø	L2 mm	L3 mm	D2 mm ø	L1 mm
(3)	3	15	20	6	62
(3,1)	3.1	15	20	6	62
(1/8)	3.175 (1/8 ")	15	20	6	62
(3,2)	3.2	15	20	6	62
(3,3)	3.3	15	20	6	62
(3,4)	3.4	15	20	6	62
(3,5)	3.5	15	20	6	62
(3,6)	3.6	15	20	6	62
(3,7)	3.7	15	20	6	62
(3,8)	3.8	18	24	6	66
(3,9)	3.9	18	24	6	66
(5/32)	3.96875 (5/32 ")	18	24	6	66
(4)	4	18	24	6	66
(4,1)	4.1	18	24	6	66
(4,2)	4.2	18	24	6	66
(4,3)	4.3	18	24	6	66

	D1 mm ø	L2 mm	L3 mm	D2 mm ø	L1 mm
(4,4)	4.4	18	24	6	66
(4,5)	4.5	18	24	6	66
(4,6)	4.6	18	24	6	66
(4,7)	4.7	18	24	6	66
3/16()	4.7625 (3/16 ")	21	28	6	66
(4,8)	4.8	21	28	6	66
(4,9)	4.9	21	28	6	66
(5)	5	21	28	6	66
(5,1)	5.1	21	28	6	66
(5,2)	5.2	21	28	6	66
(5,3)	5.3	21	28	6	66
(5,4)	5.4	21	28	6	66
(7/32)	5.55625 (7/32 ")	21	28	6	66
(5,5)	5.5	21	28	6	66
(5,6)	5.6	21	28	6	66
(5,7)	5.7	21	28	6	66
(5,8)	5.8	21	28	6	66
(5,9)	5.9	21	28	6	66
(6)	6	21	28	6	66
(6,1)	6.1	25	34	8	79
(6,15)	6.15	25	34	8	79
(6,2)	6.2	25	34	8	79
(6,3)	6.3	25	34	8	79
(6,35)	6.35	25	34	8	79
(6,4)	6.4	25	34	8	79
(6,5)	6.5	25	34	8	79
(6,6)	6.6	25	34	8	79
(6,7)	6.7	25	34	8	79
(6,8)	6.8	25	34	8	79

BCU1-D01-0215	D1	L2	L3	D2	L1
					
(6,9)	6.9	25	34	8	79
(7)	7	25	34	8	79
(7,1)	7.1	31	41	8	79
(9/32)	7.14375 (9/32 ")	31	41	8	79
(7,2)	7.2	31	41	8	79
(7,3)	7.3	31	41	8	79
(7,4)	7.4	31	41	8	79
(7,5)	7.5	31	41	8	79
(7,6)	7.6	31	41	8	79
(7,7)	7.7	31	41	8	79
(7,8)	7.8	31	41	8	79
(7,9)	7.9	31	41	8	79
(5/16)	7.9375 (5/16 ")	31	41	8	79
(8)	8	31	41	8	79
(8,1)	8.1	36	47	10	89
(8,2)	8.2	36	47	10	89
(8,3)	8.3	36	47	10	89
(8,4)	8.4	36	47	10	89
(8,5)	8.5	36	47	10	89
(8,6)	8.6	36	47	10	89
(8,7)	8.7	36	47	10	89
(11/32)	8.73125 (11/32 ")	36	47	10	89
(8,8)	8.8	36	47	10	89
(8,9)	8.9	36	47	10	89
(9)	9	36	47	10	89
(9,1)	9.1	36	47	10	89
(9,2)	9.2	36	47	10	89
(9,3)	9.3	36	47	10	89
(9,4)	9.4	36	47	10	89

BCU1-D01-0215	D1	L2	L3	D2	L1
					
(9,5)	9.5	36	47	10	89
(3/8)	9.525 (3/8 ")	36	47	10	89
(9,6)	9.6	36	47	10	89
(9,7)	9.7	36	47	10	89
(9,8)	9.8	36	47	10	89
(9,9)	9.9	36	47	10	89
(10)	10	36	47	10	89
(10,1)	10.1	41	55	12	102
(10,2)	10.2	41	55	12	102
(10,3)	10.3	41	55	12	102
(13/32)	10.3187 (13/32 ")	41	55	12	102
(10,4)	10.4	41	55	12	102
(10,5)	10.5	41	55	12	102
(10,6)	10.6	41	55	12	102
(10,7)	10.7	41	55	12	102
(10,8)	10.8	41	55	12	102
(10,9)	10.9	41	55	12	102
(11)	11	41	55	12	102
(11,1)	11.1	41	55	12	102
(7/16)	11.1125 (7/16 ")	41	55	12	102
(11,2)	11.2	41	55	12	102
(11,3)	11.3	41	55	12	102
(11,4)	11.4	41	55	12	102
(11,5)	11.5	41	55	12	102
(11,6)	11.6	41	55	12	102
(11,7)	11.7	41	55	12	102
(11,8)	11.8	41	55	12	102
(11,9)	11.9	41	55	12	102
(12)	12	41	55	12	102



Download Catalog
Pages (PDF)

 Download Catalog Pages (PDF)			Dimension	Ø2,5 - Ø3	Ø3,1 - Ø4	Ø4,1 - Ø5	Ø5,1 - Ø6	Ø6,1 - Ø7,5	Ø7,6 - Ø9	Ø9,1 - Ø10,5	Ø10,6 - Ø12	Ø12,2 - Ø14
			Depth (mm)	L2	L2	L2	L2	L2	L2	L2	L2	L2
			Application									
				fu	fu	fu	fu	fu	fu	fu	fu	fu
	Material	Strength (N/mm²)	Feed (mm/r)									
P	STEEL		Vc (m/min)									
1.1	unalloyed	<500	190	0.095	0.115	0.14	0.16	0.2	0.22	0.25	0.27	0.29
1.2-1.5	unalloyed	<1100	170	0.09	0.11	0.13	0.15	0.19	0.21	0.24	0.27	0.28
2.1-2.2	low alloyed	<950	130	0.09	0.11	0.13	0.15	0.19	0.21	0.24	0.27	0.28
2.3-2.4	low alloyed	<1300	90	0.085	0.1	0.12	0.14	0.18	0.2	0.23	0.25	0.27
3.1-3.2	high alloyed	<1100	110	0.085	0.1	0.12	0.14	0.18	0.2	0.23	0.25	0.27
3.3	high alloyed	<1400	85	0.075	0.09	0.11	0.13	0.17	0.19	0.22	0.24	0.26
K	CASTINGS		Vc (m/min)									
1.1-1.2	grey cast iron	<1000	150	0.11	0.13	0.15	0.17	0.21	0.23	0.26	0.28	0.3
M	STAINLESS STEEL		Vc (m/min)									
1.1	ferritic/martensitic	<850	110	0.065	0.08	0.09	0.11	0.13	0.15	0.17	0.19	0.2
2.1	austenitic	<650	90	0.06	0.07	0.08	0.1	0.12	0.13	0.14	0.16	0.18
2.2	austenitic	<750	80	0.06	0.07	0.08	0.1	0.12	0.13	0.14	0.16	0.18
3.1	DUPLEX STEEL super austenitic	<1100	80	0.05	0.058	0.067	0.09	0.11	0.12	0.13	0.145	0.16
N	NON-FERROUS		Vc (m/min)									
1.1-2.3	ALUMINIUM alloyed/cast	<600	250	0.15	0.16	0.18	0.2	0.21	0.23	0.26	0.3	0.32
3.1-3.3	COPPER alloyed	<600	180	0.07	0.085	0.095	0.125	0.145	0.16	0.175	0.19	0.22
T	TITANIUM		Vc (m/min)									
2.1-2.2	pure/alloyed	<1000	35	0.06	0.07	0.08	0.1	0.11	0.12	0.13	0.15	0.16
S	SUPER ALLOYS		Vc (m/min)									
1.1-1.3	HRSA	<1450	20	0.03	0.05	0.065	0.08	0.1	0.12	0.13	0.14	0.15
ADVICE The values marked in turquoise are side applications! Use maximum IC pressure. When using air cooling, please only use air through the spindle. Air cooling is only suitable to a limited extent, meaning that the tool needs some time to cool down after a certain number of holes have been drilled.												

DO YOU HAVE BLUNT
MILLING CUTTERS
THAT URGENTLY NEED
REGRINDING?



➔ DISCOVER OUR H&V
REGRINDING SERVICE

... and have your tools reconditioned to their
original state!



Cooling



Tolerance

h7

Coating

BetaUni Iron

Strategy

UNI

HPC

Application



Features

HA

5xD

140°

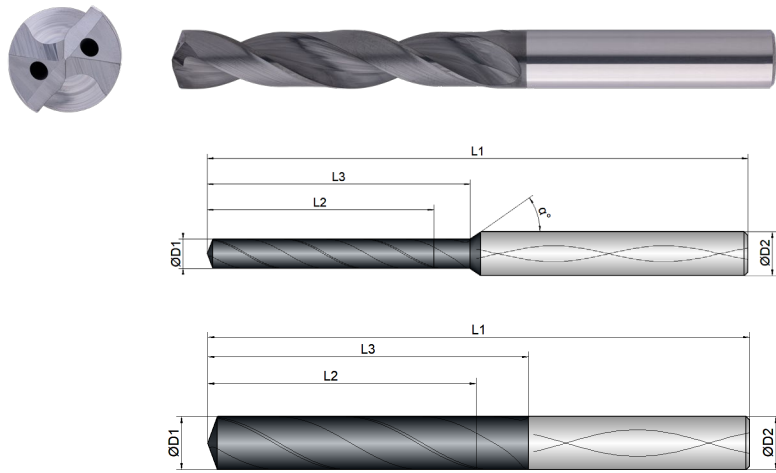







Basic



- Versatile universal geometry
 - Double-guided chip space for ideal chip evacuation
 - Polished surfaces for minimised frictional resistance
- Specially curved face cutting edge for higher feed rates and secure centring



BCU1-D01-0223	 mm ø	 mm	 mm	 mm ø	 mm
2,5	2.5	19	22	4	57
2,6	2.6	19	22	4	57
2,7	2.7	19	22	4	57
2,8	2.8	19	22	4	57
2,9	2.9	19	22	4	57
3	3	24	28	6	66
3,1	3.1	24	28	6	66
1/8	3.175 (1/8 ")	24	28	6	66
3,2	3.2	24	28	6	66
3,25	3.25	24	28	6	66
3,3	3.3	24	28	6	66
3,4	3.4	24	28	6	66
3,5	3.5	24	28	6	66
3,6	3.6	24	28	6	66
3,7	3.7	24	28	6	66
3,75	3.75	24	28	6	66

BCU1-D01-0223	 mm ø	 mm	 mm	 mm ø	 mm
3,8	3.8	31	36	6	74
3,9	3.9	31	36	6	74
5/32	3.96875 (5/32 ")	31	36	6	74
4	4	31	36	6	74
4,1	4.1	31	36	6	74
4,2	4.2	31	36	6	74
4,3	4.3	31	36	6	74
4,4	4.4	31	36	6	74
4,5	4.5	31	36	6	74
4,6	4.6	31	36	6	74
4,65	4.65	31	36	6	74
4,7	4.7	31	36	6	74
4,75	4.75	31	36	6	74
3/16	4.7625 (3/16 ")	38	44	6	82
4,8	4.8	38	44	6	82
4,9	4.9	38	44	6	82
5	5	38	44	6	82
5,1	5.1	38	44	6	82
5,2	5.2	38	44	6	82
5,3	5.3	38	44	6	82
5,4	5.4	38	44	6	82
5,5	5.5	38	44	6	82
5,55	5.55	38	44	6	82
7/32	5.55625 (7/32 ")	38	44	6	82
5,6	5.6	38	44	6	82
5,65	5.65	38	44	6	82
5,7	5.7	38	44	6	82
5,75	5.75	38	44	6	82
5,8	5.8	38	44	6	82

BCU1-D01-0223	D1	L2	L3	D2	L1
	 mm ø	 mm	 mm	 mm ø	 mm
5,9	5.9	38	44	6	82
6	6	38	44	6	82
6,1	6.1	45	53	8	91
6,2	6.2	45	53	8	91
6,3	6.3	45	53	8	91
6,35	6.35	45	53	8	91
6,4	6.4	45	53	8	91
6,5	6.5	45	53	8	91
6,55	6.55	45	53	8	91
6,6	6.6	45	53	8	91
6,65	6.65	45	53	8	91
6,7	6.7	45	53	8	91
6,8	6.8	45	53	8	91
6,9	6.9	45	53	8	91
7	7	45	53	8	91
7,1	7.1	45	53	8	91
9/32	7.14375 (9/32 ")	45	53	8	91
7,2	7.2	45	53	8	91
7,3	7.3	45	53	8	91
7,4	7.4	45	53	8	91
7,45	7.45	45	53	8	91
7,5	7.5	45	53	8	91
7,6	7.6	45	53	8	91
7,65	7.65	45	53	8	91
7,7	7.7	45	53	8	91
7,8	7.8	45	53	8	91
7,9	7.9	45	53	8	91
5/16	7.9375 (5/16 ")	45	53	8	91
8	8	45	53	8	91

BCU1-D01-0223	D1	L2	L3	D2	L1
	 mm ø	 mm	 mm	 mm ø	 mm
8,1	8.1	51	61	10	103
8,2	8.2	51	61	10	103
8,3	8.3	51	61	10	103
8,4	8.4	51	61	10	103
8,5	8.5	51	61	10	103
8,6	8.6	51	61	10	103
8,7	8.7	51	61	10	103
11/32	8.73125 (11/32 ")	51	61	10	103
8,8	8.8	51	61	10	103
8,9	8.9	51	61	10	103
9	9	51	61	10	103
9,1	9.1	51	61	10	103
9,2	9.2	51	61	10	103
9,3	9.3	51	61	10	103
9,35	9.35	51	61	10	103
9,4	9.4	51	61	10	103
9,5	9.5	51	61	10	103
3/8	9.525 (3/8 ")	51	61	10	103
9,6	9.6	51	61	10	103
9,65	9.65	51	61	10	103
9,7	9.7	51	61	10	103
9,8	9.8	51	61	10	103
9,9	9.9	51	61	10	103
10	10	51	61	10	103
10,1	10.1	58	71	12	118
10,2	10.2	58	71	12	118
10,3	10.3	58	71	12	118
13/32	10.3187 (13/32 ")	58	71	12	118
10,4	10.4	58	71	12	118

BCU1-D01-0223	D1	L2	L3	D2	L1
10,5	10.5	58	71	12	118
10,6	10.6	58	71	12	118
10,7	10.7	58	71	12	118
10,8	10.8	58	71	12	118
10,9	10.9	58	71	12	118
11	11	58	71	12	118
11,1	11.1	58	71	12	118
7/16	11.1125 (7/16 ")	58	71	12	118
11,2	11.2	58	71	12	118
11,3	11.3	58	71	12	118
11,4	11.4	58	71	12	118
11,5	11.5	58	71	12	118
11,6	11.6	58	71	12	118
11,7	11.7	58	71	12	118
11,8	11.8	58	71	12	118
11,9	11.9	58	71	12	118
12	12	58	71	12	118
12,2	12.2	62	77	14	124
12,5	12.5	62	77	14	124
12,7	12.7	62	77	14	124
12,8	12.8	62	77	14	124
13	13	62	77	14	124
13,1	13.1	62	77	14	124
13,2	13.2	62	77	14	124
13,5	13.5	62	77	14	124
13,8	13.8	62	77	14	124
14	14	62	77	14	124



Download Catalog Pages (PDF)

Dimension		Ø2,5 - Ø3	Ø3,1 - Ø4	Ø4,1 - Ø5	Ø5,1 - Ø6	Ø6,1 - Ø7,5	Ø7,6 - Ø9	Ø9,1 - Ø10,5	Ø10,6 - Ø12	Ø12,2 - Ø14
Depth (mm)		L2	L2	L2	L2	L2	L2	L2	L2	L2
Application										
Material	Strength (N/mm²)	Feed (mm/r)	fu	fu	fu	fu	fu	fu	fu	fu
P		STEEL	Vc (m/min)							
1.1	unalloyed	<500	190	0.095	0.115	0.14	0.16	0.2	0.22	0.25
1.2-1.5	unalloyed	<1100	170	0.09	0.11	0.13	0.15	0.19	0.21	0.24
2.1-2.2	low alloyed	<950	130	0.09	0.11	0.13	0.15	0.19	0.21	0.24
2.3-2.4	low alloyed	<1300	90	0.085	0.1	0.12	0.14	0.18	0.2	0.23
3.1-3.2	high alloyed	<1100	110	0.085	0.1	0.12	0.14	0.18	0.2	0.23
3.3	high alloyed	<1400	85	0.075	0.09	0.11	0.13	0.17	0.19	0.22
K		CASTINGS	Vc (m/min)							
1.1-1.2	grey cast iron	<1000	150	0.11	0.13	0.15	0.17	0.21	0.23	0.26
M		STAINLESS STEEL	Vc (m/min)							
1.1	ferritic/martensitic	<850	110	0.065	0.08	0.09	0.11	0.13	0.15	0.17
2.1	austenitic	<650	90	0.06	0.07	0.08	0.1	0.12	0.13	0.14
2.2	austenitic	<750	80	0.06	0.07	0.08	0.1	0.12	0.13	0.14
3.1	DUPLEX STEEL super austenitic	<1100	80	0.05	0.058	0.067	0.09	0.11	0.12	0.13
N		NON-FERROUS	Vc (m/min)							
1.1-2.3	ALUMINIUM alloyed/cast	<600	250	0.15	0.16	0.18	0.2	0.21	0.23	0.26
3.1-3.3	COPPER alloyed	<600	180	0.07	0.085	0.095	0.125	0.145	0.16	0.175
T		TITANIUM	Vc (m/min)							
2.1-2.2	pure/alloyed	<1000	35	0.06	0.07	0.08	0.1	0.11	0.12	0.13
S		SUPER ALLOYS	Vc (m/min)							
1.1-1.3	HRSA	<1450	20	0.03	0.05	0.065	0.08	0.1	0.12	0.13
ADVICE The values marked in turquoise are side applications! Use maximum IC pressure. When using air cooling, please only use air through the spindle. Air cooling is only suitable to a limited extent, meaning that the tool needs some time to cool down after a certain number of holes have been drilled.										

Cooling

Tolerance

h7

Coating

BetaUni Iron

Strategy

UNI

HPC

Application

Features

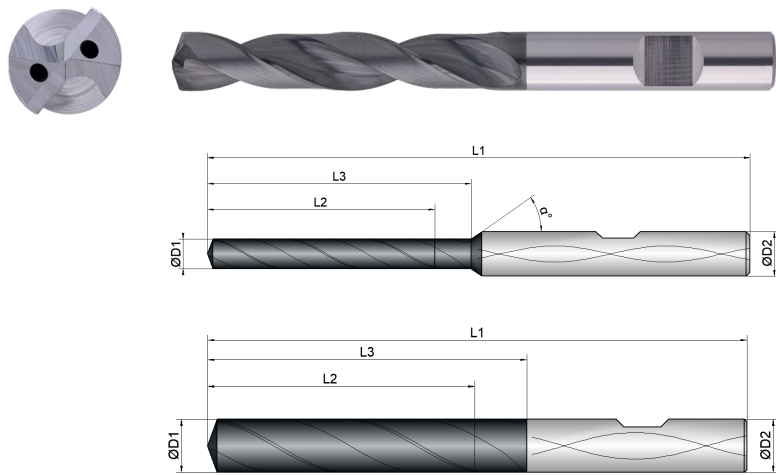
HB

5xD

140°

Basic

- Versatile universal geometry
 - Double-guided chip space for ideal chip evacuation
 - Polished surfaces for minimised frictional resistance
- Specially curved face cutting edge for higher feed rates and secure centring



BCU1-D01-0224					
3	3	24	28	6	66
3,1	3.1	24	28	6	66
1/8	3.175 (1/8 ")	24	28	6	66
3,2	3.2	24	28	6	66
3,25	3.25	24	28	6	66
3,3	3.3	24	28	6	66
3,4	3.4	24	28	6	66
3,5	3.5	24	28	6	66
3,6	3.6	24	28	6	66
3,7	3.7	24	28	6	66
3,75	3.75	24	28	6	66
3,8	3.8	31	36	6	74
3,9	3.9	31	36	6	74
5/32	3.96875 (5/32 ")	31	36	6	74
4	4	31	36	6	74
4,1	4.1	31	36	6	74

BCU1-D01-0224					
4,2	4.2	31	36	6	74
4,3	4.3	31	36	6	74
4,4	4.4	31	36	6	74
4,5	4.5	31	36	6	74
4,6	4.6	31	36	6	74
4,65	4.65	31	36	6	74
4,7	4.7	31	36	6	74
4,75	4.75	31	36	6	74
3/16	4.7625 (3/16 ")	38	44	6	82
4,8	4.8	38	44	6	82
4,9	4.9	38	44	6	82
5	5	38	44	6	82
5,1	5.1	38	44	6	82
5,2	5.2	38	44	6	82
5,3	5.3	38	44	6	82
5,4	5.4	38	44	6	82
5,5	5.5	38	44	6	82
5,55	5.55	38	44	6	82
7/32	5.55625 (7/32 ")	38	44	6	82
5,6	5.6	38	44	6	82
5,65	5.65	38	44	6	82
5,7	5.7	38	44	6	82
5,75	5.75	38	44	6	82
5,8	5.8	38	44	6	82
5,9	5.9	38	44	6	82
6	6	38	44	6	82
6,1	6.1	45	53	8	91
6,2	6.2	45	53	8	91
6,3	6.3	45	53	8	91

BCU1-D01-0224	D1	L2	L3	D2	L1
	 mm ø	 mm	 mm	 mm ø	 mm
6,35	6.35	45	53	8	91
6,4	6.4	45	53	8	91
6,5	6.5	45	53	8	91
6,55	6.55	45	53	8	91
6,6	6.6	45	53	8	91
6,65	6.65	45	53	8	91
6,7	6.7	45	53	8	91
6,8	6.8	45	53	8	91
6,9	6.9	45	53	8	91
7	7	45	53	8	91
7,1	7.1	45	53	8	91
9/32	7.14375 (9/32 ")	45	53	8	91
7,2	7.2	45	53	8	91
7,3	7.3	45	53	8	91
7,4	7.4	45	53	8	91
7,45	7.45	45	53	8	91
7,5	7.5	45	53	8	91
7,6	7.6	45	53	8	91
7,65	7.65	45	53	8	91
7,7	7.7	45	53	8	91
7,8	7.8	45	53	8	91
7,9	7.9	45	53	8	91
5/16	7.9375 (5/16 ")	45	53	8	91
8	8	45	53	8	91
8,1	8.1	51	61	10	103
8,2	8.2	51	61	10	103
8,3	8.3	51	61	10	103
8,4	8.4	51	61	10	103
8,5	8.5	51	61	10	103

BCU1-D01-0224	D1	L2	L3	D2	L1
	 mm ø	 mm	 mm	 mm ø	 mm
8,6	8.6	51	61	10	103
8,7	8.7	51	61	10	103
11/32	8.73125 (11/32 ")	51	61	10	103
8,8	8.8	51	61	10	103
8,9	8.9	51	61	10	103
9	9	51	61	10	103
9,1	9.1	51	61	10	103
9,2	9.2	51	61	10	103
9,3	9.3	51	61	10	103
9,35	9.35	51	61	10	103
9,4	9.4	51	61	10	103
9,5	9.5	51	61	10	103
3/8	9.525 (3/8 ")	51	61	10	103
9,6	9.6	51	61	10	103
9,65	9.65	51	61	10	103
9,7	9.7	51	61	10	103
9,8	9.8	51	61	10	103
9,9	9.9	51	61	10	103
10	10	51	61	10	103
10,1	10.1	58	71	12	118
10,2	10.2	58	71	12	118
10,3	10.3	58	71	12	118
13/32	10.3187 (13/32 ")	58	71	12	118
10,4	10.4	58	71	12	118
10,5	10.5	58	71	12	118
10,6	10.6	58	71	12	118
10,7	10.7	58	71	12	118
10,8	10.8	58	71	12	118
10,9	10.9	58	71	12	118

BCU1-D01-0224	D1	L2	L3	D2	L1
11	11	58	71	12	118
11,1	11.1	58	71	12	118
7/16	11.1125 (7/16 ")	58	71	12	118
11,2	11.2	58	71	12	118
11,3	11.3	58	71	12	118
11,4	11.4	58	71	12	118
11,5	11.5	58	71	12	118
11,6	11.6	58	71	12	118
11,7	11.7	58	71	12	118
11,8	11.8	58	71	12	118
11,9	11.9	58	71	12	118
12	12	58	71	12	118
12,2	12.2	62	77	14	124
12,5	12.5	62	77	14	124
12,7	12.7	62	77	14	124
12,8	12.8	62	77	14	124
13	13	62	77	14	124
13,1	13.1	62	77	14	124
13,2	13.2	62	77	14	124
13,5	13.5	62	77	14	124
13,8	13.8	62	77	14	124
14	14	62	77	14	124

Dimension		Ø2,5 - Ø3	Ø3,1 - Ø4	Ø4,1 - Ø5	Ø5,1 - Ø6	Ø6,1 - Ø7,5	Ø7,6 - Ø9	Ø9,1 - Ø10,5	Ø10,6 - Ø12	Ø12,2 - Ø14
Depth (mm)		L2	L2	L2	L2	L2	L2	L2	L2	L2
Application										
Material	Strength (N/mm²)	Feed (mm/r)	fu	fu	fu	fu	fu	fu	fu	fu
P	STEEL	Vc (m/min)								
1.1	unalloyed	<500	190	0.095	0.115	0.14	0.16	0.2	0.22	0.25
1.2-1.5	unalloyed	<1100	170	0.09	0.11	0.13	0.15	0.19	0.21	0.24
2.1-2.2	low alloyed	<950	130	0.09	0.11	0.13	0.15	0.19	0.21	0.24
2.3-2.4	low alloyed	<1300	90	0.085	0.1	0.12	0.14	0.18	0.2	0.23
3.1-3.2	high alloyed	<1100	110	0.085	0.1	0.12	0.14	0.18	0.2	0.23
3.3	high alloyed	<1400	85	0.075	0.09	0.11	0.13	0.17	0.19	0.22
K	CASTINGS	Vc (m/min)								
1.1-1.2	grey cast iron	<1000	150	0.11	0.13	0.15	0.17	0.21	0.23	0.26
M	STAINLESS STEEL	Vc (m/min)								
1.1	ferritic/martensitic	<850	110	0.065	0.08	0.09	0.11	0.13	0.15	0.17
2.1	austenitic	<650	90	0.06	0.07	0.08	0.1	0.12	0.13	0.14
2.2	austenitic	<750	80	0.06	0.07	0.08	0.1	0.12	0.13	0.14
3.1	DUPLEX STEEL super austenitic	<1100	80	0.05	0.058	0.067	0.09	0.11	0.12	0.13
N	NON-FERROUS	Vc (m/min)								
1.1-2.3	ALUMINIUM alloyed/cast	<600	250	0.15	0.16	0.18	0.2	0.21	0.23	0.26
3.1-3.3	COPPER alloyed	<600	180	0.07	0.085	0.095	0.125	0.145	0.16	0.175
T	TITANIUM	Vc (m/min)								
2.1-2.2	pure/alloyed	<1000	35	0.06	0.07	0.08	0.1	0.11	0.12	0.13
S	SUPER ALLOYS	Vc (m/min)								
1.1-1.3	HRSA	<1450	20	0.03	0.05	0.065	0.08	0.1	0.12	0.13
ADVICE The values marked in turquoise are side applications! Use maximum IC pressure. When using air cooling, please only use air through the spindle. Air cooling is only suitable to a limited extent, meaning that the tool needs some time to cool down after a certain number of holes have been drilled.										

Cooling

Toleranceh7

CoatingBetaUni Iron

Strategy

UNI

HPC

Application

Features

HE

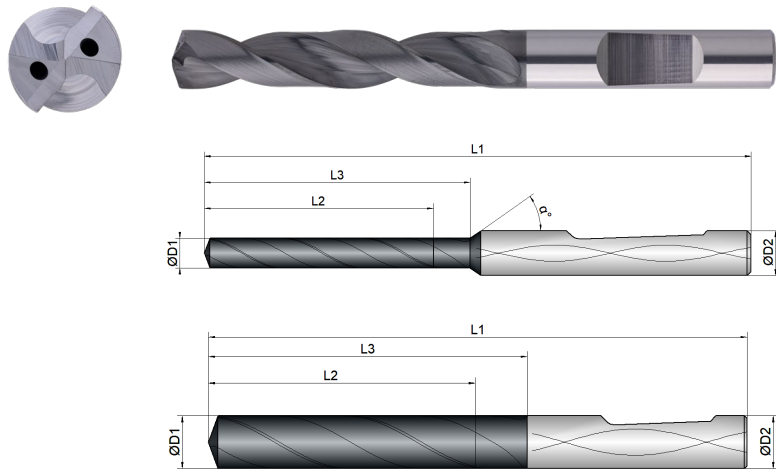
5xD


140°





Basic

- Versatile universal geometry
- Double-guided chip space for ideal chip evacuation
- Polished surfaces for minimised frictional resistance

 Specially curved face cutting edge for higher feed rates and secure centring Increased delivery time due to warehouse rework (HE)

BCU1-D01-0225	D1 mm ø	L2 mm	L3 mm	D2 mm ø	L1 mm
(3)	3	24	28	6	66
(3,1)	3.1	24	28	6	66
(1/8)	3.175 (1/8 ")	24	28	6	66
(3,2)	3.2	24	28	6	66
(3,25)	3.25	24	28	6	66
(3,3)	3.3	24	28	6	66
(3,4)	3.4	24	28	6	66
(3,5)	3.5	24	28	6	66
(3,6)	3.6	24	28	6	66
(3,7)	3.7	24	28	6	66
(3,75)	3.75	24	28	6	66
(3,8)	3.8	31	36	6	74
(3,9)	3.9	31	36	6	74
(5/32)	3.96875 (5/32 ")	31	36	6	74
(4)	4	31	36	6	74
(4,1)	4.1	31	36	6	74

	D1 mm ø	L2 mm	L3 mm	D2 mm ø	L1 mm
BCU1-D01-0225					
(4,2)	4.2	31	36	6	74
(4,3)	4.3	31	36	6	74
(4,4)	4.4	31	36	6	74
(4,5)	4.5	31	36	6	74
(4,6)	4.6	31	36	6	74
(4,65)	4.65	31	36	6	74
(4,7)	4.7	31	36	6	74
(4,75)	4.75	31	36	6	74
(3/16)	4.7625 (3/16 ")	38	44	6	82
(4,8)	4.8	38	44	6	82
(4,9)	4.9	38	44	6	82
(5)	5	38	44	6	82
(5,1)	5.1	38	44	6	82
(5,2)	5.2	38	44	6	82
(5,3)	5.3	38	44	6	82
(5,4)	5.4	38	44	6	82
(5,5)	5.5	38	44	6	82
(5,55)	5.55	38	44	6	82
(7/32)	5.5625 (7/32 ")	38	44	6	82
(5,6)	5.6	38	44	6	82
(5,65)	5.65	38	44	6	82
(5,7)	5.7	38	44	6	82
(5,75)	5.75	38	44	6	82
(5,8)	5.8	38	44	6	82
(5,9)	5.9	38	44	6	82
(6)	6	38	44	6	82
(6,1)	6.1	45	53	8	91
(6,2)	6.2	45	53	8	91
(6,3)	6.3	45	53	8	91

	D1  mm Ø	L2  mm	L3  mm	D2  mm Ø	L1  mm
(6,35)	6.35	45	53	8	91
(6,4)	6.4	45	53	8	91
(6,5)	6.5	45	53	8	91
(6,55)	6.55	45	53	8	91
(6,6)	6.6	45	53	8	91
(6,65)	6.65	45	53	8	91
(6,7)	6.7	45	53	8	91
(6,8)	6.8	45	53	8	91
(6,9)	6.9	45	53	8	91
(7)	7	45	53	8	91
(7,1)	7.1	45	53	8	91
(9/32)	7.14375 (9/32 ")	45	53	8	91
(7,2)	7.2	45	53	8	91
(7,3)	7.3	45	53	8	91
(7,4)	7.4	45	53	8	91
(7,45)	7.45	45	53	8	91
(7,5)	7.5	45	53	8	91
(7,6)	7.6	45	53	8	91
(7,65)	7.65	45	53	8	91
(7,7)	7.7	45	53	8	91
(7,8)	7.8	45	53	8	91
(7,9)	7.9	45	53	8	91
(5/16)	7.9375 (5/16 ")	45	53	8	91
(8)	8	45	53	8	91
(8,1)	8.1	51	61	10	103
(8,2)	8.2	51	61	10	103
(8,3)	8.3	51	61	10	103
(8,4)	8.4	51	61	10	103
(8,5)	8.5	51	61	10	103

	D1  mm Ø	L2  mm	L3  mm	D2  mm Ø	L1  mm
(8,6)	8.6	51	61	10	103
(8,7)	8.7	51	61	10	103
(11/32)	8.73125 (11/32 ")	51	61	10	103
(8,8)	8.8	51	61	10	103
(8,9)	8.9	51	61	10	103
(9)	9	51	61	10	103
(9,1)	9.1	51	61	10	103
(9,2)	9.2	51	61	10	103
(9,3)	9.3	51	61	10	103
(9,35)	9.35	51	61	10	103
(9,4)	9.4	51	61	10	103
(9,5)	9.5	51	61	10	103
(3/8)	9.525 (3/8 ")	51	61	10	103
(9,6)	9.6	51	61	10	103
(9,65)	9.65	51	61	10	103
(9,7)	9.7	51	61	10	103
(9,8)	9.8	51	61	10	103
(9,9)	9.9	51	61	10	103
(10)	10	51	61	10	103
(10,1)	10.1	58	71	12	118
(10,2)	10.2	58	71	12	118
(10,3)	10.3	58	71	12	118
(13/32)	10.3187 (13/32 ")	58	71	12	118
(10,4)	10.4	58	71	12	118
(10,5)	10.5	58	71	12	118
(10,6)	10.6	58	71	12	118
(10,7)	10.7	58	71	12	118
(10,8)	10.8	58	71	12	118
(10,9)	10.9	58	71	12	118

BCU1-D01-0225	D1	L2	L3	D2	L1
(11)	11	58	71	12	118
(11,1)	11.1	58	71	12	118
(7/16)	11.1125 (7/16 ")	58	71	12	118
(11,2)	11.2	58	71	12	118
(11,3)	11.3	58	71	12	118
(11,4)	11.4	58	71	12	118
(11,5)	11.5	58	71	12	118
(11,6)	11.6	58	71	12	118
(11,7)	11.7	58	71	12	118
(11,8)	11.8	58	71	12	118
(11,9)	11.9	58	71	12	118
(12)	12	58	71	12	118
(12,2)	12.2	62	77	14	124
(12,5)	12.5	62	77	14	124
(12,7)	12.7	62	77	14	124
(12,8)	12.8	62	77	14	124
(13)	13	62	77	14	124
(13,1)	13.1	62	77	14	124
(13,2)	13.2	62	77	14	124
(13,5)	13.5	62	77	14	124
(13,8)	13.8	62	77	14	124
(14)	14	62	77	14	124




Download Catalog Pages (PDF)


	Material	Strength (N/mm²)	Feed (mm/r)	Dimension	Ø2,5 - Ø3	Ø3,1 - Ø4	Ø4,1 - Ø5	Ø5,1 - Ø6	Ø6,1 - Ø7,5	Ø7,6 - Ø9	Ø9,1 - Ø10,5	Ø10,6 - Ø12	Ø12,2 - Ø14
				Depth (mm)	L2	L2	L2	L2	L2	L2	L2	L2	L2
				Application									
					fu	fu	fu	fu	fu	fu	fu	fu	fu
P	STEEL		Vc (m/min)										
1.1	unalloyed	<500	190		0.095	0.115	0.14	0.16	0.2	0.22	0.25	0.27	0.29
1.2-1.5	unalloyed	<1100	170		0.09	0.11	0.13	0.15	0.19	0.21	0.24	0.27	0.28
2.1-2.2	low alloyed	<950	130		0.09	0.11	0.13	0.15	0.19	0.21	0.24	0.27	0.28
2.3-2.4	low alloyed	<1300	90		0.085	0.1	0.12	0.14	0.18	0.2	0.23	0.25	0.27
3.1-3.2	high alloyed	<1100	110		0.085	0.1	0.12	0.14	0.18	0.2	0.23	0.25	0.27
3.3	high alloyed	<1400	85		0.075	0.09	0.11	0.13	0.17	0.19	0.22	0.24	0.26
K	CASTINGS		Vc (m/min)										
1.1-1.2	grey cast iron	<1000	150		0.11	0.13	0.15	0.17	0.21	0.23	0.26	0.28	0.3
M	STAINLESS STEEL		Vc (m/min)										
1.1	ferritic/martensitic	<850	110		0.065	0.08	0.09	0.11	0.13	0.15	0.17	0.19	0.2
2.1	austenitic	<650	90		0.06	0.07	0.08	0.1	0.12	0.13	0.14	0.16	0.18
2.2	austenitic	<750	80		0.06	0.07	0.08	0.1	0.12	0.13	0.14	0.16	0.18
3.1	DUPLEX STEEL super austenitic	<1100	80		0.05	0.058	0.067	0.09	0.11	0.12	0.13	0.145	0.16
N	NON-FERROUS		Vc (m/min)										
1.1-2.3	ALUMINIUM alloyed/cast	<600	250		0.15	0.16	0.18	0.2	0.21	0.23	0.26	0.3	0.32
3.1-3.3	COPPER alloyed	<600	180		0.07	0.085	0.095	0.125	0.145	0.16	0.175	0.19	0.22
T	TITANIUM		Vc (m/min)										
2.1-2.2	pure/alloyed	<1000	35		0.06	0.07	0.08	0.1	0.11	0.12	0.13	0.15	0.16
S	SUPER ALLOYS		Vc (m/min)										
1.1-1.3	HRSA	<1450	20		0.03	0.05	0.065	0.08	0.1	0.12	0.13	0.14	0.15
ADVICE The values marked in turquoise are side applications! Use maximum IC pressure. When using air cooling, please only use air through the spindle. Air cooling is only suitable to a limited extent, meaning that the tool needs some time to cool down after a certain number of holes have been drilled.													


Cooling	
Tolerance	h7
Coating	BetaUni Iron

Strategy	UNI	HPC	
Application			Basic
Features	HA	8xD	 

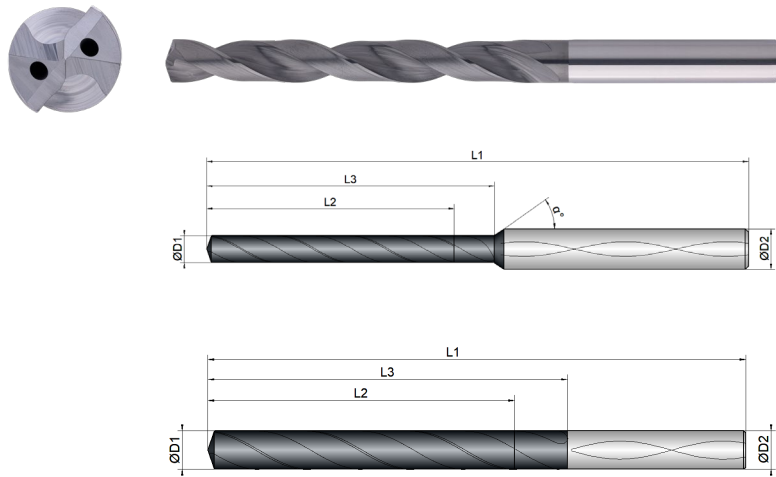- Versatile universal geometry
 - Double-guided chip space for ideal chip evacuation
 - Polished surfaces for minimised frictional resistance
- Specially curved face cutting edge for higher feed rates and secure centring



BCU1-D01-0233	 mm ø	 mm	 mm	 mm ø	 mm
3	3	30	34	6	72
3,1	3.1	30	34	6	72
1/8	3.175 (1/8 ")	30	34	6	72
3,2	3.2	30	34	6	72
3,3	3.3	30	34	6	72
3,4	3.4	30	34	6	72
3,5	3.5	30	34	6	72
3,6	3.6	30	34	6	72
3,7	3.7	30	34	6	72
3,8	3.8	37	43	6	81
3,9	3.9	37	43	6	81
5/32	3.96875 (5/32 ")	37	43	6	81
4	4	37	43	6	81
4,1	4.1	37	43	6	81
4,2	4.2	37	43	6	81
4,3	4.3	37	43	6	81

BCU1-D01-0233	 mm ø	 mm	 mm	 mm ø	 mm
4,4	4.4	37	43	6	81
4,5	4.5	37	43	6	81
4,6	4.6	37	43	6	81
4,7	4.7	37	43	6	81
3/16	4.7625 (3/16 ")	49	57	6	95
4,8	4.8	49	57	6	95
4,9	4.9	49	57	6	95
5	5	49	57	6	95
5,1	5.1	49	57	6	95
5,2	5.2	49	57	6	95
5,3	5.3	49	57	6	95
5,4	5.4	49	57	6	95
5,5	5.5	49	57	6	95
7/32	5.5625 (7/32 ")	49	57	6	95
5,6	5.6	49	57	6	95
5,7	5.7	49	57	6	95
5,8	5.8	49	57	6	95
5,9	5.9	49	57	6	95
6	6	49	57	6	95
6,1	6.1	65	76	8	114
6,2	6.2	65	76	8	114
6,3	6.3	65	76	8	114
6,35	6.35	65	76	8	114
6,4	6.4	65	76	8	114
6,5	6.5	65	76	8	114
6,6	6.6	65	76	8	114
6,7	6.7	65	76	8	114
6,8	6.8	65	76	8	114
6,9	6.9	65	76	8	114

	D1	L2	L3	D2	L1
BCU1-D01-0233					
7	7	65	76	8	114
7,1	7.1	65	76	8	114
9/32	7.14375 (9/32 ")	65	76	8	114
7,2	7.2	65	76	8	114
7,3	7.3	65	76	8	114
7,4	7.4	65	76	8	114
7,5	7.5	65	76	8	114
7,6	7.6	65	76	8	114
7,7	7.7	65	76	8	114
7,8	7.8	65	76	8	114
7,9	7.9	65	76	8	114
5/16	7.9375 (5/16 ")	65	76	8	114
8	8	67	76	8	114
8,1	8.1	81	95	10	142
8,2	8.2	81	95	10	142
8,3	8.3	81	95	10	142
8,4	8.4	81	95	10	142
8,5	8.5	81	95	10	142
8,6	8.6	81	95	10	142
8,7	8.7	81	95	10	142
11/32	8.73125 (11/32 ")	81	95	10	142
8,8	8.8	81	95	10	142
8,9	8.9	81	95	10	142
9	9	81	95	10	142
9,1	9.1	81	95	10	142
9,2	9.2	81	95	10	142
9,3	9.3	81	95	10	142
9,4	9.4	81	95	10	142
9,5	9.5	81	95	10	142

	D1	L2	L3	D2	L1
BCU1-D01-0233					
9,6	9.6	81	95	10	142
9,7	9.7	81	95	10	142
9,8	9.8	81	95	10	142
9,9	9.9	81	95	10	142
10	10	81	95	10	142
10,1	10.1	97	114	12	162
10,2	10.2	97	114	12	162
10,3	10.3	97	114	12	162
13/32	10.3187 (13/32 ")	97	114	12	162
10,4	10.4	97	114	12	162
10,5	10.5	97	114	12	162
10,8	10.8	97	114	12	162
11	11	97	114	12	162
7/16	11.1125 (7/16 ")	97	114	12	162
11,2	11.2	97	114	12	162
11,3	11.3	97	114	12	162
11,4	11.4	97	114	12	162
11,5	11.5	97	114	12	162
11,7	11.7	97	114	12	162
11,8	11.8	97	114	12	162
12	12	97	114	12	162
12,2	12.2	113	133	14	178
12,5	12.5	113	133	14	178
12,7	12.7	113	133	14	178
12,8	12.8	113	133	14	178
13	13	113	133	14	178
13,5	13.5	113	133	14	178
13,8	13.8	113	133	14	178
14	14	113	133	14	178



Download Catalog
Pages (PDF)

			Dimension	Ø3 - Ø4	Ø4.1 - Ø5	Ø5.1 - Ø6	Ø6.1 - Ø7.5	Ø7.6 - Ø9	Ø9.1 - Ø10.5	Ø10.6 - Ø12	Ø12.2 - Ø14
			Depth (mm)	L2	L2	L2	L2	L2	L2	L2	L2
			Application								
			Feed (mm/r)	fu	fu	fu	fu	fu	fu	fu	fu
			Strength (N/mm²)								
			Material								
P	STEEL		Vc (m/min)								
1.1	unalloyed	<500	115	0.09	0.11	0.13	0.15	0.18	0.2	0.22	0.24
1.2-1.5	unalloyed	<1100	110	0.085	0.105	0.125	0.14	0.17	0.19	0.21	0.23
2.1-2.2	low alloyed	<950	75	0.085	0.105	0.125	0.14	0.17	0.19	0.21	0.23
2.3-2.4	low alloyed	<1300	60	0.08	0.095	0.11	0.13	0.16	0.18	0.2	0.22
3.1-3.2	high alloyed	<1100	65	0.08	0.095	0.11	0.13	0.16	0.18	0.2	0.22
3.3	high alloyed	<1400	55	0.075	0.09	0.105	0.12	0.14	0.16	0.18	0.2
K	CASTINGS		Vc (m/min)								
1.1-1.2	grey cast iron	<1000	95	0.12	0.135	0.15	0.16	0.18	0.2	0.22	0.24
M	STAINLESS STEEL		Vc (m/min)								
1.1	ferritic/martensitic	<850	85	0.065	0.09	0.11	0.13	0.14	0.15	0.16	0.17
2.1	austenitic	<650	70	0.06	0.08	0.105	0.12	0.13	0.14	0.15	0.16
2.2	austenitic	<750	60	0.06	0.08	0.105	0.12	0.13	0.14	0.15	0.16
3.1	DUPLEX STEEL super austenitic	<1100	55	0.05	0.065	0.09	0.11	0.12	0.13	0.14	0.15
N	NON-FERROUS		Vc (m/min)								
1.1-2.3	ALUMINIUM alloyed/cast	<600	190	0.15	0.16	0.18	0.2	0.21	0.23	0.26	0.3
3.1-3.3	COPPER alloyed	<600	145	0.07	0.085	0.1	0.125	0.145	0.16	0.18	0.2
T	TITANIUM		Vc (m/min)								
2.1-2.2	pure/alloyed	<1000	35	0.06	0.085	0.1	0.11	0.12	0.13	0.14	0.15
S	SUPER ALLOYS		Vc (m/min)								
1.1-1.3	HRSA	<1450	20	0.03	0.05	0.075	0.1	0.11	0.12	0.13	0.14
ADVICE The values marked in turquoise are side applications! Use maximum IC pressure. When using air cooling, please only use air through the spindle. Air cooling is only suitable to a limited extent, meaning that the tool needs some time to cool down after a certain number of holes have been drilled.											



STILL CAN'T FIND A SUITABLE MILLING CUTTER?

No problem – simply customize an existing tool. Using our configurator for special milling cutters, you can customize existing tools to your needs in an instant or create your own tools based on predefined types.

WE WILL RESPOND TO ALL
REQUESTS SUBMITTED VIA THE
CONFIGURATOR WITHIN ONE
WORKING DAY AT THE LATEST




Cooling	
Tolerance	h7
Coating	BetaUni Iron


Strategy	UNI	HPC	
Application			
Features	HB	8xD	 



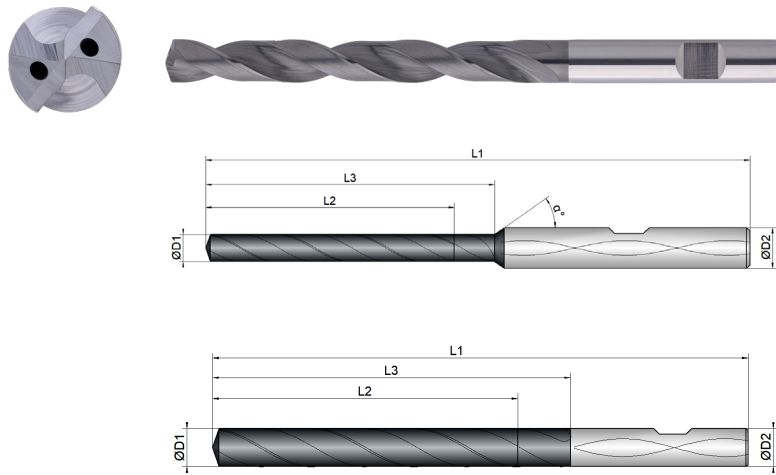- Versatile universal geometry
 - Double-guided chip space for ideal chip evacuation
 - Polished surfaces for minimised frictional resistance
- Specially curved face cutting edge for higher feed rates and secure centring



BCU1-D01-0234	 mm Ø	 mm	 mm	 mm Ø	 mm
3	3	30	34	6	72
3,1	3.1	30	34	6	72
1/8	11.1125 (7/16 ")	30	34	6	72
3,2	3.2	30	34	6	72
3,3	3.3	30	34	6	72
3,4	3.4	30	34	6	72
3,5	3.5	30	34	6	72
3,6	3.6	30	34	6	72
3,7	3.7	30	34	6	72
3,8	3.8	37	43	6	81
3,9	3.9	37	43	6	81
5/32	3.96875 (5/32 ")	37	43	6	81
4	4	37	43	6	81
4,1	4.1	37	43	6	81
4,2	4.2	37	43	6	81
4,3	4.3	37	43	6	81

BCU1-D01-0234	 mm Ø	 mm	 mm	 mm Ø	 mm
4,4	4.4	37	43	6	81
4,5	4.5	37	43	6	81
4,6	4.6	37	43	6	81
4,7	4.7	37	43	6	81
3/16	4.7625 (3/16 ")	49	57	6	95
4,8	4.8	49	57	6	95
4,9	4.9	49	57	6	95
5	5	49	57	6	95
5,1	5.1	49	57	6	95
5,2	5.2	49	57	6	95
5,3	5.3	49	57	6	95
5,4	5.4	49	57	6	95
5,5	5.5	49	57	6	95
7/32	5.5625 (7/32 ")	49	57	6	95
5,6	5.6	49	57	6	95
5,7	5.7	49	57	6	95
5,8	5.8	49	57	6	95
5,9	5.9	49	57	6	95
6	6	49	57	6	95
6,1	6.1	65	76	8	114
6,2	6.2	65	76	8	114
6,3	6.3	65	76	8	114
6,35	6.35	65	76	8	114
6,4	6.4	65	76	8	114
6,5	6.5	65	76	8	114
6,6	6.6	65	76	8	114
6,7	6.7	65	76	8	114
6,8	6.8	65	76	8	114
6,9	6.9	65	76	8	114

BCU1-D01-0234	D1	L2	L3	D2	L1
	 mm ø	 mm	 mm	 mm ø	 mm
7	7	65	76	8	114
7,1	7.1	65	76	8	114
9/32	7.14375 (9/32 ")	65	76	8	114
7,2	7.2	65	76	8	114
7,3	7.3	65	76	8	114
7,4	7.4	65	76	8	114
7,5	7.5	65	76	8	114
7,6	7.6	65	76	8	114
7,7	7.7	65	76	8	114
7,8	7.8	65	76	8	114
7,9	7.9	65	76	8	114
5/16	7.9375 (5/16 ")	65	76	8	114
8	8	67	76	8	114
8,1	8.1	81	95	10	142
8,2	8.2	81	95	10	142
8,3	8.3	81	95	10	142
8,4	8.4	81	95	10	142
8,5	8.5	81	95	10	142
8,6	8.6	81	95	10	142
8,7	8.7	81	95	10	142
11/32	8.73125 (11/32 ")	81	95	10	142
8,8	8.8	81	95	10	142
8,9	8.9	81	95	10	142
9	9	81	95	10	142
9,1	9.1	81	95	10	142
9,2	9.2	81	95	10	142
9,3	9.3	81	95	10	142
9,4	9.4	81	95	10	142
9,5	9.5	81	95	10	142

BCU1-D01-0234	D1	L2	L3	D2	L1
	 mm ø	 mm	 mm	 mm ø	 mm
9,6	9.6	81	95	10	142
9,7	9.7	81	95	10	142
9,8	9.8	81	95	10	142
9,9	9.9	81	95	10	142
10	10	81	95	10	142
10,1	10.1	97	114	12	162
10,2	10.2	97	114	12	162
10,3	10.3	97	114	12	162
13/32	10.3187 (13/32 ")	97	114	12	162
10,4	10.4	97	114	12	162
10,5	10.5	97	114	12	162
10,8	10.8	97	114	12	162
11	11	97	114	12	162
7/16	11.1125 (7/16 ")	97	114	12	162
11,2	11.2	97	114	12	162
11,3	11.3	97	114	12	162
11,4	11.4	97	114	12	162
11,5	11.5	97	114	12	162
11,7	11.7	97	114	12	162
11,8	11.8	97	114	12	162
12	12	97	114	12	162
12,2	12.2	113	133	14	178
12,5	12.5	113	133	14	178
12,7	12.7	113	133	14	178
12,8	12.8	113	133	14	178
13	13	113	133	14	178
13,5	13.5	113	133	14	178
13,8	13.8	113	133	14	178
14	14	113	133	14	178



Download Catalog
Pages (PDF)

			Dimension	Ø3 - Ø4	Ø4.1 - Ø5	Ø5.1 - Ø6	Ø6.1 - Ø7.5	Ø7.6 - Ø9	Ø9.1 - Ø10.5	Ø10.6 - Ø12	Ø12.2 - Ø14
			Depth (mm)	L2	L2	L2	L2	L2	L2	L2	L2
			Application								
Material	Strength (N/mm²)	Feed (mm/r)	fu								
P STEEL			Vc (m/min)								
1.1	unalloyed	<500	115	0.09	0.11	0.13	0.15	0.18	0.2	0.22	0.24
1.2-1.5	unalloyed	<1100	110	0.085	0.105	0.125	0.14	0.17	0.19	0.21	0.23
2.1-2.2	low alloyed	<950	75	0.085	0.105	0.125	0.14	0.17	0.19	0.21	0.23
2.3-2.4	low alloyed	<1300	60	0.08	0.095	0.11	0.13	0.16	0.18	0.2	0.22
3.1-3.2	high alloyed	<1100	65	0.08	0.095	0.11	0.13	0.16	0.18	0.2	0.22
3.3	high alloyed	<1400	55	0.075	0.09	0.105	0.12	0.14	0.16	0.18	0.2
K CASTINGS			Vc (m/min)								
1.1-1.2	grey cast iron	<1000	95	0.12	0.135	0.15	0.16	0.18	0.2	0.22	0.24
M STAINLESS STEEL			Vc (m/min)								
1.1	ferritic/martensitic	<850	85	0.065	0.09	0.11	0.13	0.14	0.15	0.16	0.17
2.1	austenitic	<650	70	0.06	0.08	0.105	0.12	0.13	0.14	0.15	0.16
2.2	austenitic	<750	60	0.06	0.08	0.105	0.12	0.13	0.14	0.15	0.16
3.1	DUPLEX STEEL super austenitic	<1100	55	0.05	0.065	0.09	0.11	0.12	0.13	0.14	0.15
N NON-FERROUS			Vc (m/min)								
1.1-2.3	ALUMINIUM alloyed/cast	<600	190	0.15	0.16	0.18	0.2	0.21	0.23	0.26	0.3
3.1-3.3	COPPER alloyed	<600	145	0.07	0.085	0.1	0.125	0.145	0.16	0.18	0.2
T TITANIUM			Vc (m/min)								
2.1-2.2	pure/alloyed	<1000	35	0.06	0.085	0.1	0.11	0.12	0.13	0.14	0.15
S SUPER ALLOYS			Vc (m/min)								
1.1-1.3	HRSA	<1450	20	0.03	0.05	0.075	0.1	0.11	0.12	0.13	0.14
ADVICE The values marked in turquoise are side applications! Use maximum IC pressure. When using air cooling, please only use air through the spindle. Air cooling is only suitable to a limited extent, meaning that the tool needs some time to cool down after a certain number of holes have been drilled.											

DO YOU HAVE BLUNT
MILLING CUTTERS
THAT URGENTLY NEED
REGRINDING?



➔ DISCOVER OUR H&V
REGRINDING SERVICE

... and have your tools reconditioned to their
original state!



Cooling

Toleranceh7

CoatingBetaUni Iron

Strategy

UNI

HPC

Application

Features

HE

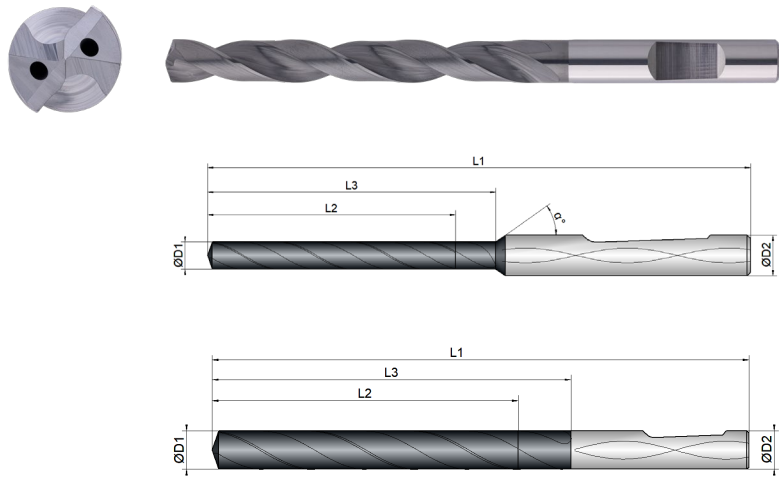
8xD



140°





Basic

- Versatile universal geometry
- Double-guided chip space for ideal chip evacuation
- Polished surfaces for minimised frictional resistance

 Specially curved face cutting edge for higher feed rates and secure centring Increased delivery time due to warehouse rework (HE)

BCU1-D01-0235	 mm ø	 mm	 mm	 mm ø	 mm
(3)	3	30	34	6	72
(3,1)	3.1	30	34	6	72
(1/8)	3.75 (1/8 ")	30	34	6	72
(3,2)	3.2	30	34	6	72
(3,3)	3.3	30	34	6	72
(3,4)	3.4	30	34	6	72
(3,5)	3.5	30	34	6	72
(3,6)	3.6	30	34	6	72
(3,7)	3.7	30	34	6	72
(3,8)	3.8	37	43	6	81
(3,9)	3.9	37	43	6	81
(5/32)	3.96875 (5/32 ")	37	43	6	81
(4)	4	37	43	6	81
(4,1)	4.1	37	43	6	81
(4,2)	4.2	37	43	6	81
(4,3)	4.3	37	43	6	81

BCU1-D01-0235	 mm ø	 mm	 mm	 mm ø	 mm
(4,4)	4.4	37	43	6	81
(4,5)	4.5	37	43	6	81
(4,6)	4.6	37	43	6	81
(4,7)	4.7	37	43	6	81
(3/16)	4.7625 (3/16 ")	49	57	6	95
(4,8)	4.8	49	57	6	95
(4,9)	4.9	49	57	6	95
(5)	5	49	57	6	95
(5,1)	5.1	49	57	6	95
(5,2)	5.2	49	57	6	95
(5,3)	5.3	49	57	6	95
(5,4)	5.4	49	57	6	95
(5,5)	5.5	49	57	6	95
(7/32)	5.55625 (7/32 ")	49	57	6	95
(5,6)	5.6	49	57	6	95
(5,7)	5.7	49	57	6	95
(5,8)	5.8	49	57	6	95
(5,9)	5.9	49	57	6	95
(6)	6	49	57	6	95
(6,1)	6.1	65	76	8	114
(6,2)	6.2	65	76	8	114
(6,3)	6.3	65	76	8	114
(6,35)	6.35	65	76	8	114
(6,4)	6.4	65	76	8	114
(6,5)	6.5	65	76	8	114
(6,6)	6.6	65	76	8	114
(6,7)	6.7	65	76	8	114
(6,8)	6.8	65	76	8	114
(6,9)	6.9	65	76	8	114

	D1	L2	L3	D2	L1
BCU1-D01-0235					
(7)	7	65	76	8	114
(7,1)	7.1	65	76	8	114
(9/32)	7.14375 (9/32 ")	65	76	8	114
(7,2)	7.2	65	76	8	114
(7,3)	7.3	65	76	8	114
(7,4)	7.4	65	76	8	114
(7,5)	7.5	65	76	8	114
(7,6)	7.6	65	76	8	114
(7,7)	7.7	65	76	8	114
(7,8)	7.8	65	76	8	114
(7,9)	7.9	65	76	8	114
(5/16)	7.9375 (5/16 ")	65	76	8	114
(8)	8	67	76	8	114
(8,1)	8.1	81	95	10	142
(8,2)	8.2	81	95	10	142
(8,3)	8.3	81	95	10	142
(8,4)	8.4	81	95	10	142
(8,5)	8.5	81	95	10	142
(8,6)	8.6	81	95	10	142
(8,7)	8.7	81	95	10	142
(11/32)	8.73125 (11/32 ")	81	95	10	142
(8,8)	8.8	81	95	10	142
(8,9)	8.9	81	95	10	142
(9)	9	81	95	10	142
(9,1)	9.1	81	95	10	142
(9,2)	9.2	81	95	10	142
(9,3)	9.3	81	95	10	142
(9,4)	9.4	81	95	10	142
(9,5)	9.5	81	95	10	142

	D1	L2	L3	D2	L1
BCU1-D01-0235					
(9,6)	9.6	81	95	10	142
(9,7)	9.7	81	95	10	142
(9,8)	9.8	81	95	10	142
(9,9)	9.9	81	95	10	142
(10)	10	81	95	10	142
(10,1)	10.1	97	114	12	162
(10,2)	10.2	97	114	12	162
(10,3)	10.3	97	114	12	162
(13/32)	10.3187 (13/32 ")	97	114	12	162
(10,4)	10.4	97	114	12	162
(10,5)	10.5	97	114	12	162
(10,8)	10.8	97	114	12	162
(11)	11	97	114	12	162
(7/16)	11.1125 (7/16 ")	97	114	12	162
(11,2)	11.2	97	114	12	162
(11,3)	11.3	97	114	12	162
(11,4)	11.4	97	114	12	162
(11,5)	11.5	97	114	12	162
(11,7)	11.7	97	114	12	162
(11,8)	11.8	97	114	12	162
(12)	12	97	114	12	162
(12,2)	12.2	113	133	14	178
(12,5)	12.5	113	133	14	178
(12,7)	12.7	113	133	14	178
(12,8)	12.8	113	133	14	178
(13)	13	113	133	14	178
(13,5)	13.5	113	133	14	178
(13,8)	13.8	113	133	14	178
(14)	14	113	133	14	178



Download Catalog
Pages (PDF)

			Dimension	Ø3 - Ø4	Ø4.1 - Ø5	Ø5.1 - Ø6	Ø6.1 - Ø7.5	Ø7.6 - Ø9	Ø9.1 - Ø10.5	Ø10.6 - Ø12	Ø12.2 - Ø14
			Depth (mm)	L2	L2	L2	L2	L2	L2	L2	L2
			Application								
			Feed (mm/r)	fu	fu	fu	fu	fu	fu	fu	fu
			Strength (N/mm²)								
			Material								
P	STEEL		Vc (m/min)								
1.1	unalloyed	<500	115	0.09	0.11	0.13	0.15	0.18	0.2	0.22	0.24
1.2-1.5	unalloyed	<1100	110	0.085	0.105	0.125	0.14	0.17	0.19	0.21	0.23
2.1-2.2	low alloyed	<950	75	0.085	0.105	0.125	0.14	0.17	0.19	0.21	0.23
2.3-2.4	low alloyed	<1300	60	0.08	0.095	0.11	0.13	0.16	0.18	0.2	0.22
3.1-3.2	high alloyed	<1100	65	0.08	0.095	0.11	0.13	0.16	0.18	0.2	0.22
3.3	high alloyed	<1400	55	0.075	0.09	0.105	0.12	0.14	0.16	0.18	0.2
K	CASTINGS		Vc (m/min)								
1.1-1.2	grey cast iron	<1000	95	0.12	0.135	0.15	0.16	0.18	0.2	0.22	0.24
M	STAINLESS STEEL		Vc (m/min)								
1.1	ferritic/martensitic	<850	85	0.065	0.09	0.11	0.13	0.14	0.15	0.16	0.17
2.1	austenitic	<650	70	0.06	0.08	0.105	0.12	0.13	0.14	0.15	0.16
2.2	austenitic	<750	60	0.06	0.08	0.105	0.12	0.13	0.14	0.15	0.16
3.1	DUPLEX STEEL super austenitic	<1100	55	0.05	0.065	0.09	0.11	0.12	0.13	0.14	0.15
N	NON-FERROUS		Vc (m/min)								
1.1-2.3	ALUMINIUM alloyed/cast	<600	190	0.15	0.16	0.18	0.2	0.21	0.23	0.26	0.3
3.1-3.3	COPPER alloyed	<600	145	0.07	0.085	0.1	0.125	0.145	0.16	0.18	0.2
T	TITANIUM		Vc (m/min)								
2.1-2.2	pure/alloyed	<1000	35	0.06	0.085	0.1	0.11	0.12	0.13	0.14	0.15
S	SUPER ALLOYS		Vc (m/min)								
1.1-1.3	HRSA	<1450	20	0.03	0.05	0.075	0.1	0.11	0.12	0.13	0.14
ADVICE The values marked in turquoise are side applications! Use maximum IC pressure. When using air cooling, please only use air through the spindle. Air cooling is only suitable to a limited extent, meaning that the tool needs some time to cool down after a certain number of holes have been drilled.											



STILL CAN'T FIND A SUITABLE MILLING CUTTER?

No problem – simply customize an existing tool. Using our configurator for special milling cutters, you can customize existing tools to your needs in an instant or create your own tools based on predefined types.

WE WILL RESPOND TO ALL
REQUESTS SUBMITTED VIA THE
CONFIGURATOR WITHIN ONE
WORKING DAY AT THE LATEST



EXPLANATION

APPLICATIONS

 Multipass milling	 Trimming	 Deburring	 Engraving
 Corner rounding	 Full slot milling	 Forward and backward deburring	 Drilling

COOLINGS


 Air-cooling	 Dry machining	 Oil cooling	 Cooling Lubricant
 Minimum quantity lubrication			

FEATURES

 0,5xD	0,5xD	 1xD	1xD	 1,5xD	1,5xD	 2xD	2xD
 2,5xD	2,5xD	 3xD	3xD	 3,5xD	3,5xD	 4xD	4xD
 5xD	5xD	 8xD	8xD	 Center cutting	Center cutting	 Non-center cutting	Non-center cutting
 HA	Without Weldon	 HB	With Weldon	 HE	With Notch surface	 Internal cooling	Internal cooling
 Twisted internal cooling	Twisted internal cooling	 Dynamic helical pitch	Dynamic helical pitch	 Chip breaker	Chip breaker	 Unequal tooth pitch	Unequal tooth pitch
 Roughing teeth	Roughing teeth	 Helical immersion	Helical immersion	 Feed directions x,y	Feed directions x,y	 Feed directions x, y, z	Feed directions x, y, z
 Feed directions x, y, (z)	Feed directions x, y, (z)	 Feed direction z	Feed direction z	 Corner radius	Corner radius	 Corner bevel	Corner bevel
 Sharp edged	Sharp edged	 60° Tip	60° Tip	 90° Tip	90° Tip	 140° Tip	140° Tip

STRATEGY

 ETC	Extended Trochoidal Cutting	 HPC	High Performance Cutting	 HSC	High Speed Cutting	 MTC	Multi Task Cutting
 UNI	Universal Machining						

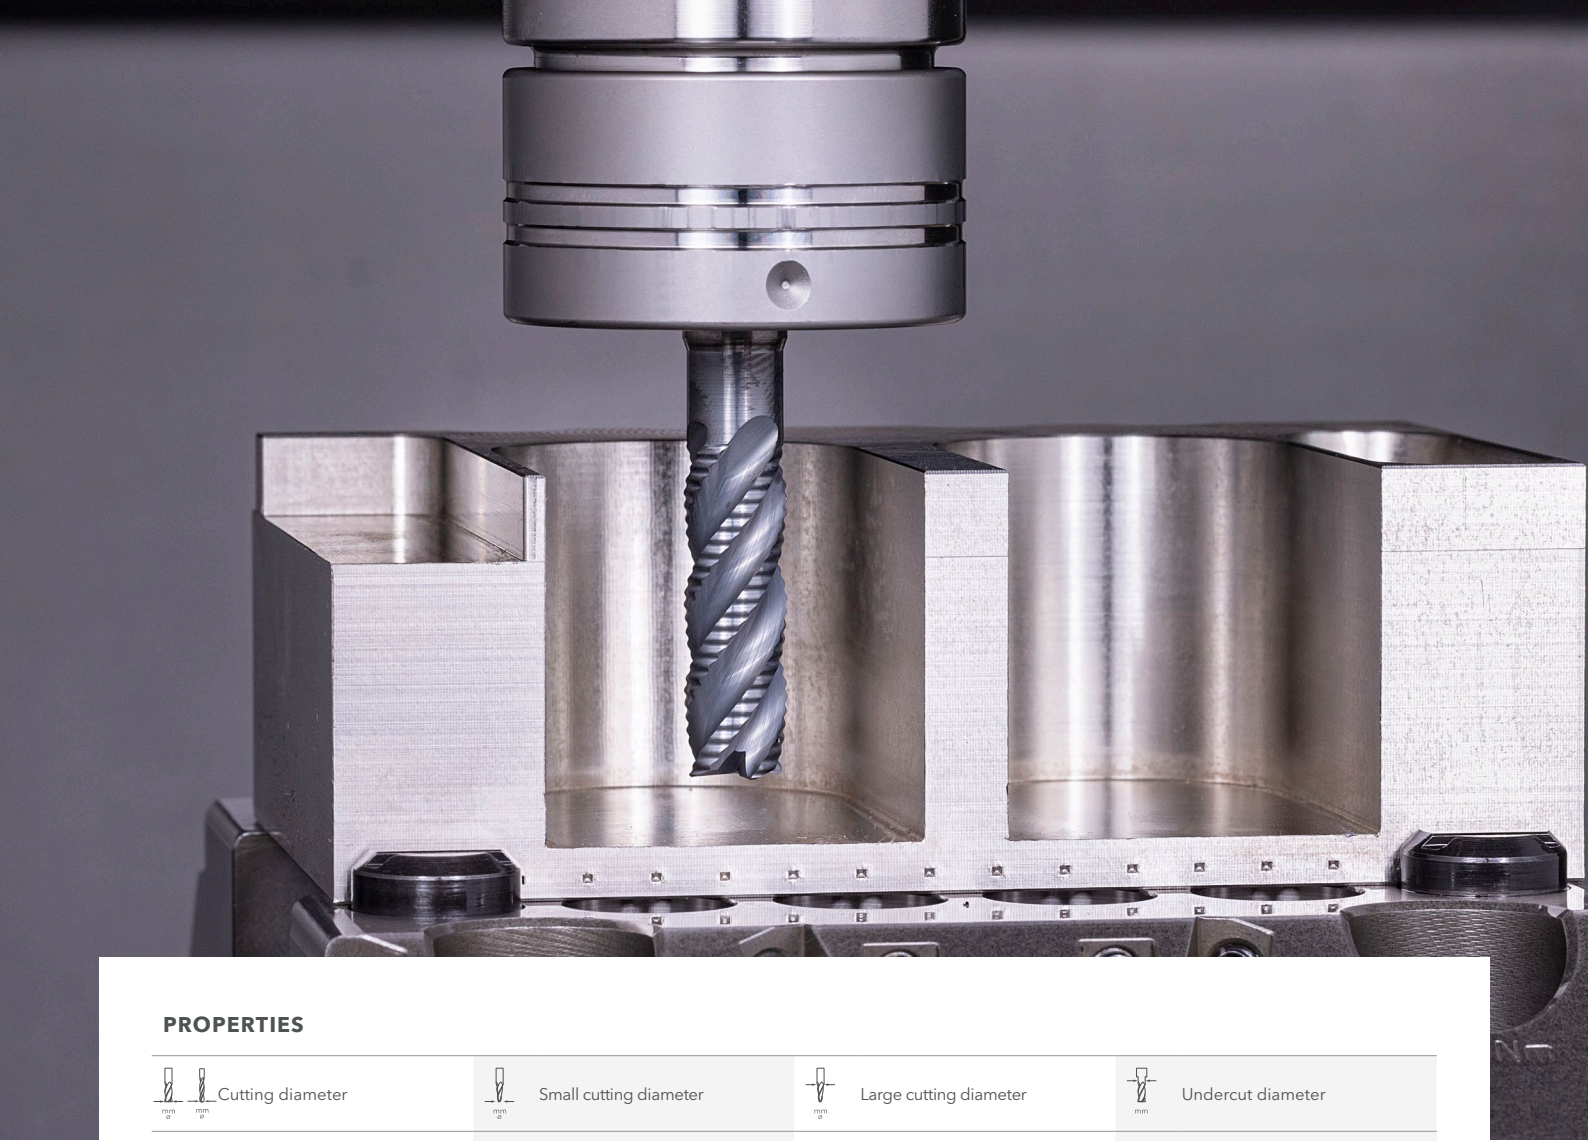

PROPERTIES

 Cutting diameter	 Small cutting diameter	 Large cutting diameter	 Undercut diameter
 Cutting length	 Total bevel length	 Undercut length	 Total length
 Shank diameter	 Number of teeth	 Corner radius	 Corner bevel
 Programming radius	 Maximum cutting depth	 Helical angle	 Alpha angle
 Recess and cut length			

APPLICATION TABLE

The values given in the application table are only guidelines. These values are largely dependent on the machining situation and application.

FIGURES

All technical drawings and photographs are given as an example. The product may deviate from the original in terms of colour and dimensions.

P 1.1 STEEL | unalloyed <500 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.0498	ST42.8							STPT 42	
1.0044	ST442		E28-2	4360-43 B	Fe 430 BFN	1412	AE 275-B	SM 41 B	570 Gr. 40
1.0420	GS38	GE 200	230-400M			1306			
1.0446	GS45	GE 230	E23-45M	A1		1305	F.221	SC 450	
1.0136	St42-3								
1.0254	St37.0	P235T1						STPG 38	
1.1120	GS20Mn5							SMnC 420	
1.1121	Ck10	2 C 10	XC 10	040 A 10	C 10	1265	C 10 k	S 10 C	1010
1.1131	GS15Mn5								
1.1151	Ck22	2 C 22	XC 25	050 A 20	C 20		C 25 k	S 22 C	1023
1.5523	19MnB4			170 H 20			20 Mn B 4 DF	SWRCHB	
1.8961	WTSi373				Fe 360 D FF			SMA 50 A	
1.0035	ST33		A 33		FE 320			SS 330	
1.0037	ST37-2							STKR 400	
1.0710	15S10								
1.0715	9SMn28	11 SMn 28	S 250	230 M 07	CF 9 SMn 28	1912	11 SMn 28	SUM 22	1213
1.0718	9SMnPb28	11 SMnPb28	S 250 Pb		CF 9SMnPb 28	1914	11 SMnPb 28	SUM 22 L	12 L 13
1.0721	10S20	10 S 20	10 F 1	210 M 15	CF 10 S 20		10 S 20		1108
1.0722	10SPb20	10 SPb 20	10 Pb F 2		CF 10 SPb 20		10 SPb 20		11 L 08
1.0736	9SMn36		S300	240 M 07	CF 9 SMn 36		12 SMn 35	SUM 25	1215
1.0737	9SMnPb36		S 300 Pb		CF 9 SMnPb 36	1926	12 SMnPb 35		12 L 14

P 1.2 STEEL | unalloyed <700 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.0553	S244J0	S355J0	E 36-3	En 50 C	Fe 510 C FN			SM 520 M	S355J0
1.0581	ST52.4							STS 49	
1.1140	C15R	C15R	C15R	C15R			C 16 k-1		
1.1141	Ck15	2 C 15	XC 15	080 M 15	C 15	1370	C 16 k	S 15 C	1015
1.1190	S355G15								
1.0116	ST373		E 24-3	4360-40 C	Fe 37-3	1312	A 360 C		A 570 Gr. 36
1.0144	ST443		E 28-3	4360-43 C	Fe 430 D FF	1414	AE 275-D	SM 41 B	A 573 Gr. 70
1.0401	C15		CC12	080 M 15	C 15	1350	F.111	S 15 C	1015
1.0402	C22	1 C 22	CC 22	070 M 20	C 22		C 22 k	SFVC 1	
1.0406	C25	1 C 25	CC 25	070 M 26	C 25		C 25 k	S 22 C	1025
1.0461	STE255								
1.0482	19Mn5		A 52 CP	224-460				SG 37	
1.0486	STE285				FE E 285 KG		AE 285 KG	SM 41 A	
1.0501	C35	1 C 35	CC 35	060 A 35	C 35	1550	F.113	S 35 C	1035
1.0503	C45	1 C 45	CC 45	080 M 46	C 45	1650	C 45 k	S 45 C	1045
1.0505	STE315							SM 50 A	
1.0511	C40	1 C 40		080 M 40			F.114.A	S 40 C	1040
1.0528	C30	1 C 30	CC 32	080 M 30	C30		SUP 7	S 30 C	1030
1.0540	C50	1 C 50		080 M 50		1674		S 50 C	1050
1.0552	GS52	GE 260							
1.0558	GS60	GE 300	320-560M	A3	C 45	1606			
1.0562	STE355		E 355 R/FP		Fe E 355 KG	2132	AE 355 KG	SM 50 YB	A 633 Gr. C
1.0711	9S20			220 M 07	CF 9 S 22			G 11120	1212
1.0970	38Si7		41 S 7						
1.1106	ESTE355			P 355 NL 2				STK 500	
1.1127	36Mn6			212 M 36				SMn 443	1141
1.1133	20MN5			120 M 19	G 22 Mn3		20 Mn 6	SMn 420	1022
1.1169	20Mn6								
1.1520	C70W1				C 70 KU				
1.5637	10Ni14			503	18 Ni 14 KT				A 350-LF 5
1.8962	9CrNiCuP324			WR 50 A				SPA-H	
1.0726	35S20	35 S 20	35 MF 4	212 M 36		1957	F.210G		1140
1.0760	38SMn28	38SMn28	38SMn28	38SMn28			38SMn28		
1.1158	Ck25	2 C 25	XC 25	070 M 26	C 25		C 25 k	S 25 C	1025
1.1178	Ck30	2 C 30	XC 32	080 M 30	C30			S 30 C	1030
1.1181	Ck35	2 C 35	XC 38 H1	080 M 36	C35	1572	C 35 k	S 35 C	1034
1.1183	Cf35		XC 38 TS	060 A 35	C35	1572		S 35 C	1035
1.1191	Ck45	2 C 45	XC 42	080 M 46	C40		C45 k	S 45 C	1045
1.1206	Ck50	2 C 50		080 M 50	C50	1674		S 50 C	1050
1.1730	C45W	C 45 U	Y3 42						
1.5423	16Mo5			1503-245-420	16 Mo 5		16 Mo 5	SBC 690	4520

P 1.3 STEEL | unalloyed <850 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.1165	GS30Mn5		35 M 5	120 M 36		1330	30 Mn 5	SMn 433 H	1330
1.1525	C80W1	C 80 U	Y1 90		C 80 KU	1880	F.513		W 108
1.1545	C105W1	C 105 U	Y1 105	BW 1A	C 100 KU	1880	F.515		W 110
1.1620	C70W2	C 70 U							
1.1625	C80W2		Y1 80	BW 1B	C 80 KU		C 80	SKC 3	W 1
1.1645	C105W2						C 102	SK 3	
1.1663	C125W	C 120 U	Y2 120		C 120 KU		C 120	SK 2	W 112
1.1673	C135W		Y2 140		C 140 KU			SK 1	
1.1740	C60W		Y3 55					SK 7	
1.1820	C55W								
1.1830	C85W	C 90 U	Y3 90					SK 5	1084
1.1744	C67W		Y1 70				F.512		A-6
1.1750	C75W			BW 1A					W 1
1.5404	21MoV53								
1.5406	17MoV84								
1.5633	24Ni8	G 9 Ni 10	22 N 8		G 9 Ni 10			SCPL 21	
1.6311	20MnMoNi45	20 MnMoNi 4 5						SQV 2 B	
1.7242	16CrMo4	18 CrMo 4	15 CD 3.5		18 CrMo 4		18 CrMo 4	SCM 418 H	
1.7258	24CrMo4							SCM 822 H	
1.7259	26CrMo7								
1.7273	24CrMo10								
1.7337	16CrMo44				A18 CrMo 4 5 KW				A 387 Gr. 12 Cl. 2
1.7350	22CrMo44								
1.7362	12CrMo195	X 12 CrMo 5	Z 10 CD 5.05	3606-625	16 CrMo 20 5			SCMV 6	
1.7709	21CrMoV57	21 CrMoV 5 7	20 CDV 5.07						
1.7766	17CrMoV10								
1.7779	20CrMoV135								

P 1.4 STEEL | unalloyed <950 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.0062	ST601								
1.0532	ST522	S 390 G 1 S							
1.0535	C55	1 C 55	C 55	070 M 55	C 55	1655		C 55	1055
1.0570	ST523	S 355 J2 F3	E 36-3	4360-50 B	Fe 510 B	2132	A 510 C	SM 50 YB	
1.0728	60S20	60 S 20	60 MF 4						1151
1.1203	Ck55	2 C 55	XC 55 H1	070 M 55	C 55	1655	C 55 k	S 55 C	1055
1.7276	10CrMo11		12 CD 10						
1.7281	16CrMo93		20 CD 8						

P 1.5 STEEL | unalloyed <1100 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.0070	ST702		A 70-2		Fe 70-2		A 690-2		
1.0601	C60	1 C 60	AF 70 C 55	080 A 62	C 60			S 60 C-CSP	1060
1.1221	Ck60	2 C 60	XC 60	060 A 62	C 60	1678		S 58 C	1060
1.1223	Cm60	3 C 60	C 60 R	080 A 67	C 60 R				
1.0603	C67W								

P 2.1 STEEL | low alloyed <750 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.0961	60SiCr7	60 SiCr 8	60 SC 7	250 A 61	60 SiCr 8		60 SiCr 8	SUP 7	9262
1.2101	62SiMnCr4								
1.2162	21MnCr5	21 MnCr 5	20 NC 5					SCR 420 H	
1.2208	31CrV3								
1.2210	115CrV3	107 CrV 3 KU	100 C 3		107 CrV 3 KU		F.520.L		L2
1.2235	80CrV2						F.520.J		
1.2241	51CrV4	51 CRMnV 4			51 CrMnV 4 KU				S6
1.2307	29CrMoV9								
1.2323	48CrMoV67		45 CDV 6						
1.2382	GX155CrVMo121								
1.2414	120W4						F.532		
1.2542	45WCrV7	45 WCrV 8		BS 1	45 WCrV 8 KU	2710	45 WCrSi 8		S1
1.2552	80WCrV8						60 WCrSi 8		
1.2726	26NiCrMoV5								
1.2737	28NiCrV5								
1.2738	40CrMnNiMo864	40CrMnNiMo8-6-4							
1.2826	60MnSi4		60 MSC 4						
1.2838	145V33								
1.2842	90MnCrV8	90 MnV 8	90 MV 8	BO 2	90 MnVCr 8 KU				0 2
1.5752	14NiCr14	13 NiCr 12	16 NC 12	655 M 13	16 NiCr 11			SNC 815 H	E3310
1.5919	15CrNi6	14 CrNi 6	16 NC 6	S 107	16 CrNi 4			SNCM 420	
1.7003	38Cr2	38 Cr 2 KD	38 C 2	120 M 36	38 Cr 3		38 Cr 3	SMn 438	50 B40
1.7012	13Cr2								
1.7045	42Cr4	40 NiCrMo 3	42 C 4 TS	530 A 40	41 Cr 4	2245	42 Cr 4	SCr 440	5140
1.7103	67SiCr5	67 SiCr 5			67 SiCr 5				
1.7131	16MnCr5	16 MnCr 5 KD	16 MC 5	527 M 17	16 MnCr 5	2173	16 MnCr 5	SCR 415	5115
1.7271	23CrMoB33								
1.7715	14MoV63	14 MoV 6-3		1503-660-440			13 MoCrV 6		
1.8907	STE500							SM 58	
1.8911	ESTE380								

P 2.2 STEEL | low alloyed <950 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.0902	46Si7		45 S7				46 Si 7		
1.0906	65Si7			250 A 61					
1.0985	QSTE500N								
1.1157	40Mn4		35 M 5	150 M 36					1039
1.1167	36Mn5		40 M 5	150 M 36		2120	36 Mn 5		1335
1.1170	28Mn6	28 Mn 6	35 M 5	150 M 17	C 28 Mn		36 Mn 6	SCMn 1	1330
1.1199	49MnVS3			280 M 01					
1.2002	125Cr1		Y2 120 C						
1.2003	75Cr1		35 M 5	150 M 36					
1.2004	85Cr1		Y1 100 C 2						
1.2008	140Cr3		Y2 140 C					SKS 8	
1.2056	90Cr3								
1.2057	105Cr4						F.120.J	SKC 11	
1.2108	90CrSi5	P 280 GH			C 100 KU	2092		SFVC 2A	
1.2109	125CrSi5								
1.2127	105MnCr4				100 CrMn 4 KU			SUJ 3	
1.2206	140CrV1		130 C 3						0 6
1.2242	59CrV4								
1.2243	61CrSiV5								
1.2249	45SiCrV6								
1.2303	100CrMo5						F.520.F		L 7
1.2312	40CrMnMoS86		40 CMD 8						
1.2519	110WCrV5						102 WCrV 5		
1.2562	142WV13								
1.2740	28NiCrMoV10								
1.2743	60NiCrMoV124								
1.2747	28NiMo17								
1.2766	35NiCrMo16								
1.2851	34CrAl6								
1.3501	100Cr2		100 C 2						E 50100
1.3503	105Cr4								E51100
1.3505	100Cr6	100 Cr 6	100 C 6	535 A 99	100 Cr 6	2258	100 Cr 6	SUJ 2	E52100
1.3520	100CrMn6	100 Cr Mn 6	100 CM 6				100 CrMn 6		

P 2.3 STEEL | low alloyed <1100 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.2419	105WCr6	105 WCr 5	105 WC 13		107 WeR 5 KU	2140	105 WCr 5	SKS 31	
1.2511	80WCrV3								
1.2515	100WV4							SKS 21	
1.3561	44Cr2	46 Cr 1 KD	44 Cr 2						5046
1.3563	43CrMo4		43 CrMo 4						4142
1.3565	48CrMo4								
1.5023	38Si7								
1.5025	51Si7	50 Si 7			48 Si 7	2090			9259 H
1.5029	71Si7								
1.5085	51Mn7								
1.5094	38MnS6	38 MnS 6							
1.5131	50MnSi4								
1.5141	53MnSi4								
1.5142	60MnSi5								
1.5213	15MnV5								
1.5217	20MnV6								
1.5223	42MnV7								
1.5225	51MnV7								
1.5231	38MnSiV55								
1.5232	27MnSiV56								
1.5233	44MnSiV56								
1.5403	17MnMoV64			1501-261				SBV 3	
1.5526	30MnB4								
1.5710	36NiCr6		30 NC 6	640 A 35				SNC 236	3135
1.5736	36NiCr10		30 NC 11		35 NiCr 9			SNC 631 H	3435
1.5755	31NiCr14		18 NC 13	653 M 31				SNC 836	
1.6225	11NiMn54								
1.6310	20MnMoNi55		18 MND 5						
1.6368	15NiCuMoNb5			3604-591				SBV 2	
1.6511	36CrNiMo4	36 CrNiMo 4	40 NCD 3	816 M 40	38 NiCrMo 4 KB		35 NiCrMo 4		9840
1.6582	34CrNiMo6	34 CrNiMo 6	35 NCD 6	817 M 40	35 NiCrMo 6 KB	2541	40 NiCrMo 7	SNCM 447	4340
1.6946	30CrMoNiV511								
1.6948	26NiCrMoV115								
1.6971	79Ni1								
1.6972	83Ni1								
1.7038	37CrS4	37 CrS 4						SUP 11	50 B50 H
1.7214	25CrMo4				25 CrMo 4 F				
1.7389	GX12CrMo101								
1.7561	42CrV6								
1.7701	51CrMoV4		51 CDV 4		51 CrMoV 4				
1.7707	30CrMoV9								
1.7711	40CrMoV47	40 CrMoV 4 6	42 CDV 4	1506-670-860				SNB 21-1-5	
1.7725	GS30CrMoV64								
1.7733	24CrMoV55		20 CDV 6		24 CrMoV 5 5				
1.7735	14CrMoV69								
1.7741	42CrMoV73								
1.7755	GS45CrMoV104								
1.7756	GS36CrMoV104	G 36 CrMoV 10 4							
1.8070	21CrMoV511				21 CrMoV 5 11				
1.8159	50CrV4	51 CrV 4	50 CV 4	735 A 50	50 CrV 4	2230	51 CrV 4	SUP 10	6150
1.8212	21CrVMoW12								
1.8521	15CrMoV59								
1.8509	41CrAlMo7	41 CrAlMo 7	40 CAD 6. 12	905 M 39	41 CrAlMo 7	2940	41 CrAlMo 7	SACM 645	E 71400
1.8515	31CrMo12	31 CrMo 12	30 CD 12	722 M 24	31 CrMo 12	2240	31 CrMo 12		
1.8523	39CrMoV139	39 CrMoV 13 9		897 M 39	36 CrMoV 10				
1.8550	34CrAlNi7	34 CrAlMo 5							
1.8827	S460M	S 460 M	E 460	S 460 M	S460M		S460M		

P 2.4 STEEL | low alloyed <1300 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.1273	90Mn4			060 A 96				SUP 4	1090
1.2311	40CrMnMo7			BP 20	35 CrMo 8 KU				P 20
1.2710	45NiCr6								
1.2762	75CrMoNiW67								
1.5864	35NiCr18								
1.6587	17CrNiMo6	17 CrNiMo 7	18 NCD 6	820 A 16	18 NiCrMo 7	2523	14 NiCrMo 13	SNCM 815	
1.7222	42CrMoPb4								
1.7225	42CrMo4.M45	42 CrMo 4	42 CD 4	708 A 42	42 CrMo 4	2244		SCM 440 H	4140
1.7227	42CrMoS4	42 CrMoS 4	42 CD	708 H 42	42 CrMoS 4	2244	40 CrMo 4		
1.7238	49CrMo4								

P 3.1 STEEL | high alloyed <800 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.2362	X63CrMoV51								
1.2363	X100CrMoV51	X 100 CrMoV 5 1	Z 100 CDV 5	BA 2	X 100 CrMoV 5 1 KU	2260	X 100 CrMoV 5	SKD 12	A 2
1.2367	X38CrMoV53		Z 38 CDV 5 3						
1.2376	X96CrMoV12								
1.2379	X155CrVMo121	X 153 CrMoV 12	Z 160 CDV 12	BD 2	X 155 CrVMo 12 1 KU	2310		SKD 11	D 2
1.2453	X130W5								
1.2564	X30WCrV41	30 WCrV 15 1					F.527		
1.2567	X30WCrV53	X 30 WCrV 5 3	Z 32 WCV 5		X 30 WCrV 5 3 KU			SKD 4	
1.2606	X37CrMoW51		Z 35 CWDV 5	BH 12	X 35 CrMoW 05 KU		F.537	SKD 62	H 12
1.2631	X50CrMoW911								
1.2786	X13NiCrSi3615	X 13 CrNiSi 36 15	Z 35 NCS 37-18						
1.2889	X45CoCrMoV553								

P 3.2 STEEL | high alloyed <1100 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.2083	X42Cr13	X 42 Cr 13	Z 40 C 14		X 41 Cr 13 KU	2314		SUS 420 J2	420
1.2316	X36CrMo17	X 36 CrMo 17	X38CrMo 16 1		X 38 CrMo 16 1 KU		X 38 CrMo 16		D-4
1.2343	X38CrMoVH1	X 38 CrMoV 5 1	Z 38 CDV 5	BH 11	X 37 CrMoV 5 1 KU		X 37 CrMoV 5	SKD 6	H 11
1.2344	X40CrMoV51	X 40 CrMoV 5 1	Z 40 CDV 5	BH 13	X 40 CrMoV 5 1 1 KU 2242		X 40 CrMoV 5	SKD 61	H 13
1.2436	X210CrW12	X 210 CrW 12	Z 210 CW1 2		X 215 CrW 12 1 KU	2312	X 210 CrW 12	SKD 2	
1.2581	X30WCrV93	X 30 WCrV 9 3	Z 30 WCV 9	BH 21	X 30 WCrV 9 3 KU		X 30 WCrV 9	SKD 5	H 21
1.2601	X165CrMoV12	X 165 CrMoV 12			X 165 CrMoW 12 KU	2310	X 160 CrMoV 12		
1.2622	X60WCrMoV94								
1.2678	X45CrCoVW555								H 19
1.2731	X50NiCrWV1313								
1.2764	X19NiCrMo4								
1.2767	X45NiCrMo4	40 NiCrMo 4	Y 35 NCD 16		42 NiCrMo 15 7 KU				A 9
1.2779	X6NiCrTi2615			S 66286					660
1.2787	X23CrNi17	HS 6-5-2	Z 85 WDCV 06 05 04 02	BM 2	HS 6 5 2 2	2722		SKH 9	
1.3302	S1214	HS 12 1 4			X 150 WV 1305 KU				A 7
1.3318	S1212	HS 02.01.12							
1.3401	X120Mn12	X 120 Mn 12	Z 120 M 12	BW 10	X G 120 Mn 12	2183	AM-X 120 Mn 12	SCMnH 1	A 128
1.3543	X102CrMo17	X 102 CrMo 17	X100CrMo17		X 105 CrMo 17		X 100 CrMo 17		
1.3549	X89CrMoV81								
1.3551	80MoCrV4216		80 DCV 40	T 11350	X 80 MoCrV 4 4		80 MoCrV 40-16		M 50

P 3.3 STEEL | high alloyed <1400 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.2709	X3NiCoMoTi1895								
1.2790	72SiNiCrMoV54								
1.2888	X20CoCrWMo109								
1.3202	S12145	HS12-1-5-5		BT 15	HS 12-1-5-5		12-1-5-5		T 15
1.3207	S104310	HS10-4-3-10	Z130WKCDV10-10-04-04	BT 42	HS 10-4-3-10		10-4-3-10	SKH 57	M 44
1.3243	S6525	HS6-5-2-5	KCV 06-05-05-04-02		HS 6-5-2-5	2723	6-5-2-5	SKH 55	M 35
1.3246	S7425	HS1-8-1	Z110 WKCDV 07-05-04	T 11341	HS 7-4-2-5		7-4-2-5		M 41
1.3247	S21018	HS2-9-1-8	Z110 DKCWV 09-08-04	BM 42	HS 2-9-1-8		2-10-1-8		M 42
1.3249	S2928			BM 34			2-9-2-8		
1.3255	S18125	HS18-1-1-4	Z80 WKCVC 18-05-04-01	BT 4	HS 18-1-1-5		18-1-1-5	SKH 3	T 4
1.3257	S181215								
1.3265	S181210	HS18-0-1-10		BT 5	HS 18-0-1-10		18-0-2-10	SKH 4A	T 5
1.3342	SC652	HS6-5-2	Z90 WDCVC 06-05-04-02		HSC 6-5-3				M 3
1.3343	S652	HS6-5-3	Z85 WDCVC 06-05-04-02	BM 2	HS 6-5-2	2722	6-5-2	SKH 51	M2
1.3344	S653		Z120 WDCVC 06-05-04-03				6-5-3	SKH 52	M 3 Cl.2
1.3346	S291	HS1-8-1	Z85 DCWV 08-04-02-01	BM 1	HS 1-8-1				M1
1.3348	S292	HS2-9-2	Z100 DCWV 09-04-02-02		HS 2-9-2	2782	2-9-2		M 7
1.3355	S1801	HS18-0-1	Z80 WCV 18-04-01	BT 1	HS 18-0-1		18-0-1	SKH 2	T 1
1.3549	X89CrMoV81								
1.3551	80MoCrV4216		80 DCV 40	T 11350	X 80 MoCrV 4 4		80 MoCrV 40-16		M 50

K 1.1 GREY CAST IRON <600 N/mm² (180 HB)

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
0.6010	GG10	GJL-100	FGL 100	Grade 100	G 10	0110-00	FG 10	FC 100	A48-20 B
0.6012	GG150 HB	GJL-HB 170							
0.6015	GG15	GJL-150	FGL 150	Grade 150	G 15	0115-00	FG 15	FC 150	A48-25 B
0.6017	GG170 HB	GJL-HB 205							

K 1.2 GREY CAST IRON <1000 N/mm² (300 HB)

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
0.6020	GG20	GJL-200	FGL 200	Grade 220	G 20	0120-00	FG 20	FC 200	A48-30 B
0.6022	GG190 HB	GJL-HB 230							
0.6025	GG25	GJL-250	FGL 250	Grade 260	G 25	0125-00	FG 25	FC 250	A48-40 B
0.6027	GG220 HB	GJL-HB 250	FGL 250						
0.6030	GG30	GJL-300	FGL 300	Grade 300	G 30	0130-00	FG 30	FC 300	A48-45 B
0.6032	GG240 HB	GJL-HB 275							
0.6035	GG35	GJL-350	FGL 350	Grade 350	G 35	0135-00	FG 35	FC 350	A48-50 B
0.6037	GG260 HB	GJL-HB 275							
0.6040	GG40	GJL-400	FGL 400	Grade 400		0140-00			A48-60 B

M 1.1 STAINLESS STEEL FERRITIC/MARTENSITIC <850 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.4000	X6Cr13	X 6 Cr 13	Z 6 C 13	403 S 17	X 6 Cr 13	2301	X 6 Cr 13	SUS 403	403
1.4002	X6CrAl13	X 6 CrAl 13	Z 6 CA 13	405 S 17	X 6 CrAl 13	2302	X 6 CrAl 13	SUS 405	405
1.4003	X2CrNi12	X2CrNi12	CLC 4003		F 12N				
1.4005	X12CrS13	X 12 CrS 13	Z 12 CF 13	416 S 21	X 12 CrS 13	2380	X12 CrS 13	SUS 416	416
1.4006	X10Cr13	X 12 Cr 13 KD	Z 12 C 13	410 S 21	X 12 Cr 13	2302	X 12 Cr 13	SUS 410	410
1.4008	GX8CrNi13	GX 7 CrNiMo 12 1	Z 12 CN 13 M	410 C 21	GX 12 Cr 13			SCS 1	414
1.4016	X6Cr17	X 8 Cr 17	Z 8 C 17	430 S 15	X 8 Cr 17 KD	2320	X 8 Cr 17	SUS 430	430
1.4017	X6CrNi171	X 6 CrNi 17 1	F 17 N		X 6 CrNi 17 1				
1.4021	X20Cr13	X 20 Cr 13	Z 20 C 13	420 S 37	X 20 Cr 13	2303	X 20 Cr 13	SUS 420 J1	420
1.4024	X15Cr13	X 15 Cr 13	Z 12 C 13 M	420 S 29	X 12 Cr 13			SUS 410 J1	
1.4027	GX20Cr14		Z 20 C 13 M	420 C 29				SCS 2	
1.4028	X30Cr13	X 30 Cr 13	Z 30 Cr 13	420 S 45	X 30 Cr 13	2304	X 30 Cr 13	SUS 420 J2	420
1.4031	X40Cr13	X 40 Cr 13	Z 40 C 14		X 40 Cr 14	2304	X 40 Cr 13	SUS 420	420
1.4034	X45Cr13	X 45 Cr 13	Z 40 C 14	420 S 45	X 40 Cr 14		X 46 Cr 13		420
1.4057	X19CrNi172	X 19 CrNi 17 2	Z 15 CN 16.02	431 S 29	X 16 CrNi 16	2321	X 15 CrNi 16	SUS 431	431
1.4059	GX22CrNi17		Z 20 CN 17.2 M	ANC 2					
1.4085	GX70Cr29								
1.4086	GX120Cr29			425 C 11					
1.4104	X12CrMoS17	X 14 CrMoS 17	Z 10 CF 17	441 S 29	X 10 CrS 17	2383	X 10 CrS 17	SUS 430 F	430 F
1.4105	X4CrMoS18	X 6 CRMoS 17	Z 6 CDF 18-02					SUS 430 F	430
1.4106	X10CrMo13								
1.4107	GX8CrNi12	GX 8 CrNi 12	GX 8 CrNi 12		GX 8 CrNi 12				
1.4108	X100CrMo13								
1.4109	X65CrMo14	X 70 CrMo 15	Z 70 CD 14					SUS 440 A	440 A
1.4110	X55CrMo14		Z 50 CD 13						
1.4111	X110CrMoV15		Z 4 CN b 17		X 6 CrNb 17			SUS 430 LX	
1.4112	X90CrMoV18	X 90 CrMoV 18	Z 3 CT 1.2	409 S 1 9	X 6 Cr Ti 1 2			SUS 440 B	440 B
1.4113	X6CrMo171	X 8 CrMo 17	Z 8 CD 17.02	434 S 17	X 8 CrMO 17	2325		SUS 434	434
1.4115	X20CrMo171								
1.4116	X45CrMoV15	X 50 CrMoV 15	Z 50 CD 15		X50 CrMoV 15		X 46 CrMo 16		
1.4117	X38CrMoV15								
1.4119	X15CrMo13								
1.4120	X20CrMo13		Z 20 CD 14						
1.4122	X35CrMo17	X 39 CrMo 17 1	X39CrMo17-1		X 35 CrMo 17				
1.4123	X15TN								
1.4125	X105CrMo17	X 105 CrMo 17	Z 100 CD 17		X 105 CrMo 17			SUS 440 C	440 C
1.4136	GX70CrMo292		Z 60 CD 29.2 M						
1.4138	GX120CrMo292								
1.4313	X5CrNi134	X 3 CrNiMo 13 4	Z 4 CDN 13.4	425 C 11	X 3 CrNiMo 13 4	2385		SCS 5	CA 6-NM
1.4317	GX4CrNi134	GX 4 CrNi 13 4	GX 4 CrNi 13 4		GX 4 CrNi 13 4				
1.4351	X3CrNi134	X 3 CrNi 14 04 KE							
1.4405	GX5CrNiMo165	GX 4 CrNiMo 16 5 1	GX 4 CrNiMo 16 5 1		GX 4 CrNiMo 16 5 1				
1.4502	X8CrTi18	X 6 Cr 18 KE							
1.4510	X6CrTi17	X 8 CrTi 17	Z 8 CT 17		X 6 CrTi 17		X 8 CrTi 17	SUS 430 LX	430 Ti
1.4511	X6CrNb17	X 3 CrNb 17	Z 8 CNb 17		X 6 CrNb 17			SUS 430 LX	430 Nb
1.4512	X6CrTi12	X 5 CrTi 12	Z 6 CT 12	409 S 19	X 6 CrTi12			SUH 409	409
1.4523	X8CrMoTi17	X 2 CrMoTiS 18 2	X 2 CrMoTiS 18 2						
1.4528	X105CrCoMo182								
1.4535	X90CrCoMoV17								
1.4543	X3CrNiCuTi129				X 6 CrNiNB 18 11				
1.4704	X45SiCr4	45SiCr16-11							HNV 2
1.4710	GX30CrSi6	GX 30 CrSi 6							
1.4712	X10CrSi6		K 51255						
1.4713	X10CrAlSi7	X 10 CrAlSi 7							
1.4718	X45CrSi93"	X 45 CrSi 8	Z 45 CS 9	401 S 45	X 45 CrSi 8		F.3220	SUH 1	HNV 3
1.4722	X10CrSi13						X 10 CrSi 13		
1.4724	X10CrAl13	X 10 CrAl 13	Z 10 C 13	BH 12	X 10 CrAl 12		X 10 CrAl 13	SUS 405	H-12
1.4725	X8CrAl144	CrAl 14 4	K 91670						
1.4729	GX40CrSi13				GX 35 Cr 13			SCH 1	
1.4740	GX40CrSi17				GX 35 Cr 17				
1.4742	X10CrAl18		Z 10 CAS 18	403 S 15	X 8 Cr 17		X 10 CrAl 18	SUH 21	430
1.4745	GX40CrSi23								
1.4747	X80CrNiSi20	X 80 CrNiSi 20	Z 80 CSN 20.02	433 S 65	X 80 CrSiNi 20		X 80 CrSiNi20-02	SUH 4	HNV 6
1.4762	X10CrAl24	X 10 CrAl 24	Z 10 CAS 24		X 16 Cr 26	2322	X 10 CrAl 24	SUH 442	446
1.4767	X8CrAl205	CrAl 20 5							
1.4773	X8Cr30								
1.4776	GX40CrSi29			452 C 11	GX 35 Cr 28			SCH 2	

M 2.1 STAINLESS STEEL | austenitic <650 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.4300	X12CrNi188			302					
1.4301	X5CrNi1810	X 6 CrNi 18 10 KD	Z 6 CN 18.09	304 S 15	X 5 CrNi 18 10	2332	X 5 CrNi 18 11	SUS 304	304 H
1.4302	X5CrNi199	X 6 CrNi 20 10 KE		308 S 96					
1.4303	X5CrNi1812	X 8 CrNi 18 12 KD	Z 8 CN 17.07	305 S 19	X 8 CrNi 19 10		X 8 CrNi 18 12	SUS 305	308
1.4305	X10CrNiS189	X 8 CrNiS 19 9	Z 8 CNF 18.09	303 S 31	X 8 CrNiS 18 9	2346	F.310.C	SUS 303	303
1.4307	X2CrNi189	X 2 CrNi 18 9	CLC 18.9.L	304 S 11	X 2 CrNi 18 9			SUS 304 L	304 L
1.4308	GX6CrNi189	X 2 CrNi 18 7	Z 6 CN 18.10 M	304 C 15	GX 5 CrNi 19 10	2333		SCS 13	CF-8
1.4310	X12CrNi177	X 12 CrNi 17 7	Z 12 CN 17.07	301 S 21	X 12 CrNi 17 07		X 12 CrNi 17 07	SUS 301	301
1.4311	X2CrNiN1810	X 2 CrNiN 18 10	Z 8 CN 18.12	304 S 62	X 8 CrNi 19 10	2371	X 8 CrNi 18 12	SUS 304 LN	304 LN
1.4312	GX10CrNi188		Z 10 CN 18.9 M	302 C 25				SCS 12	
1.4318	X 2 CrNiN 18 7	X 2 CrNiN 18 7	18-7L		18-7L				
1.4319	X3CrNiN178			302 S 26	X 10 CrNi 18 09			SUS 302	
1.4350	X5CrNi189		Z 6 CN 18.09	304 S 31	X 5 CrNi 18 10				304
1.4401	X5CrNiMo17122	X 6 CrNiMo 17 12 2 KD	Z 6 CND 17.11	316 S 16	X 5 CrNiMo 17 12	2347	X 5 CrNiMo 17 12	SUS 316	316
1.4404	X2CrNiMo17132	GX 3 CrNiMo 17 12 2 KD	Z 3 CND 19.10 M	316 S 12	GX 2 CrNiMo 19 11	2348	X 2 CrNiMo	SUS 316 L	316 L
1.4406	X2CrNiMoN17122	X 3 CrNiMoN 17 12 2	Z 2 CND 17.12 Az	316 S 61	X 2 CrNiMoN 17 12			SUS 316 LN	316 LN
1.4407	GX 5 CrNiMo 13 4	GX 5 CrNiMo 13 4	J 91550						A757
1.4408	GX6CrNiMo1810	GX 5 CrNiMo 19 11 2	GX 5 CrNiMo 19 11 2	316 C 16	GX 5 CrNiMo 19 11 2	2343	X 7 CrNiMo 20 10	SCS 14	CF-8M
1.4435	X2CrNiMo18143	X 2 CrNiMo 18 16	Z 2 CDN 17.13	316 S 11	X 2 CrNiMo 17 13	2353		SVS 16	316 L
1.4436	X5CrNiMo17133	X 6 CrniMo 18 13 3 KD	Z 6 CND 17.12	316 S 16	X 5 CrNiMo 17 13	2343	X 6 CrNiMo 17 12 03	SUS 316	316
1.4438	X2CrNiMo18164	X 3 CrNiMo 18 16 4	Z 2 CND 19.15	317 S 12	X 2 CrNiMo 18 15	2367		SUS 317 L	317 L
1.4440	X2CrNiMo18165								
1.4442	X2CrNiMo18154		X 3 CrNiMoN 18 14						

M 2.2 STAINLESS STEEL | austenitic <750 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.4429	X2CrNiMoN17133	X 3 CrNiMoN 17 12 2	Z 2 CND 17.13 Az	316 S 62	X 2 CrniMoN 17 13	2375		SUS 316 LN	316 LN
1.4432	X2CrNiMo17123	X 2 CrNiMo 17 12 2	Z 3 CND 17 13 30	316 S 13	X 2 CrNiMo 17 12 3			SUS 316L	316 L
1.4434	X2CrNiMoN18124		CLC 18.12.4.LN		X 2 CrNiMoN 18 12 4				317 LN
1.4439	X2CrNiMoN17135	X 3 CrNiMo 17 13 5	Z 3 CnD 18.14-05 Az						
1.4465	X1CrNiMoN25252								
1.4505	X5NiCrM-oCuNb2018								
1.4506	X5NiCrMoCuTi2018								
1.4529	X1NiCrMoCuN25206								
1.4536	GX2NiCrM-oCuN2520	GX 2 CrNiMoCuN 25 20 6							
1.4539	X1NiCrMoCuN25205	X 1 NiCrMoCu 25 20 5	Z 1 NCDU 25.20	904 S 13		2662			
1.4541	X6CrNiTi1810	X 6 CrNiTi 18 10	Z 6 CNT 18.10	321 S 12	X 6 CrNiTi 18 11	2337	X 7 CrNiTi 18 11	SUS 321	321
1.4542	X5CrNiCuNb164	X 5 CrNiCuNb 16 4	Z 7 CNU 17.04		X 5 CrNiCuNb 16 4			SUS 630	630
1.4550	X6CrNiNb1810	X 6 CrNiNb 18 10	Z 6 CNNb 18.10	347 S 17	X 6 CrNiNb 18 11	2338	X 6 CrNiNb 18 11	SUS 347	347
1.4551	X5CrNiNb199	X 5 CrNiNb 20 10 KE	Z 6 CNNb 20-10					SUS 347 Y	
1.4552	GX5CrNiNb189	GX 5 CrNiNb 19 11	Z 4 CNNb 19.10 M	347 C 17	GX 5 CrNiNb 19 11			SCS 21	
1.4571	X6CrNiMoTi17122	X 6 CrNiMoTi 17 12 2	Z 6 CNDT 17.12	320 S 31	X 6 CrNiMoTi 17 12	2350	X 6 CrNiMoTi 17 12 03	SUS 316 Ti	316 Ti
1.4573	X10CrNiMoTi812			320 S 33	X 6 CrNiMoTi 17 13			SUS 316 Ti	316 Ti
1.4575	X2CrNiMoNb2842								
1.4577	X3CrNiMoTi2525								
1.4580	X6CrNiMoNb17122	X 6 CrNiMoNb 17 12 2	Z 6 CNDNb 17.12	318 S 17	X 6 CrNiMo 17 12 2				316 Cb
1.4581	GX5CrNi-MoNb1810	GX 5 CrNiMoNb 19 11 2	Z 4 CNDNb 18.12 M	318 C 17	GX 6 CrNoMoNb 20 11			SCS 22	
1.4582	X4CrNiMoNb257							SCS 22	
1.4583	X10CrNiMoNb1812				X 6 CrNiMoNb 17 13				318
1.4585	GX7CrNiMoNb257								
1.4586	X5CrNiMo-CuNb2218								
1.4821	X20CrNiSi254	X 20 CrNiSi 25 4	Z 20 CNS 25.04			2322			
1.4822	GX40CrNi245		J 92605	J 92605					
1.4823	GX40CrNiSi274								
1.4825	GX25CrNiSi189			302 C 35	GX 16 CrNi 20 10				
1.4826	GX40CrNiSi229							SCH 12	
1.4828	X15CrNiSi2012	X 15 CrNiSi 20 12	Z 15 CNS 20.12	309 S 24	X 16 CrNiSi 20 12		X 15 CrNiSi 20 12	SUH 309	309
1.4833	X7CrNi2314	X 12 CrNi 23 13	Z 15 CN 24.13	309 S 24	X 6 Cni 23 14			SUS 309 S	309 S
1.4837	GX40CrNiSi2512			309 C 30	GX 35 CrNi 25 12			SCS 17	

M 2.2 STAINLESS STEEL | austenitic <750 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.4841	X15CrNiSi2520	X 15 CrNiSi 25 20	Z 15 CNS 25.20	314 S 25	X 16 CrNiSi 25 20		X 15 CrNiSi 25 20	SUH 310	310
1.4841	X15CrNiSi2520	X 15 CrNiSi 25 20	Z 15 CNS 25.20	314 S 25	X 16 CrNiSi 25 20		X 15 CrNiSi 25 20	SUH 310	310
1.4845	X12CrNi2521	X 8 CrNi 25 21	Z 12 CN 25.20	310 S 24	X 6 CrNi 25 20	2361	F.331	SUS 310 S	310 S
1.4848	GX40CrNiSi2520			310 C 40	GX 40 CrNi 26 20		X 40 CrNi 25 20	SCH 21	HK
1.4861	"	X10NiCr3220"							
1.4866	X33CrNiMnN238	X 33 CrNiMnN 23 8	X 33 CrNiMnN 23 8						
1.4871	X53CrMnNiN219		Z 52 CMN 21.09	349 S 54	X 53 CrMnNiN 21 9		X 53 CrMnNiN 21-09	SUH 35	EV 8
1.4873	X45CrNiW189	X 45 CrNiW 18 9	Z 35 CNWS 14.14	331 S 40	X 45 CrNiW 18 9		X 45 CrNiSiW 18-09	SUH 31	
1.4878	X12CrNiTi189	X 10 CrNiTi 18 10	Z 6 CNT 18.12	321 S 20	X 6 CrNiTi 18.11	2337	X 6 CrNiTi 18 11	SUS 321	321
1.4881	X70CrMnNiN216				X 70 CrMnNiN 21 6				EV 11
1.4882	X50CrMnNiNbN219	X 50 CrMnNiNbN 21 9	Z 50 CMNNb 21.09						
1.4919	X6CrNiMo1713	X 6 CrNiMo 17 12 2	Z 6 CND 17.13 B	316 S 51					316 H
1.4948	X6CrNi1811	X 6 CrNi 18 10	Z 6 CN 18.09	304 S 51	X 5 CrNi 18 10 KW	2333			
1.4949	X3CrNi1811				X 2 CrNiN 18 11				
1.4961	X8CrNiNb1613			347 S 51			X 7 CrNiNb 16 13		
1.4981	X8CrNiMoNb1616						X 7 CrNiMo 16 16		

M 3.1 DUPLEX STEEL | austenitic <1100 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.4162	X2CrMnNiN2252	X 2 CrMnNiN 22 5 2			X2CrMnNiN21-5-1		S32101	LDX 2101	S321 01
1.4362	X2CrNiN234	X 2 CrNiN 23 4	Z 3 CN 23 04 AZ			2327			S323 04
1.4410	X2CrNiMoN2574	X 2 CrNiMoN 25 7 4	Z 5 CND 20.10 M		X 2 CrNiMoN 25 7 4			SCS 14 A	S327 50
1.4460	X4CrNiMo2752	X 3 CrNiMo 27 5 2	X 2 CrNiMo 25 7 3		X 3 CrNiMo 27 5 2	2324	X 8 CrNiMo 27 05	SUS 329 J1	S325 50
1.4462	X2CrNiMoN2253	X 2 CrNiMoN 22 5 3	Z 3 CND 22.05 AZ	318 S 13	X 2 CrNiMoN 22 5 3	2377		SUS 329 J3L	S318 03
1.4465	X1CrNiMoN25252	X 1 CrNiMoN 25 25 2	Z 1 CND 25.22 AZ						S310 50
1.4501	X2CrNiMo-CuWN2574	X 2 CrNiMoCuWN 25 7 4	Z 3 CND 25.06 AZ					SM 25 Cr	S327 60
1.4507	X2CrNiMoCuN2563	X 2 CrNiMoCuN 25 6 3	Z 3 CNDU 25.06 AZ					QSA 2505	S325 20
1.4534	13-8 PH	X 3 CrNiMoAl 13 8 2	Z 4 CNDAT 13.09						S138 00
1.4542	17-4 PH	X 5 CrNiCuNb 16 4	Z 7 CNU 17 04					SUS 630	630
1.4545	15-5 PH	X 5 CrNiCu 15 5	Z 6 CNU 15 05						XM-12
1.4548	17-4 PH	X5CrNiCuNb1744	X 5 CrNiCuNb 16 4					SUS 630	S174 00
1.4568	17-7 PH	X 7 CrNiAl 17 7	Z 9 CNA 17 07	301 S 81	X 7 CrNiAl 17 7	2388	X 7 CrNiAl 17 7	SUS 631	S177 00

N 1.1 ALUMINIUM | alloyed <500 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
3.1255	AlCu 4 SiMg	AW-2014	A-U4SG	H 15	P-AlCu 4.4 SiMnMg		L-3130	A2014	AA2014
3.1305	AlCu 2.5 Mg	AW-2117	A-U2G	L 86	P-AlCu 2.5 MgSi		L-3180	A2117	AA2117
3.1324	AlCu 4 MgSi	AW-2017 A							
3.1325	AlCuMg1	AW-2017 A	A-U4G	H 14	P-AlCu 4.5 MgMn	GA631	L-3120	A2017	AA2017 A
3.1355	AlCuMg2	AW-2024	A-U4G1	L 97 / L 98	P-AlCu 4.5 MgMn	5	L-3140	A2024	AA2024
3.2315	AlMgSi 1	AW-6082	A-SGM0,7	H 30	P-AlMgSi	4212	L-3453		AA6082
3.3206	AlMgSi 0.5	AW-6060	A-GS	H 9	P-AlMgSi	4140	L-3442		AA6060
3.3208	Al99.9 MgSi	AW-6401							
3.3210	AlMgSi 0.7	AW-6005 A							
3.3211	AlMg 1 SiCu	AW-6061	A-GSUC	H 20	P-AlMg 1 SiCu		L-3420	A6061	AA6061
3.3315	AlMg1	AW-5005 A	A-G0,6	N 41	P-AlMg 0.9	4106	L-3350	A5005	AA5005 A
3.3316	AlMg 1.5	AW-5050	A-G1,5	3L 44	P-AlMg 1.5		L-3380		AA5050 B
3.3317	Al99.85 Mg 1	AW-5305							
3.3318	Al99.9 Mg 1	AW-5505							
3.3326	AlMg 1.8	AW-5051 A							
3.3345	AlMg 4.5	AW-5082	A-G4,5		P-AlMg 4.4			A5082	AA5082
3.3523	AlMg 2.5	AW-5052	A-G2,5C	L 80 / L 81	P-AlMg 2.5	4120	L-3360	A5052	AA5052
3.3525	AlMg 2 Mn 0.3	AW-5251	A-G2M	N4	P-AlMg 2 Mn		L-3361		AA5251
3.3527	AlMg 2 Mn 0.8	AW-5049	A-G2,5MC					A5049	AA5049
3.3535	AlMg 3	AW-5754	A-G3M		P-AlMg 3.5	4130	L-3390		AA5754
3.3537	AlMg 2.7 Mn	AW-5454	A-G2,5MC		P-AlMg 2.7 Mn	4130	L-3391		AA5454
3.3541	G-AlMg 3	AC-51100							
3.3545	AlMg 4 Mn	AW-5086	A-G4MC		P-AlMg 4.4		L-3382		AA5086
3.3547	AlMg 4 Mn	AW-5086	A-G4MC	N8	P-AlMg 4.5	4140	L-3321	A5083	AA5083

N 1.2 ALUMINIUM | alloyed <600 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
3.0615	AlMgSiPb	AW-6012	A-SGPb		P-AlSiMgMn		L-3452		AA6012
3.1645	AlCu 4 PbMgMn	AW-2007				4355	L-3121	A2007	AA2007
3.1655	AlCu 6 BiPb	AW-2011	A-U5PbBi	FC 1	P-AlCu 5.5 PbBi	4338	L-3192	A2011	AA2011
3.4335	AlZn 4.5 Mg 1	AW-7020	A-Z5G	H 17		4425	L-3741		AA7020
3.4345	AlZnMgCu 0.5	AW-7022	A-Z4GU						AA7022
3.4365	AlZnMgCu 1.5	AW-7075	A-Z5GU	2L 95	P-AlZn 5.8 MgCu		L-3710	A7075	AA7075

N 2.1 - 2.3 ALUMINIUM | cast <600 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
3.2151	G-AlSi 6 Cu 4	AC-45000	A-S5UZ	LM 4				AC4B	A 319.0
3.2161	G-AlSi 8 Cu 3	AC-46200	A-S9U3A-Y4	LM 24	5075			AC4D	A 328.0
3.2371	G-AlSi 7 Mg 0,3	AC-42100						AC4CH	A 356.0
3.2373	G-AlSi 9 Mg	AC-43300							
3.2381	G-AlSi 10 Mg	AC-43100							
3.2383	G-AlSi 10 Mg(Cu)	AC-43400	A-S10G	LM 9	3049	4253		ADC3	A 360.2
3.2581	G-AlSi 12	AC-47100	A-S13	LM 6	4514	4261		AC3A	A 413.2
3.2583	G-AlSi 12 Cu	AC-44300	A-S12-Y4	LM 20	5079	4260		ADC1	A 413.1

N 3.1 - 3.3 COPPER | alloyed <600 N/mm²

Materialnumber	Germany DIN	Europe EN	France AFNOR	Great Britain BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
2.0240	CuZn 15	CW-502L	CuZn 15	CZ 102				C 2300	C 23000
2.0265	CuZn 30	CW-505L	CuZn 30	CZ 102				C 2600	C 26000
2.0321	CuZn 37	CW-508L	CuZn 37	CZ 180	C 2720				C 27200
2.0492	G-CuZn 15 Si 4	CC-761S-GS							B-198
2.0592	G-CuZn 35 Al 1	CC-765S	U-Z 36 N 3	HTB 1					C 86500
2.0966	CuAl 10 Ni 5 Fe 4	CW-307G	U-A 10 N	CA 104					C 63000
2.1006	SG-CuSn								
2.1050	G-CuSn 10	CC-480K-GS		CT 1					C 90700
2.1052	G-CuSn 12	CC-483K-GS	UE 12 P	Pb 2					C 91700
2.1060	G-CuSn 12 Ni 2	CC-484K-GS							C 91700
2.1176	G-CuPb 10 Sn	CC-495K-GS	UE 10 Pb 10	LB 2					C 93700
2.1182	G-CuPb 15 Sn	CC-496K-GS	U-Pb 15 E 8	LB 1					C 93800
2.1188	G-CuPb 20 Sn	CC-497K-GS	U-Pb 20	LB 5					C 94100
2.1266	CuCd 1								
2.1292	G-CuCrF 35	CC-140C		CC1-FF					C 81500
2.1293	CuCrZr	CW-106C	U-Cr 0.8 Zr	CC 102					C 81500

S 2.1 TITANIUM | commercially pure <600 N/mm²

Material-number	Tradename	Germany DIN	Europe EN	France AFNOR	GB BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
3.7025		Ti 99,8	Titan Grade 1	AlR:9182T35	2 TA 1					R 50250
3.7035		Ti 99,7	Titan Grade 2	AlR:9182T40	2 TA 2-1					R 50400
3.7055		Ti-99,6	Titan Grade 3	AlR:9182T50	TA 3					R 50550
3.7065		Ti-99,5	Titan Grade 4	AlR:9182T60	2 TA 6-9					R 50700

S 2.2 TITANIUM | alloyed <1000 N/mm²

Material-number	Tradename	Germany DIN	Europe EN	France AFNOR	GB BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
3.7105		TiNi 0,8 Mo 0,3	Titan Grade 12							
3.7115		TiAl 5 Sn 2,5	Titan Grade 6	T-A 5 E						Ti 5 Al-2,5 Sn
3.7195		TiAl 3 V 2,5	Titan Grade 9							
3.7225		Ti 1 Pd	Titan Grade 11		TP 1					R 52250
3.7235		Ti 2 Pd	Titan Grade 7							T 52400
3.7164		TiAl 6 V 4-LN	Titan Grade 5							R 56400
3.7165		TiAl 6 V4	Titan Grade 5	T-A 6 V	TA 10-13					

S 1.1 IRON-BASED ALLOY [HRSA] <1200 N/mm²

Material-number	Tradename	Germany DIN	Europe EN	France AFNOR	GB BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
1.3910	Magnifer® 36	Ni36	D 1							
1.3926	Magnifer® 50	RNi12								
1.4361	X1CrNiSi1815	X 1 CrNiSi 18-15-4	X 1 CrNiSi 18 15 4							
1.4562	Nicrofer® 3127	X1NiCrMoCu32287	X 1 NiCrMoCu 32 28 7							
1.4562	Alloy 31	X1NiCrMoCu32287	X 1 NiCrMoCu 32 28 7							
1.4563	Sanicro® 28	X1NiCrMoCuN31274	X 1 NiCrMoCuN 31-27-4	X 1 NiCrMoCuN 31 27 4		X 1 NiCMoCuN 31 27 4	2584			
1.4862	INCOLOY® Alloy DS	X12NiCr3618		Z 12 NCS 37.18	NA 17					
1.4980	INCOLOY® Alloy 286	X6NiCrTiMoVB21152	X 6 NiCrTiMoVB 21 15 2	Z 6 NCTDV 25.15 B	286 S 31					
2.4478	Alloy 52 (Nilo® 52)	FeNi 52	Titan Grade 4	AIR:9182T60	2 TA 6-9					N 14052

S 1.2 NICKEL-BASED ALLOY [HRSA] <1450 N/mm²

Material-number	Tradename	Germany DIN	Europe EN	France AFNOR	GB BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
2.4602	INCONEL® 622	NiCr21Mo14W				INCONEL® 622				
2.4632	Nimonic® 90	NiCr20Co80Ti	HR 2	NC 20 KTA	NA 36	Nimonic® 90				N 07090
2.4642	INCONEL® 690	NiCr29Fe		NC 30 Fe		INCONEL® 690			NCF 690	N 06690
2.4650	Nimonic® C-263	NiCo20Cr20MoTi	HR 10	NCK 20 D	NA 38	Nimonic® C-263			NCF 690	N 07263
2.4654	Waspaloy®	NiCr19Co14Mo4Ti		NC 20 K14 Y		Waspaloy®				N 07001
2.4662	INCOLOY® 901	NiCr13Mo6Ti3		Z 8 NCDT 42						N 09901
2.4663	INCONEL® 617	NiCr23Co12Mo		NC 22 K12 D9 A		INCONEL® 617				N 06617
2.4665	Hastelloy® X	NiCr22Fe18Mo	HR 6	NC 22 FeD	NA 40	Hastelloy X				
2.4666	Nimonic® PK25	NiCr18CoMo		NKCD 20 ATU						
2.4668	INCONEL® 718	NiCr19FeNbMo	HR 8	NC 19 Fe Nb	INCONEL® 718	INCONEL® 718				N 07718
2.4669	INCONEL® X-750	NiCr15Fe7TiAl		NC 15 Fe 7 TA		INCONEL® X-750				N 07750
2.4694	INCONEL® 751	NiCr16Fe7TiAl								N 07751
2.4816	INCONEL® 600	NiCr15Fe		NC 15 Fe	NA 14	INCONEL® 600			NFC 600	N 06600
2.4819	Nimonic® C-276	NiMo16Cr15W		NC 17 D		Nimonic® C-276				N 10276
2.4851	INCONEL® 601	NiCr23Fe15		NC 23 Fe 14 A		INCONEL® 601			NCF 601	N 06601
2.4856	INCONEL® 625	NiCr22Mo9Nb		NC 22 Fe DNb	NA 21	INCONEL® 625			NCF 625	N 06625
2.4858	INCOLOY® 825	NiCr21Mo	3072.76	NC 21 Fe DU	NA 16	INCOLOY® 825			NCF 825 TB	N 08825
2.4869	Alloy 80/20	NiCr80-20								N 06003
2.4879	Centralloy® 4879	G-NiCr38W								
2.4883	Hastelloy® C276	G-NiMo16Cr								
2.4889	Nicrofer® 45 TM	NiCr28FeSiCe								N 06045
2.4951	Nicrofer® 7520	NiCr20Ti		NC 20 T	HR 5					N 06075

S 1.3 COBALT-BASED ALLOY [HRSA] <1450 N/mm²

Material-number	Tradename	Germany DIN	Europe EN	France AFNOR	GB BS	Italy UNI	Sweden SIS	Spain UNE	Japan JIS	USA AISI
2.4681	ULTIMET® alloy	CoCr26Ni9Mo5W								
2.4682	Stellite® 31	G-CoCr25NiW		KC 25 WN						ASTM A567
2.4683	Conicro® 4023 W	CoCr22NiW								
2.4691	HS 21	G-CoCr28Mo		KC 27 D5 NFe						ASTM F-75
2.4964	Stellite® 25	CoCr20W15Ni		KC 22 WN	HR 240	L605 Haynes® 25				R 30605
2.4979	S 816	CoCr28Mo6								

Technical formulas

Calculate cutting speed (m/min)

$$V_c = \frac{D \cdot \pi \cdot n}{1000}$$

Explanation of terms

Vc	Cutting speed	in m/min
n	Rotational speed	in rpm
Vf	Feed rate	in mm/min
Fz	Feed per tooth	in mm/number of teeth
z	Number of teeth (cutting)	
ap	Depth of cut	in mm
ae	Width of cut	in mm
hm	Average chip thickness	in mm
Q	Chip removal rate	in cm³/min
D	Diameter of tool	in mm

Calculate rotational speed (rpm)

$$n = \frac{V_c \cdot 1000}{D \cdot \pi}$$

Calculate feed rate (mm/min)

$$V_f = n \cdot z \cdot f_z$$

Calculate feed per tooth (mm/number of teeth)

$$f_z = \frac{V_f}{n \cdot z}$$

Calculate chip removal rate (cm³/min)

$$Q = \frac{a_p \cdot a_e \cdot V_f}{1000}$$

Calculate average chip thickness (mm)

$$h_m = f_z \cdot \frac{\sqrt{a_e}}{D}$$

CONVERSION TABLE STRENGTH HARDNESS

Material		Strength (N/mm²)	Hardness (HRC)	Hardness (HB)
P (Steel)				
1.1	STEEL unalloyed	<500	<15,2	<147
1.2-1.5	STEEL unalloyed	<1100	<33,5	<325
2.1-2.2	STEEL low-alloyed	<950	<28,8	<280
2.3-2.4	STEEL low-alloyed	<1300	<40	<385
3.1-3.2	STEEL high-alloyed	<1100	<33,5	<325
3.3	STEEL high-alloyed	<1400	<44	<410
K (Castings)				
1.1-1.2	CASTINGS Grey cast iron	<1000	<30	<295
2.1-2.2	CASTINGS Modular cast iron	<850	<25	<250
3.1-3.2	CASTINGS Malleable cast iron	<800	<24	<235
M (Stainless Steel)				
1.1	STAINLESS STEEL ferritic/martensitic	<850	<25	<250
2.1	STAINLESS STEEL austenitic	<650	<20	<190
2.2	STAINLESS STEEL austenitic	<750	<22	<220
3.1	DUPLEX STEEL super austenitic	<1100	<33,5	<325
N (Non-Ferrous Metal)				
1.1	ALUMINIUM alloyed	<500	<15,2	<147
1.2	ALUMINIUM alloyed	<600	<18,2	<177
2.1-2.3	ALUMINIUM casted	<600	<18,2	<177
3.1-3.3	COPPER alloyed	<650	<20	<190
4.1	MAGNESIUM alloyed	<250	<7,5	<76
5.1	PLASTICS thermoplastic	<100	0	0
5.2	PLASTICS duroplastic	<150	0	0
S (Superalloys)				
1.1	IRON-BASED ALLOY HRSA	<1200	<36	<355
1.2	NICKEL-BASED ALLOY HRSA	<1450	<45	<425
1.3	COBALT-BASED ALLOY HRSA	<1450	<45	<425
T (Titanium)				
2.1-2.2	TITANIUM pure; alloyed	<1000	<30	<295
2.3	TITANIUM alloyed	<1400	<44	<410

GENERAL TERMS OF SALE

§ 1 SCOPE

1. These General Terms of Sale apply to all business relationships between Hofmann & Vratny OHG (hereinafter referred to as “Hofmann & Vratny”) and its customers (hereinafter referred to individually as the “Ordering Party” and collectively as the “Ordering Parties”).

2. These General Terms of Sale only apply to Ordering Parties that are entrepreneurs pursuant to §§ 14 and 310 para. 1 of the BGB (Civil Code of Germany), legal entities under public law, and/or special funds under public law.

3. The scope of application of these General Terms of Sale includes, but is not limited to, contracts regarding the sale and/or delivery of chattels (hereinafter referred to as “Goods”) regardless of whether they are produced by Hofmann & Vratny or procured from suppliers (§§ 433 and 651 of the BGB). Unless agreed upon otherwise, the version of these General Terms of Sale applicable at the time the Ordering Party places an order and in any case the most recent version of these General Terms of Sale provided to the Ordering Party in writing in the form of a master agreement also shall apply to similar contracts made at a later date without Hofmann & Vratny being required to make reference to them in every individual case.

4. These General Terms of Sale shall apply exclusively. These General Terms of Sale also shall apply if and when Hofmann & Vratny executes a delivery without reservation despite having knowledge of the Ordering Party's terms of sale which contradict or deviate from these General Terms of Sale. Any of the Ordering Party's terms of sale which contradict or deviate from these General Terms of Sale shall become part of a contract only with Hofmann & Vratny's express prior consent. Such requirement to consent shall apply in any case even, for example, if the Ordering Party refers to its terms of sale as part of an order placement and Hofmann & Vratny does not object explicitly to such terms.

5. If Hofmann & Vratny and the Ordering Party have entered into any individual agreements, such individual agreements shall prevail over these General Terms of Sale. The content of such individual agreements only can be substantiated by a written contract or by written confirmation from Hofmann & Vratny. Individual agreements (e.g., outline delivery contracts, quality assurance agreements) and information provided in Hofmann & Vratny's order confirmation shall prevail over these General Terms of Sale. In case of doubt, commercial clauses shall be interpreted based on the Incoterms® issued by the International Chamber of Commerce in Paris (ICC) and applicable at the time the contract is entered into.

6. All of the Ordering Party's legal declarations and notifications made with regard to the contract (e.g., in connection with deadlines or notices of defects, rescission, or reduction) shall be made in writing to be effective. In the context of these General Terms of Sale, in writing shall include written and text forms (e.g., letters, e-mails, faxes). Legal requirements regarding form and other verifications including, but not limited to, cases of doubt regarding the legitimation of the notifying party shall remain unaffected.

7. All references to applicable laws shall be for the purpose of clarification only. Unless amended in or excluded expressly from these General Terms of Sale, laws shall apply even without express reference.

§ 2 OFFERS AND ACCEPTANCE

1. All offers made by Hofmann & Vratny shall be subject to change and shall be non-binding including if and when images, drawings, technical documentation, calculations, analyses, other documents or product descriptions of whatever nature (hereinafter referred to as “Documents”) are provided to the Ordering Party if the proprietary rights and copyrights to those Documents are retained by Hofmann & Vratny.

2. All orders for Goods placed by the Ordering Party shall constitute binding offers. Unless stated otherwise in the respective order, Hofmann & Vratny shall be entitled to accept an offer within two weeks after receipt of said offer.

3. Hofmann & Vratny shall accept offers in writing (e.g., in the form of an order confirmation) or by delivering the respective Goods to the Ordering Party.

4. All proprietary rights and copyrights to Documents shall remain with Hofmann & Vratny. Documents marked as confidential shall be forwarded to third parties only with the express written consent of Hofmann & Vratny.

§ 3 DELIVERY DEADLINES AND DEFAULT OF DELIVERY

1. Delivery deadlines shall be agreed upon by Hofmann & Vratny and the individual Ordering Party or shall be specified by Hofmann & Vratny upon acceptance of the order or in the order confirmation.

2. Hofmann & Vratny's compliance with delivery obligations shall be conditional upon the Ordering Party's on-time and proper compliance with the Ordering Party's obligations including, but not limited to, the provision of the papers, permits and approvals required to be provided by the Ordering Party and the receipt by Hofmann & Vratny of the agreed-upon down payment, if any. In the event of delays, the delivery time shall be extended reasonably.

3. If Hofmann & Vratny is unable to meet any binding delivery deadlines for reasons beyond the control of Hofmann & Vratny (non-availability of services), the Ordering Party shall be notified without undue delay and shall be provided with an estimated new delivery deadline. If the agreed upon Goods do not become available before the new deadline expires, Hofmann & Vratny shall be entitled to rescind the contract in whole or in part and shall reimburse the Ordering Party without undue delay for any and all consideration paid up to that time. For the fulfillment of this clause, non-availability of services shall include, but shall not be limited to, delayed delivery from any of Hofmann & Vratny's suppliers for reasons beyond the control of Hofmann & Vratny or its suppliers, or if Hofmann & Vratny is not responsible for procuring the Goods.

4. If failure to comply with a delivery deadline is due to an act of God, industrial dispute or other event beyond the control of Hofmann & Vratny, the delivery time shall be extended reasonably. The same shall apply if and when any such act of God, industrial dispute or other event has arisen at any of Hofmann & Vratny's sub-suppliers which event can be demonstrated to have had an impact on compliance with the delivery deadline. Hofmann & Vratny shall notify the Ordering Party of such circumstances without undue delay. Events also shall be deemed to be beyond Hofmann & Vratny's control if and when they occur during a delay. In this case, the delay shall be deemed to be suspended for the duration of the respective event.

5. The beginning of a period of delivery default shall be in accordance with the law, but shall in any case require a reminder issued by the Ordering Party.

6.If a contract regarding stand-by delivery has been signed, Hofmann & Vratny shall deliver and invoice the Goods no later than 12 months after the date of such contract (hereinafter referred to as the “Recall Period”), even if the Ordering Party has failed to recall the Goods by that time. After the Recall Period has expired, Hofmann & Vratny can notify the Ordering Party of Hofmann & Vratny's readiness to deliver and can request that the Ordering Party recall the Goods within a reasonable period of time. If the Ordering Party fails to recall the Goods within such period, Hofmann & Vratny shall be entitled to demand an additional lumpsum compensation for warehousing costs (hereinafter referred to as the “Warehousing Allowance”). The Warehousing Allowance shall be 0.5% of the net value of the purchased Goods for every full week, but shall not exceed 5% of the net value of the purchased Goods in total. The Ordering Party shall be free to prove that Hofmann & Vratny did not incur any damages or that any damages incurred were lower than the Warehousing Allowance. If the Ordering Party fails to recall the Goods within the Recall Period determined by Hofmann & Vratny, Hofmann & Vratny shall be entitled to dispose of the Goods as Hofmann & Vratny sees fit. The statutory provisions regarding rescission shall remain unaffected.

§ 4 DELIVERY AND DEFAULT OF ACCEPTANCE

1. Unless agreed upon otherwise, all deliveries shall be ex works, that is, the place of performance for deliveries and for all subsequent actions. Unless agreed upon otherwise, upon request and at the expense of the Ordering Party the Goods shall be delivered to another destination (hereinafter referred to as "Sales Involving the Carriage of Goods"). Unless agreed upon otherwise, Hofmann & Vratny shall be entitled to determine the shipment method (including, but not limited to, the forwarder, the type of shipment and the packaging).

2. Partial deliveries shall be admissible, provided the Ordering Party reasonably can be expected to accept them.

3. Delivered Goods shall be accepted by the Ordering Party even if the delivered Goods have minor defects provided the Ordering Party reasonably can be expected to accept such Goods.

4. The risk of accidental destruction and/or deterioration of the Goods shall transfer to the Ordering Party no later than upon surrender of the Goods. In the case of Sales Involving the Carriage of Goods, the risk of accidental destruction and/or deterioration of the Goods and the risk of delay shall transfer to the Ordering Party no later than at the time of delivery of the Goods to the forwarder, carrier, or any other person designated to execute shipment of the Goods. Delivery shall be deemed to have been effected even if the Ordering Party is in default of acceptance.

5. If the Ordering Party is in default of acceptance or fails to cooperate or if delivery is delayed for other reasons for which the Ordering Party is responsible, Hofmann & Vratny shall be entitled to demand reimbursement for the damages incurred in connection therewith including additional expenses (e.g., warehousing costs).

§ 5 TERMS OF PAYMENT

1. Unless agreed upon otherwise in individual cases, Hofmann & Vratny's prices plus statutory sales tax valid at the time the contract is signed shall apply. The prices indicated in Hofmann & Vratny's catalogs are non-binding and subject to change and/ or correction.

2. Unless agreed upon otherwise, in the case of Sales Involving the Carriage of Goods the Ordering Party shall bear the costs of packaging and transportation ex works and the costs, if any, for transportation insurance if such insurance is requested by the Ordering Party. All customs and other fees, taxes and other public charges also shall be borne by the Ordering Party unless agreed upon otherwise. Ownership of the packaging for transportation and otherwise pursuant to the Verpackungsordnung (Packaging Ordinance of Germany) shall transfer to the Ordering Party and such packaging shall not be returned to Hofmann & Vratny. Pallets shall be exempt from this rule.

3. Unless agreed upon otherwise in the order confirmation, the purchase price plus statutory sales tax shall be due and payable without any deductions within 14 days after the date of invoicing and delivery or acceptance of the Goods. However, Hofmann & Vratny reserves the right to make full or partial deliveries against cash in advance at any time including during an ongoing business relationship. The assertion of such right shall be communicated no later than at the time the order confirmation is issued. The Ordering Party shall be deemed to be in default of payment upon the expiration of the aforementioned payment deadline. The applicable rate of interest on the purchase price of the Goods shall become payable during the default period. The right to assert claims for more substantial compensation shall be reserved. Hofmann & Vratny's right to claim commercial-rate default interest (§ 353 of the HGB) shall remain unaffected.

4. The Ordering Party's rights of set-off and retention shall be limited to the extent the Ordering Party's claim is determined in a court of law or is undisputed. The Ordering Party's rights based on defects in the purchased Goods (see § 7 hereof) shall remain unaffected.

5. After the contract has been signed, if there is evidence that Hofmann & Vratny's claim to the purchase price will be compromised due to lack of performance on the part of the Ordering Party, Hofmann & Vratny shall be entitled to refuse performance pursuant to the applicable laws and, after setting a deadline, if applicable, shall be entitled to rescind the contract. In the case of contracts regarding the production of customized items, Hofmann & Vratny shall be entitled to rescind the contract immediately and the laws regarding the expendability of setting deadlines shall remain unaffected.

§ 6 RETENTION OF TITLE

1. Until all pending and future receivables in connection with the business relationship between Hofmann & Vratny and the Ordering Party are paid in full, Hofmann & Vratny shall retain ownership of the Goods. If the Ordering Party violates the contract including, but not limited to, default of payment, Hofmann & Vratny shall be entitled to rescind the contract pursuant to the applicable laws and to demand the surrender of the Goods.

2. Goods subject to retention of title shall not be pledged or assigned as collateral before the Ordering Party has paid in full. The Ordering Party shall notify Hofmann & Vratny in writing without undue delay in the event of a fling for commencement of insolvency proceedings or if third parties gain access (e.g., seizures) to Goods belonging to Hofmann & Vratny.

3. If the Ordering Party violates the contract including, but not limited to, by failing to pay the purchase price when due, Hofmann & Vratny shall be entitled to rescind the contract pursuant to the applicable laws and to demand the surrender of the Goods due to the retention of title and the rescission.

4. Until further notice, the Ordering Party shall be entitled to resell/and or process in the ordinary course of business any Goods subject to retention of title. In this case, the provisions below also shall apply.

a) The retention of title shall include title to the full value of work products resulting from processing, mixing or combining the Goods, in which case Hofmann & Vratny shall be deemed to be the manufacturer. If and when third-party goods are processed, mixed or combined and such third parties retain ownership, Hofmann & Vratny shall acquire coownership pro rata of the invoiced value of work products so processed, mixed or combined. In all other cases, the creation of work products shall be subject to the same provisions as the delivered Goods subject to retention of title.

b) The Ordering Party hereby agrees to assign to Hofmann & Vratny as collateral any and all receivables against third parties resulting from the resale of the Goods or work results in full or in the amount of Hofmann & Vratny's estimated share of co-ownership pursuant to a) above, and Hofmann & Vratny hereby accepts such assignment. The Ordering Party's obligations under § 6 2) hereof also shall apply with respect to the receivables assigned.

c) In addition to Hofmann & Vratny, the Ordering Party shall remain authorized to collect receivables. Hofmann & Vratny undertakes to refrain from collecting receivables as long as the Ordering Party meets its payment obligations vis-à-vis Hofmann & Vratny and does not fail to perform and Hofmann & Vratny does not assert its retention of title by asserting a right under § 6 3) hereof. Otherwise, Hofmann & Vratny shall be entitled to demand that the Ordering Party inform Hofmann & Vratny of such receivables assigned and of the names of the debtors, provide Hofmann & Vratny with all the information required for collecting such receivables and the pertinent documents, and inform the debtors (third parties) of the assignment. In addition, in this case Hofmann & Vratny shall be entitled to revoke the Ordering Party's authorization to resell and/or process Goods which are subject to retention of title.

5. Upon request of the Ordering Party, Hofmann & Vratny shall release the collateral to which Hofmann & Vratny is entitled insofar as the realizable value of such collateral exceeds the receivables to be collateralized by more than 10 percent. Hofmann & Vratny shall be free in its decision regarding which collateral to release.

§ 7 LIABILITY FOR DEFECTS AND CLAIMS FOR DEFECTS

1. Unless otherwise agreed upon herein, the Ordering Party's rights based on defects in quality and/or in title (including delivery of the wrong Goods or insufficient amounts, improper assembly/installation, or incomplete instructions) shall be subject to the applicable laws. The special legal stipulations regarding reimbursement of expenses at the time of delivery of newly produced Goods (supplier's recourse as specified in §§ 478, 445a, 445b and §§ 445c, 327 para. 5, 327u of the BGB) shall remain unaffected in any case, unless equal-value compensation has been agreed upon, for example, as part of a quality assurance agreement.

2. Hofmann & Vratny's liability for defects shall be based first and foremost on the respective agreement entered into regarding the quality and the pos-tulated use of the Goods (including fittings and instructions). In this context, an agreement regarding the quality of Goods shall be any and all product descriptions and manufacturer-provided information outlined in the individual

agreement or made publicly known by Hofmann & Vratny (including, but not limited to, in catalogs or on Hofmann & Vratny's internet homepage) at the time the contract was signed. However, if and when no agreement regarding quality has been entered into, the presence or absence of a defect shall be determined based on the legal regulations (§ 434 para. 3 of the BGB). State-ments made publicly by the manufacturer or on the manufacturer's behalf including, but not limited to, in advertising materials or on labels on the Goods shall prevail over other third parties' statements. In the case of Goods comprising digital elements or other digital content, Hofmann & Vratny shall be responsible for providing and, if required, updating the digital content only if defined expressly in an agreement regarding the quality of Goods, as stipulated above. Hofmann & Vratny shall not assume any liability for public statements made by the manufacturer or other third parties.

3. Hofmann & Vratny shall not assume liability for any defects of which the Ordering Party is aware, or for any defects of which the Ordering Party is grossly negligent if it is not aware (§ 442 of the BGB) at time the contract is signed. The assertion of claims by the Ordering Party regarding defects shall be conditional upon the Ordering Party's meeting of its statutory duty to inspect and to give notice of defects (§§ 377 and 381 of the HGB (Commercial Code of Germany)). If a defect in the Goods becomes apparent during or after inspection, the Ordering Party shall give written notice to Hofmann & Vratny without undue delay. Regardless of the Ordering Party's duty to inspect and to give notice of defects, the Ordering Party shall give written notice of obvious defects within two weeks after delivery, which notice shall be deemed to have been given in a timely manner if it is transmitted before the end of such period. If the Ordering Party fails to inspect the Goods properly and/or to give proper notice of any defects, Hofmann & Vratny shall not assume liability for any defects for which no notice was given.

4. If any of the Goods are defective, Hofmann & Vratny shall be free to offer supplementary action to remedy the defect or defects (supplementary remedy) or to deliver defect-free Goods (replacement) to the Ordering Party. In individual cases, the Ordering Party may refuse a supplementary action selected by Hofmann & Vratny that the Ordering Party considers to be unreasonable. It is Hofmann & Vratny's right to refuse to offer supplementary action under the applicable laws shall remain unaffected. The requirement for Hofmann & Vratny to provide any supplementary action owed shall be conditional upon the Ordering Party's paying of the purchase price when due. However, the Ordering Party shall be entitled to retain a reasonable portion of the purchase price pro rata in consideration of the defect. The Ordering Party shall give Hofmann & Vratny the time and the opportunity to provide the supplementary action owed including, but not limited to, providing Hofmann & Vratny the opportunity to inspect the Goods which are subject to complaint. If Hofmann & Vratny opts to replace the Goods, at Hofmann & Vratny's request the Ordering Party shall return the defective Goods to Hofmann & Vratny in accordance with the applicable laws; however, the Ordering Party shall not have the right to request to return the defective Goods. Supplementary action shall not include the disassembly, removal, or de-installation of defective Goods nor the assembly, mounting, or installation of defect-free Goods, provided Hofmann & Vratny was not originally obligated to provide such services; any rights the Ordering Party may have to be reimbursed for such costs (hereinafter referred to as "Disassembly and Assembly Costs") shall remain unaffected.

5. If in fact a defect is present, any and all expenses incurred in connection with inspections and supplementary action including, but not limited to, transportation, road, labor and material costs, and Disassembly and Assembly Costs shall be borne by Hofmann & Vratny in accordance with the laws and these General Terms of Sale. However, if the Ordering Party's demand for remedy of a defect is proven to be invalid because the Ordering Party was aware or was grossly negligent if it was not aware that no defect actually was present, Hofmann & Vratny can demand reimbursement from the Ordering Party for any costs incurred therewith. If the costs of supplementary remedy would be disproportionately high, the Ordering Party shall not be entitled to claim remedy of defects.

6. If and when a reasonable deadline for supplementary action set by the buyer has expired unsuccessfully or can be disregarded under the law, the Ordering Party can rescind the purchasing contract in accordance with the law or reduce the purchase price. However, no right to rescind shall apply in the case of insignificant defects.

7. The Ordering Party's claims for damages or reimbursement for wasted expenses shall be limited by the provisions of § 8 below and shall be excluded in all other cases.

8. The statute of limitations for claims for defects in quality and in title shall be one year after delivery of the Goods. The statute of limitations shall commence

upon delivery of the Goods provided acceptance has been agreed upon. Other special legal stipulations regarding statutes of limitations (including, but not limited to, § 438 para. 1 no. 1, no. 2, para. 3, §§ 444, 445b of the BGB) shall remain unaffected. The aforementioned statutes of limitations specified in the purchasing laws also shall apply to any contractual and extra-contractual claims for reimbursement made by the Ordering Party based on a defect in the Goods, unless applying the regular statute of limitations stipulated by law (§§ 195, 199 of the BGB) would result in a reduced statute of limitations in individual cases. Any claims for reimbursement the Ordering Party may have pursuant to § 8 para. 2 p. 1 and p. 2 (a) and pursuant to the Produkthaftungs-gesetz (Product Liability Act of Germany) shall be subject exclusively to the statutes of limitations stipulated by law.

§ 8 OTHER LIABILITIES

1. Unless agreed upon otherwise in these General Terms of Sale and in the provisions below, Hofmann & Vratny's liability for breach of contractual and non-contractual obligations shall be in accordance with the applicable laws.

2. Hofmann & Vratny's liability for damages, regardless of the legal reasons and of whether or not they are known, as part of Verschuldenshaftung (liability arising from damage caused by negligent act) shall include intent and gross negligence. Subject to the limitations of liability stipulated by law (e.g., diligence with its own affairs, insignificant breach of duty), in the event of minor negligence Hofmann & Vratny's liability shall be limited to (a) damages resulting from harm to life, body or health and/or (b) damages resulting from the not-insignificant breach of a material contractual obligation, that is, an obligation which must be met to make the proper fulfillment of the contract possible and the meeting of which the Ordering Party relies upon and can rely upon on a regular basis. In this case, however, Hofmann & Vratny's liability shall be limited to reimbursement of the foreseeable damages typical in such cases.

3. The limitation of liability specified above also shall apply vis-à-vis third parties and in the event of a breach of duty by any person (including to his/ her own benefit) for which Hofmann & Vratny is responsible by law; however, it shall not apply if and when Hofmann & Vratny is found to have failed to disclose a defect maliciously or has assumed a guarantee for the quality of the Goods and for the Ordering Party's claims under the Produkthaftungsgesetz.

4. The Ordering Party can rescind or cancel a contract due to a breach of obligation other than a breach based on a defect only if and when Hofmann & Vratny is responsible for such breach of obligation. The Ordering Party shall not have an unrestricted right to terminate a contract. All other cases shall be subject to the applicable laws and legal consequences.

§ 9 APPLICABLE LAW AND JURISDICTION

1. These General Terms of Sale and all legal relationships between Hofmann & Vratny and the Ordering Party shall be subject to the laws of the Federal Republic of Germany under exclusion of the provisions of uniform international law. The CISG shall not apply.

2. Any and all disputes arising directly or indirectly from the contractual relationship shall be subject exclusively, including at an international level, to the jurisdiction of Aßling if the Ordering Party is a businessperson as defined in the Handelsgesetzbuch (Commercial Code of Germany), a legal entity under public law, or a special fund under public law. The same shall apply if the Ordering Party is an entrepreneur pursuant to §§ 14 of the BGB. However, in any case Hofmann & Vratny shall be entitled to sue the Ordering Party at the place of performance of the obligation to deliver under these General Terms of Sale and/or under a prevailing individual agreement or at the Ordering Party's general jurisdiction. Prevailing legal regulations including, but not limited to, regarding exclusive jurisdictions, shall remain unaffected.

Hofmann & Vratny OHG
June 2022

CONTACT
HOFMANN & VRATNY

Hofmann & Vratny OHG - Headquarters

Steinkirchen 4½
85617 Aßling

Telephone: +49 80 92 / 85 333-0
E-Mail: info@vhmhv.de

Hofmann & Vratny OHG - Regrinding centre

Steinkirchen 4½
85617 Aßling

Telephone: +49 80 92 / 85 333-152
E-Mail: nbg@vhmhv.de

A RELIABLE PARTNER

DISCOVER OUR
H&V PRODUCT RANGE.

Our goal is to provide companies around
the world with the best tools.

We are constantly developing our product portfolio. We experiment with new
geometries, coatings and materials at our research and development center
to make the right milling cutters for every application.

SCAN THE
QR CODE NOW



EXPERT | Non-ferrous materials



EXPERT | Steel & cast iron



EXPERT | Stainless steel




EXPERT | Titanium



EXPERT | Hardened steel





EN

HOFMANN & VRATNY BCU1 SERIES - SOLID QUALITY FOR PRICE- SENSITIVE APPLICATIONS

Hofmann & Vratny OHG

Steinkirchen 4½

85617 Aßling

Telephone: +49 80 92 / 85 333-0

E-Mail: info@vhmhv.de

Web: www.vhmv.de

OFFICIAL PARTNER OF H&V



SolidCAM
The Ecosystem for Digital Manufacturing

Die einzigartige, revolutionäre Frästechnologie
imachining[®]
patent by SolidCAM